#### **DESCRIPTION**

LOW NOISE AMPLIFIER DESIGNED FOR MILITARY AND INDUSTRIAL APPLICATIONS. THIS AMPLIFIER IS SUPPLIED IN OUR STANDARD PE2 HOUSING THAT CAN BE USED AS AN SMA CONNECTORIZED OR A SURFACE MOUNT COMPONENT. OTHER PACKAGES AND CONNECTOR TYPES ARE AVAILABLE. THIS MODEL PROVIDES THE FOLLOWING PERFORMANCE. DATA IS AVAILABLE UPON REQUEST.

#### **SPECIFICATIONS**

- FREQUENCY RANGE: 1.0 to 18.0 GHZ
- GAIN:———— 45dB TYPICAL
- GAIN FLATNESS: ±1.5dB MAXIMUM
- NOISE FIGURE:
   4.5dB TYPICAL
- OP1dB:------+20dBm MINIMUM

\*EXCLUDING CONNECTORS\*

• FINISH — GOLD PLATED

#### **FEATURES**

- INTERNAL VOLTAGE REGULATION
- UNCONDITIONAL STABILITY

#### AVAILABLE OPTIONS

- VARIOUS PACKAGE TYPES
- VARIOUS CONNECTOR TYPES
- TEMPERATURE COMPENSATION
- GAIN AND PHASE MATCHING
- MIL-STD-883 SCREENING AVAILABLE

#### ENVIRONMENTAL RATINGS

- TEMPERATURE: -54°C TO + 85°C (OPERATING)
  - $-65^{\circ}$ C TO  $+125^{\circ}$ C (STORAGE)
- HUMIDITY: \_\_\_\_\_\_ MIL-STD-202F, METHOD 103B COND. B
- SHOCK: \_\_\_\_\_ MIL-STD-202F, METHOD 213B COND. B
- ALTITUDE: \_\_\_\_\_ MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES

TOLERANCES:

X.XX ±0.020

X.XXX ±0.010


 REVISIONS

 ZONE
 REV.
 DESCRIPTION
 DATE
 APPROVED


 —
 PRELIMINARY
 7/10/18

# MECHANICAL OUTLINE

#### PE2 HOUSING WITH CARRIER

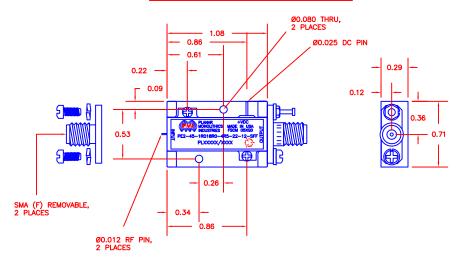

### PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

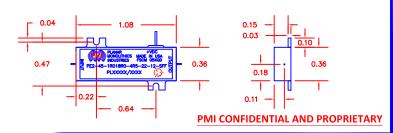

## PLANAR MONOLITHICS INDUSTRIES, INC

7311-F GROVE ROAD FREDERICK, MARYLAND 21704 USA TEL: 301-662-5019 FAX: 301-662-1731 WEBSITE: www.pmi-rf.com E-MAIL: sales@pmi-rf.com

ISO 9001 CERTIFIED



			TITLE							
APPROVALS	DATE	PRODUCT FEATURE								
drawn $\mathcal{K}\mathcal{M}$	8/1/14	PE2-45-1R018R0-4R5-22-12-SFF								
REDRAWN (OGI)	7/10/18	SIZE			DWG NO.				REV.	
EW	7/10/18	Α	05XQ0		PRELIMINARY			-		
ISSUED		SCALE N:S					SHEET	1 0	1	
		SCALE	- IV.5				SHEET	I OF		