

DESCRIPTION

LOW NOISE AMPLIFIER DESIGNED FOR MILITARY AND INDUSTRIAL APPLICATIONS. THIS AMPLIFIER IS SUPPLIED IN OUR STANDARD PE2 HOUSING THAT CAN BE USED AS AN SMA CONNECTORIZED OR A SURFACE MOUNT COMPONENT. OTHER PACKAGES AND CONNECTOR TYPES ARE AVAILABLE. THIS MODEL PROVIDES THE FOLLOWING PERFORMANCE. DATA IS AVAILABLE UPON REQUEST.

SPECIFICATIONS

- FREQUENCY RANGE: 0.03 to 26.5 GHZ
- GAIN: 30dB TYPICAL
- GAIN FLATNESS: ± 2.5 dB MAXIMUM
- NOISE FIGURE: 5.5dB TYPICAL
- OP1dB: 16dBm MINIMUM
- VSWR (IN/OUT): 2.0:1 MAXIMUM
- CONNECTORS: SMA (F) REMOVABLE
- DC SUPPLY: +12 TO +15VDC @ 480mA MAXIMUM
- SIZE (L) 1.08" X (W) 0.71" X (H) 0.29"
EXCLUDING CONNECTORS
- FINISH GOLD PLATED

FEATURES

- INTERNAL VOLTAGE REGULATION
- UNCONDITIONAL STABILITY
- STANDARD OPERATING TEMPERATURE
-20 TO +70 DEG. C

AVAILABLE OPTIONS

- VARIOUS PACKAGE TYPES
- VARIOUS CONNECTOR TYPES
- TEMPERATURE COMPENSATION
- HERMETIC SEALING
- GAIN AND PHASE MATCHING
- MIL-STD-883 SCREENING AVAILABLE

ENVIRONMENTAL RATINGS


- TEMPERATURE: -20°C TO + 70°C (OPERATING); -55 TO +85 DEG C AVAILABLE
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	1	ORIGINAL RELEASE	2/1/08
			APPROVED

MECHANICAL OUTLINE

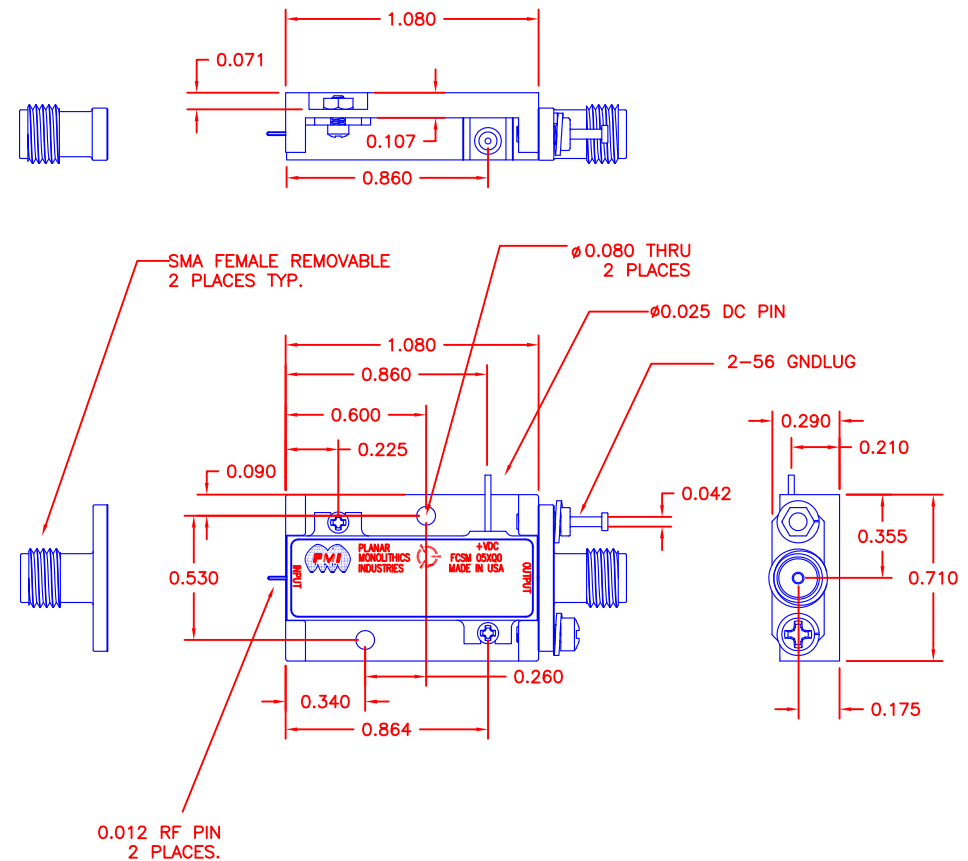

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE			
DRAWN		K. Mason		2/21/08		PRODUCT FEATURE	
CHECKED						PE2-30-30M26R5-5R5-18-12-SFF	
ISSUED						PRELIMINARY	
SCALE		N:S		FSCM NO.		DWG NO.	
				A		05XQ0	
						REV.	
						1	
				SHEET		1 OF 1	