

DESCRIPTION

PMI MODEL: LNA-32-0D3M90M-3D0-10-12-SFF IS A LOW NOISE AMPLIFIER OPERATING OVER THE 0.3 TO 90 MHz FREQUENCY RANGE. THIS MODEL OFFERS A MINIMUM GAIN OF 32 dB WHILE MAINTAINING A MAXIMUM NOISE FIGURE OF 3.0 dB. THIS COMPACT MODEL IS OUTFITTED WITH FEMALE SMA CONNECTORS.

SPECIFICATIONS

- FREQUENCY RANGE: 0.3 TO 90 MHz
- GAIN: 32 dB MINIMUM
33 dB TYPICAL
- P1dB: 10 dBm MINIMUM
- IP3: 30 dBm MINIMUM
- NOISE FIGURE: 3.0 dB MAXIMUM
- DC SUPPLY: +12 VDC @ 100 mA TYPICAL
- CONNECTORS: SMA FEMALE
- SIZE: 31.75 mm x 31.75 mm x 14.30 mm
1.25" x 1.25" x 0.563"
- FINISH: BLUE EPOXY POLIMIDE COATING
IAW MIL-C-22750, TYPE I OVER
EPOXY POLIMIDE PRIMER IAW
MIL-P-23377, TYPE I, CLASS 1 OR 3.


ENVIRONMENTAL RATINGS

- TEMPERATURE: -55 °C TO +85 °C (OPERATING)
-65 °C TO +125 °C (STORAGE)
- HUMIDITY: MIL-STD-202, METHOD 103B COND. B
- SHOCK: MIL-STD-202, METHOD 213B COND. B
- VIBRATION: MIL-STD-202, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

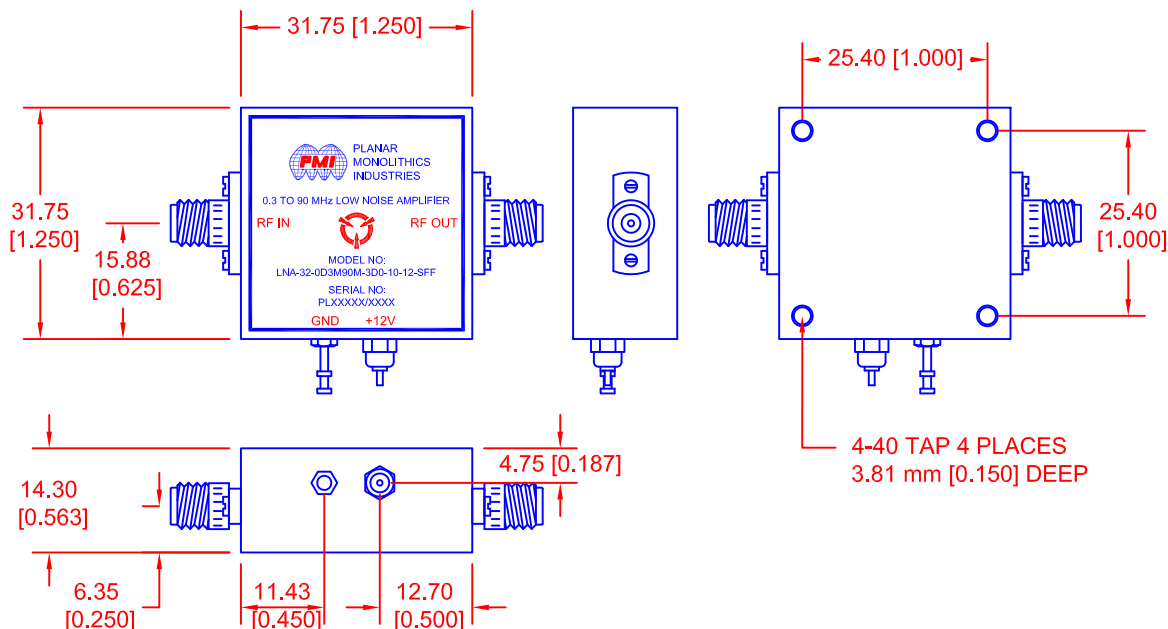

ALL DIMENSIONS
ARE IN mm [INCH]
TOLERANCES:
X.XX ± 0.508 [0.020]
X.XXX ± 0.254 [0.010]

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	09/21/16	

MECHANICAL OUTLINE

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN <i>B. Thomas</i>		09/21/16		PRODUCT FEATURE LNA-32-0D3M90M-3D0-10-12-SFF 0.3 to 90 MHz Low Noise Amplifier	
CHECKED				SIZE A	FSCM NO. 05XQ0
ISSUED				DWG NO. 27030861	REV. A1
SCALE N:S				SHEET 1 OF 1	