


DESCRIPTION:

PFC model number 9CL16D9G-3G-CD-SFF is a Combine filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

SPECIFICATIONS:

- CENTER FREQUENCY: 16.9 GHz
- 3dB BANDWIDTH: 3000 MHz
- VSWR IN THE PASS BAND: 1.5:1 MAX.
- INSERTION LOSS (PASSBAND) ≤ 1.5 dB MAX.
- REJECTION: 9 Section Response

- CONNECTORS: SMA FEMALE CONNECTORS
- SIZE 1.70" (L) x 0.625" (W) x 0.40" (H)
- WEIGHT 1 OZ. TYP.

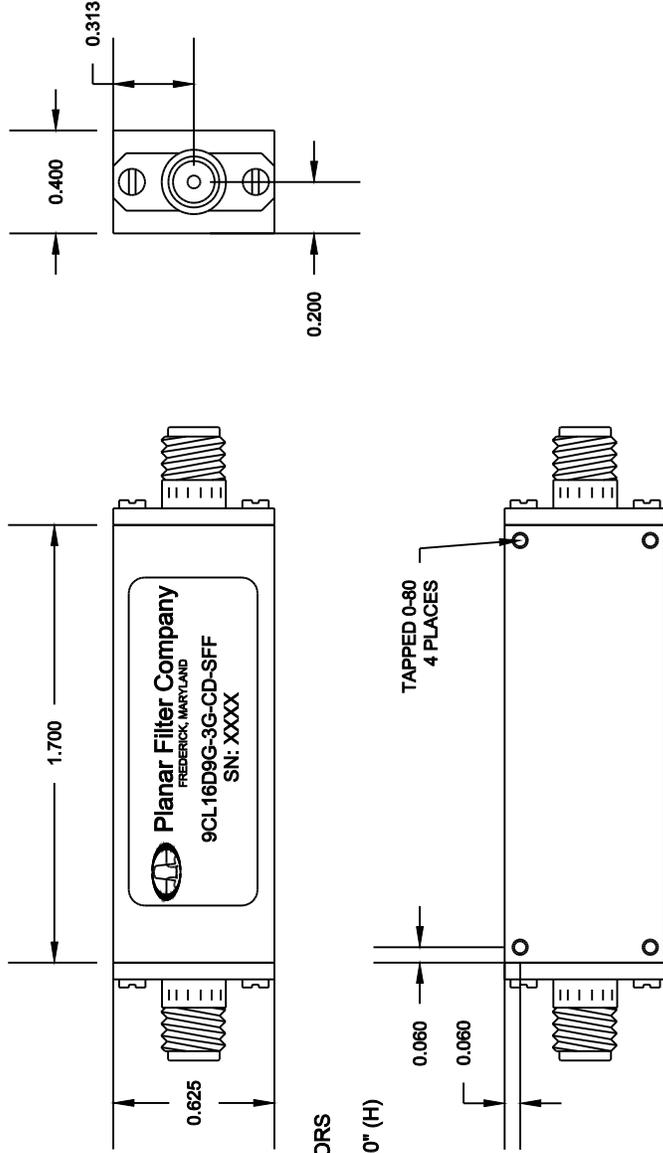

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS		DATE	APPROVED
ZONE	REV.	DESCRIPTION	
	-	ORIGINAL RELEASE	4/4/01

PART NO. 155-0671		TITLE	
APPROVALS	DATE	Planar Filter Company 7311G Grove Road, Fredrick, Maryland	
DRAWN S. PALACID	4/4/01	OUTLINE DRAWING 9CL16D9-3G-CD-SFF	
CHECKED		SIZE	FSCM NO.
ISSUED		A	1QJWO
		DWG NO.	155-0671
		SCALE	N/A
		SHEET	1 OF 1

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.010
X.XXX ±0.005