

DESCRIPTION

PMI MODEL: 4CL64R5-3-CD-PIN-3dBIL IS A COMBLINE BANDPASS FILTER CENTERED AT 64.512 MHz WITH A 3 MHz BANDWIDTH. THIS FILTER FEATURES HIGH OUT OF BAND REJECTION AND LOW PASSBAND INSERTION LOSS.

SPECIFICATIONS

- CENTER FREQUENCY: ----- 64.512 MHz
- 3 dB BANDWIDTH: ----- 5% MINIMUM
- INSERTION LOSS: ----- 3.0 dB MAXIMUM
- PASS BAND RIPPLE: ----- 1.0 dB MAXIMUM
- REJECTION: -----
 - 60 dB MAXIMUM ABOVE 129 MHz
 - 60 dB MAXIMUM @ 129 MHz
 - 72 dB MAXIMUM @ 32.5 MHz
- VSWR: ----- 1.35:1 MAXIMUM
- IMPEDANCE: ----- 50 Ω (INPUT/OUTPUT)
- CONNECTORS: ----- PIN
- SIZE: ----- 0.310" x 0.310" x TBD"
 - 7.874 mm x 7.874 mm x TBD mm
- FINISH: ----- GOLD PLATED

ENVIRONMENTAL RATINGS

- TEMPERATURE: ----- -40 °C TO +85 °C (OPERATING)
- HUMIDITY: ----- MIL-STD-202, METHOD 103B COND. B
- SHOCK: ----- MIL-STD-202, METHOD 213B COND. B
- VIBRATION: ----- X, Y, & Z Axes, 6 Grms, 10 Min
- ALTITUDE: ----- MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE: ----- MIL-STD-202, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE


NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

ALL DIMENSIONS
ARE IN INCHES (mm)
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	9/16/16	

MECHANICAL OUTLINE

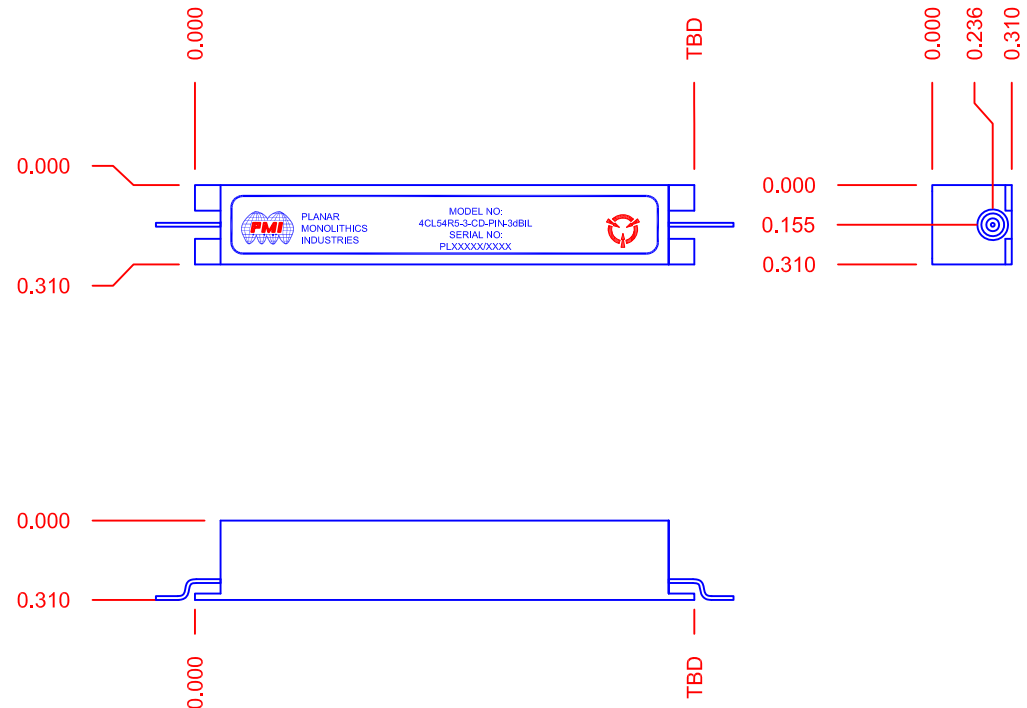

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE		
DRAWN		M. Berry		09/16/16		PRODUCT FEATURE 4CL64R5-3-CD-PIN-3dBIL
CHECKED						
ISSUED						
SIZE	A	FSCM NO.	05XQ0	DWG NO.	PRELIMINARY	REV.
SCALE	N:S					-
					SHEET	1 OF 1