


DESCRIPTION:

PMI model number HP0R5G-18G-CD-SFF is a Highpass filter with SMA female connectors in and out.

SPECIFICATIONS:

- PASSBAND (3dB): _____ 500 MHz TO 18000 MHz
- VSWR IN THE PASS BAND: _____ 2.0:1 MAX
- INSERTION LOSS (PASSBAND): _____ 2.0 dB TYP.
- REJECTION AT 300 MHz: _____ 40 dB TYP.
- CONNECTORS: _____ SMA FEMALE CONNECTORS
- SIZE: _____ 1.00" (L) x 0.71" (W) x 0.32" (H)
- WEIGHT: _____ 1 OZ. TYP.

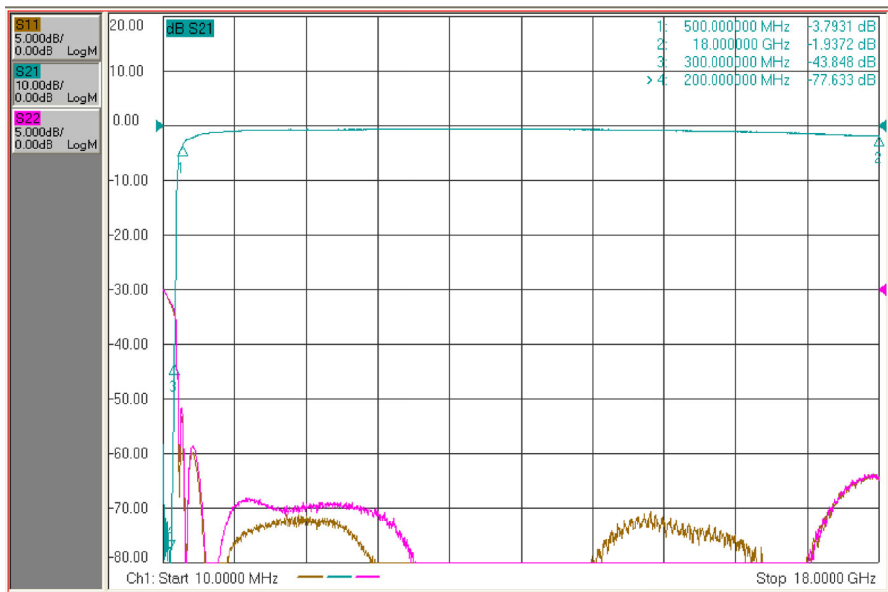



TYPICAL PERFORMANCE S-PARAMETERS

ENVIRONMENTAL RATINGS:

- TEMPERATURE: _____ -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: _____ MIL-STD-202F, METHOD 103B COND. B
- SHOCK: _____ MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: _____ MIL-STD-202F, METHOD 204D COND. B
- TEMPERATURE CYCLE: _____ MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	INITIAL RELEASE	11/06/18	
	B1	ECN # 19-0015	1/29/19	
	C1	MECHs & SPECs UPDATES	3/21/19	

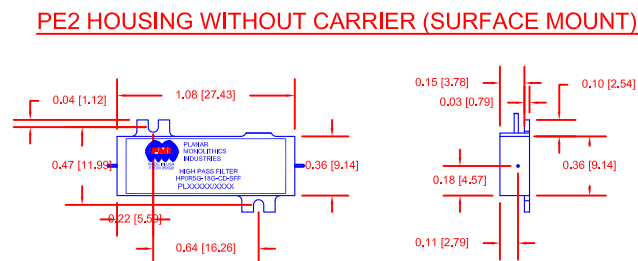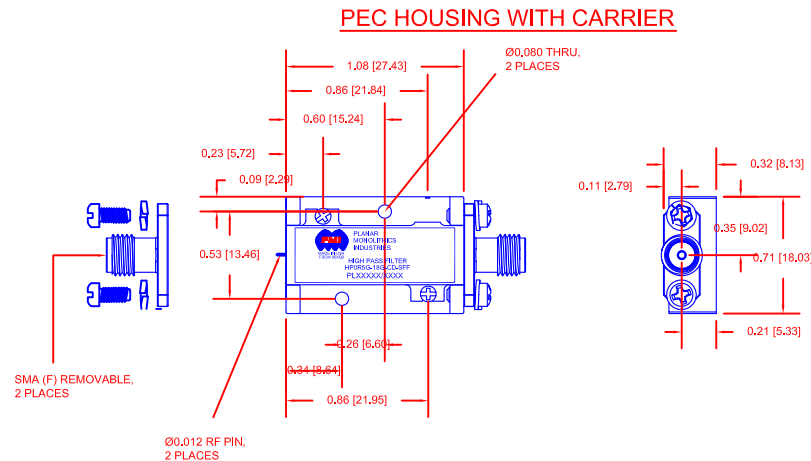

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



		TITLE PRODUCT FEATURE HP0R5G-18G-CD-SFF			
APPROVALS	DATE				
DRAWN S PALABO	3/21/10				
REDRAWN GJR	11/6/18	SIZE A	FSCM NO. 05XQ0	DWG NO. 27035801	REV C1
ISSUED		SCALE N:S	SHEET 1 OF 1		