


REVISIONS		
ZONE	REV.	DATE
	-	9/15/98
ORIGINAL RELEASE		

SPECIFICATIONS:

- LC Bandpass filter
- Center Frequency: 136 MHz
- 3dB bandwidth: 10 MHz
- Rejection: DC to 130 MHz <-70dB
- Rejection: @ 144 MHz <-35dB
- Vswr: 1.5:1
- I.L. -8 dB
- Input/ Output Impedance 50 ohms
- INPUT POWER LEVEL: 1 watts
- In/ Out connector PC PINS .015 dia.
- SIZE 1.700" (L) X 0.310" (W) X 0.310" (H)
- WEIGHT 1.0 OZ. TYP.

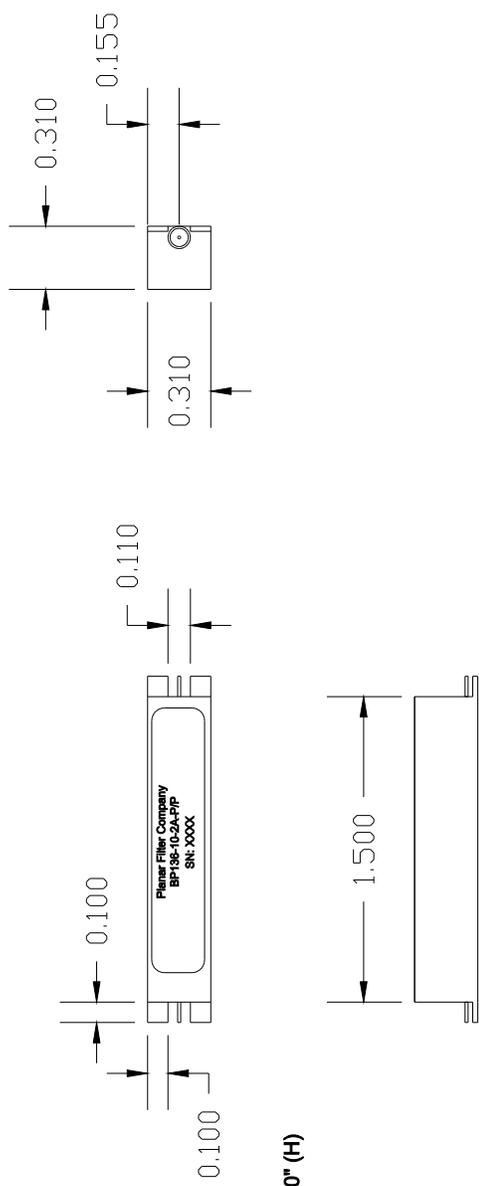

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PART NO.	
APPROVALS	DATE
DRAWN K STIMMS	9/15/98
CHECKED	
ISSUED	

PLANAR FILTER COMPANY 7311G GROVE RD., FREDERICK, MARYLAND	
TITLE OUTLINE DRAWING BP136-10-2A-P/P	
SIZE A	FSCM NO. OZXZ8
DWG. NO. BP136-2A-P-P.DWG	REV. -
SCALE 1:1	SHEET 1 OF 1