

DESCRIPTION:

PMI model number 8C1960-60-CD-SFF is a Cavity filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

SPECIFICATIONS:

- CENTER FREQUENCY: · · · · · 1960 MHz
- 3dB BANDWIDTH: · · · · · 60 MHz
- VSWR IN THE PASS BAND: · · · · · 1.5:1 MAX.
- INSERTION LOSS (PASSBAND) · · · · · 1.5 dB MAX.
- REJECTION 8 POLE RESPONSE


- CONNECTORS: · · · · · SMA FEMALE CONNECTORS
- SIZE · · · · · 6.60" (L) x 1.20" (W) x 1.30" (H)
- WEIGHT · · · · · 1 OZ. TYP.

ENVIRONMENTAL RATINGS:

- TEMPERATURE: · · · · · -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: · · · · · MIL-STD-202F, METHOD 103B COND. B
- SHOCK: · · · · · MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: · · · · · MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: · · · · · MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: · · · · · MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: · · · · · MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: · · · · · MIL-STD-202F, METHOD 107

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.010
X.XXX ±0.005

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	—	ORIGINAL RELEASE	1/21/08	

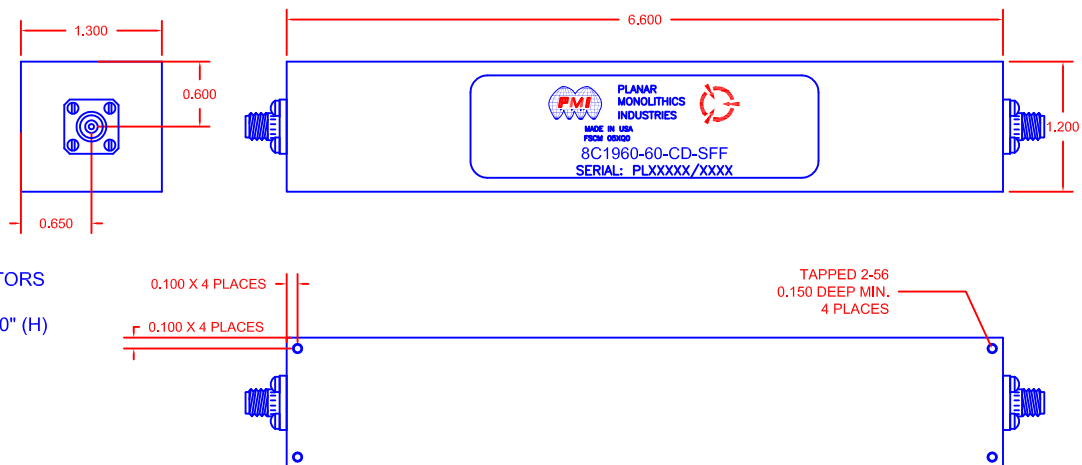

PART NO. 155-1602		 PLANAR MONOLITHICS INDUSTRIES 7311-F GROVE RD FREDERICK, MARYLAND		
APPROVALS	DATE	TITLE		
DRAWN S. PALACIO	1/21/08	OUTLINE DRAWING 8C1960-60-CD-SFF		
CHECKED				
ISSUED		SIZE A	FSCM NO. 1QJW0	DWG NO. 155-1602
		SCALE N/A	SHEET 1 OF 1	

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION