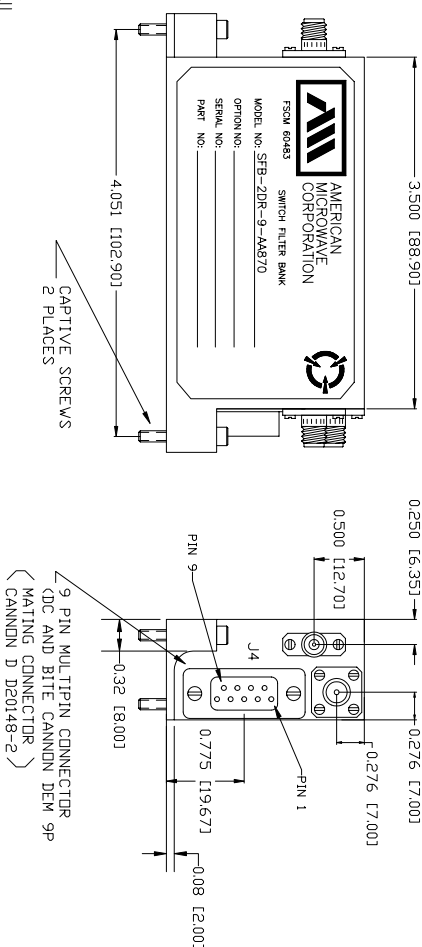

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	—	ORIGINAL RELEASE	8/20/99	

-

REJECTION	
Rejection -70dB	Rejection -45dB (F ₀ + 450)
0.5 to 6 GHz	9.2 GHz
0.5 to 6 GHz	9.7 GHz

-



- | PIN | PIN OUT TABLE J4 |
|-----|------------------------|
| 1 | N/C |
| 2 | N/C |
| 3 | -12v |
| 4 | -12v RETURN |
| 5 | +5v |
| 6 | +5v RETURN |
| 7 | N/C |
| 8 | B.I.T.E. Output |
| 9 | B.I.T.E. Output Return |

FAILURE BITE	
	OUTPUTS
OPERATIONAL	0
FAILURE	1

- | | | | |
|---|----------|---|-----|
|  | | AMERICAN MICROWAVE CORPORATION
FREDERICK, MARYLAND | |
| TITLE | | | |
| PRODUCT FEATURE
SFB-2DR-9-AA870 | | | |
| SIZE | FSCM NO. | DWG NO. | REV |
| A | 60483 | 100-5006 | - |

SCALE N/A SHEET 1 OF 2