
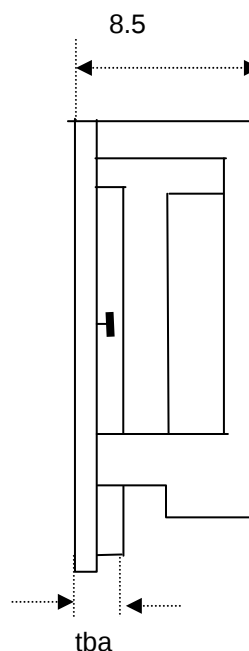


Microstrip, Circulator, 4-8GHz RADC-4-8-MS-1WR

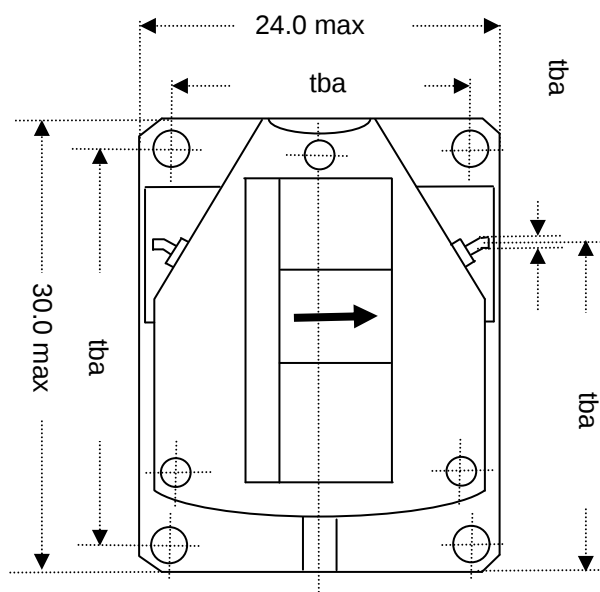

Units: mm
Not to scale

Direction of RF:	
R	Default
L	

Order Examples: RAD**C**-4-8-MS-1WR
C=CIRCULATOR

Tolerance Table Metric (inch) (unless otherwise stated):

Hole diameter +/- 0.1mm, (+/- 0.004")
Dimensions (w*h) +/- 0.3 mm, (+/- 0.015")
Dimensions (Microstrip pad, Stripline Tab, +/- 0.1mm, (+/- 0.04")
Dimensions (hole position) +/- 0.1mm, (+/- 0.04")
Machined surfaces
Flatness 0.025/mm, (0.001/ inch)
Bend radius 0.8mm, (0.031" or 1/32")

Specifications:

Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR	Avg Power Watts	Temp °C
4-8	0.7 0.8	16 15	1.40:1 1.50:1	1	room -10 to +60

RADC-4-8-MS-1WR-b

Specifications may be subject to change

06/13/14

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Tel: (408) 266-7404

FAX: (408) 266-4483

WEB: www.raditek.com

E-mail: sales@raditek.com