


Microstrip Isolator, 6.75-7.45GHz MS package, 1Watt Reverse/ 1Watt Forward Power

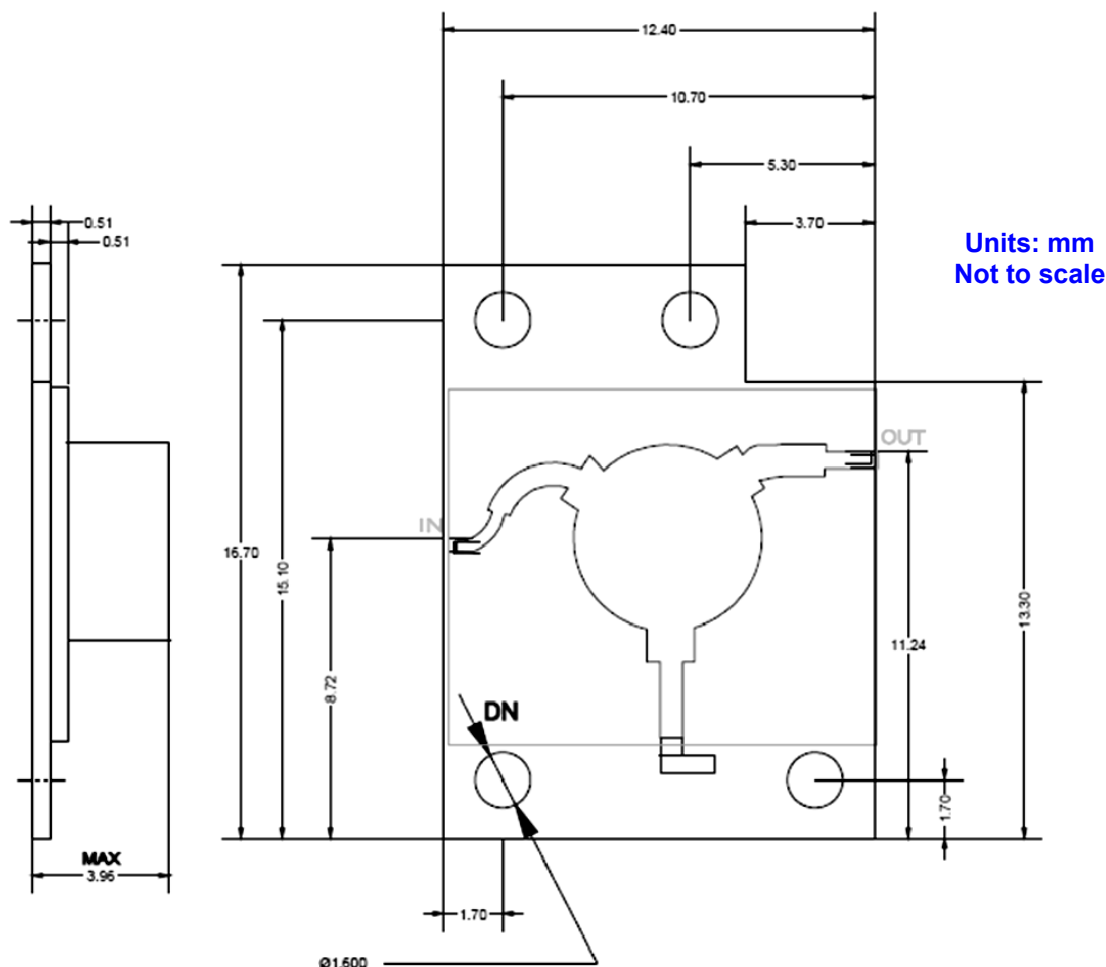

Direction of RF:	
R	Default
L	

Order Examples: **RADI-6.75-7.45-MS-1WR-b**
I=ISOLATOR

Specifications:

Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	Return loss dB (min)	VSWR	Reverse Power Watt	Forward Power Watt	Operating Temp °C
6.75-7.45	0.8	20	17	1.30:1	1	1	-20 to +75

RADI-6.75-7.45-MS-1WR-b

Specifications may be subject to change

01/14/15

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Tel: (408) 266-7404

FAX: (408) 266-4483

WEB: www.raditek.com

E-mail: sales@raditek.com