



Microstrip, Circulator, 325-355 MHz, Full Band 10 Watts Average Power / 100 Watts Peak Power

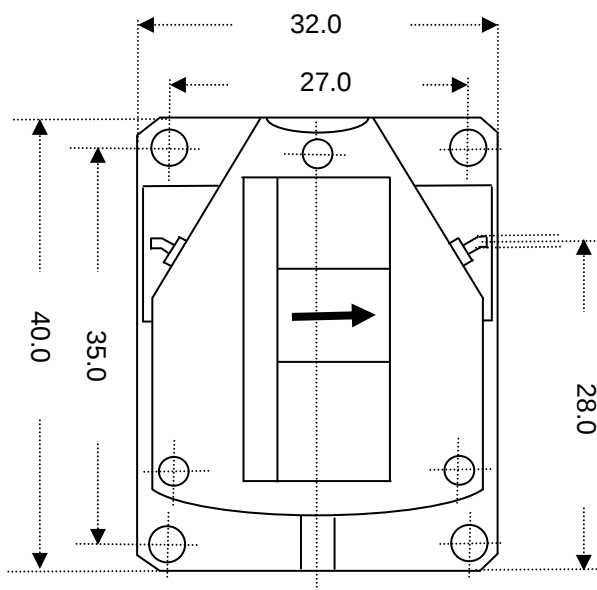

Units: mm
Not to scale

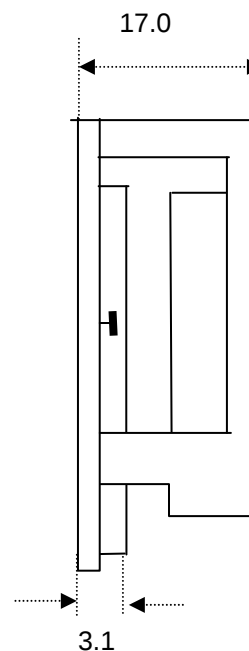

Direction of RF:	
R	Default
L	

Order Examples: RAD**C**-325-355M-MS-10W**R**
C=CIRCULATOR

Specifications:

Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR	Avg Power Watts	Peak Power Watts	Temp °C
325-355	0.8 1.0	18 16	1.3:1 1.4:1	10	100	room 0 to +60

Tolerance Table Metric (inch) (unless otherwise stated):

Hole diameter +/- 0.1mm, (+/- 0.004")
Dimensions (w*h) +/- 0.3 mm, (+/- 0.015")
Dimensions (Microstrip pad, Stripline Tab, +/- 0.1mm, (+/- 0.04")
Dimensions (hole position) +/- 0.1mm, (+/- 0.04")
Machined surfaces
Flatness 0.025/mm, (0.001/ inch)
Bend radius 0.8mm, (0.031" or 1/32")