

RDKF Isolators / RDKC Circulators

4 Hole models: Microstrip isolators and circulators (1.7 to 16.0 GHz)


-recommend RADC MS51 series over 6GHz

The RDKF(C) series of isolators and circulators are designed to meet all of your Microstrip requirements. They can be optimized to your exact frequency needs. Standard dimensions include drop-in replacements for FDK and TDK (for example).

All thin film isolator circuits are gold on copper, suitable for soldering (very easy with regular solder, (silver solder preferred), or gold thermo-compression bonding




General specifications:							
Model foot print	Frequency (GHz)	% bw max	Fwd Power max	Available loads. Watts	Pad height mm	Height Mm max	Pad width mm
-80	1.7-3.0	25	15	0.25,1,2,10	2.2	6.0	* See page 10
-78	2.8-3.7		10	5		6.0	* See page 10
-70/ 71	3.0- 6	17	10/25	0.25,1,2,10,15,20	2.2	6.0	1.0/0.8
-68	3.7-12		20	0.2W	2.2	6.5	
-65	3.7 - 5.8	14	25	20,25	1.85	6.0	
-64	9.1-9.5	10	30	30	2.2	6.1	
-63	9.5-10.5	10	25	20	1.635	5.5	
-61	4 - 9	18	20/50	0.25,2,8,10,15, 20	1.85 (2.45)	5.5	0.43
-43	9.0-16.0	10	15/25/30	1,2,10,12, 15, 20*	1.65	5.65	0.43
-49	14.0-14.5	10	12	2, 10, 12 Max	1.50	4.6	

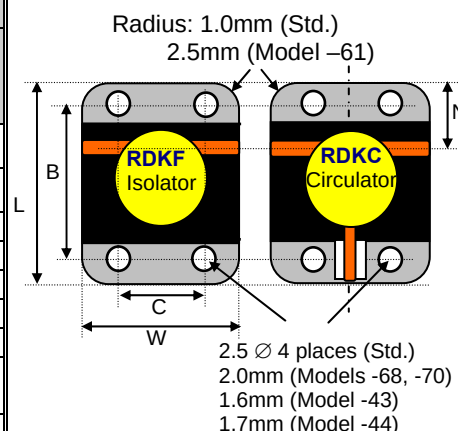

-43 20W load sticks out 0.5mm at the base of the unit
Ensure carrier temperature does not exceed 100C, Assumes infinite heat sink
Load temp to be kept < 100°C Units over 20W must be mounted on a good heat sink
Heat sink temperature must not exceed the maximum operating temperature specified

Operating Temp.	-40 to +70°C
Storage Temp.	-40 to +85°C

Direction of RF:	
R	Default →
L	←



Dimensions (Units: mm)					
	W	L	B	C	N
-80	20	30	25	15	6.5*
-78	15	28	23	10	9
-71	15	25	20	10	8
-70	15	25	20	10	9
-68	15	20	16	11	7.2
-65	12.7	24	19	7.7	9
64b	12.7	24	19.7	7.7	6.5
-63	9	19	14	6	7.5
-61	12.0	20	15	7	6.5
-43	10.2	17	14	7.4	7.0
-49	7.1	13.2	10.4	4.3	4.84

Tolerance (w*I*h) + 0/- 0.04 mm,
pad position) +/- 0.1mm
+/- 0.1 Holes/ slot centers

Specification may be subject to change
Do not heat above 130°C

Humidity 5-95% non-condensing

Max temperature during welding +350°C for 25msec

Extended Temperature range

At 80 °C, add 0.1 dB to Insertion Loss,
and subtract 1.0 dB from Isolation
At 90C °C, add 0.3 dB to Insertion Loss,
and subtract 4.0 dB from Isolation
At 100C °C, add 0.4 dB to Insertion Loss,
and subtract 5.0 dB from Isolation

Higher temperature parts with better spec available

Ordering information: example RDKF-3.7-4.2-70-1WR (Isolator)
Use part # in format as: RDKF-F_L-F_H-Model-Power_{rev} Direction
F_L-Lower frequency-F_H Higher frequency, Model (70/61 etc),
Reverse (load) Power (ie 1Watt) Power direction {R= Clockwise, or left to right
(default) or L= Counter clockwise.-}Option

RDKF RDKC 4-Hole

Specifications may be subject to change

07/09/15

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Tel: (408) 266-7404

FAX: (408) 266-4483

WEB: www.raditek.com

E-mail: sales@raditek.com

RDKF Isolators / RDKC Circulators

4 Hole models: Microstrip isolators and circulators (1.7 to 16.0 GHz)

-recommend RADC MS51 series over 6GHz

Model foot print	Freq. GHz	Insert Loss dB	Isol. dB	VSWR	Pad width mm	Code	Comments
-80	1.7-1.9	0.5 0.7	20 18	1.25:1 1.30:1		b	room 0 to +60, 10W
-80	1.7-2.1	0.8 1.1	18 15	1.35:1 1.55:1		b	room -10 to +60, 1W
-80	1.7-2.1	0.6 0.8	18 16	1.30:1 1.40:1		b	room -10 to +50, 10W
-80 (C)	1.745-1.870	0.5	20	1.25:1		b	10W
-80	1.8-2.0	0.5 0.7	20 17	1.25:1 1.30:1		b	room 0 to +60, 2Watt
-80	1.9-2.1	0.5 0.7	20 18	1.25:1 1.30:1		b	room 0 to +60, 10W
-80	1.9-2.4	0.6	17	1.30:1	0.7	e	-30°C +70°C
-80	1.9-2.4	0.6	19	1.25:1		b	1W or 10W
-80	1.9-2.6	0.6	17	1.30:1	0.7	e	500M Bw,-30 to +70
-80	1.9-2.6	0.6 0.8	18 16	1.30:1 1.40:1		b	room 0 to +60
-80	1.9-2.6	0.6 0.7	18 17	1.30:1 1.40:1		b 2/24/11	room -30 to +60 °C
-80 (C)	1.920-2.170	0.5	20	1.25:1		b	10W
-80	2.0-2.4	0.6 0.8	19 17	1.25:1 1.35:1		b	room, -10 to+60, 1W
-80	2.0-2.5	0.6	17	1.30:1	0.7		-30°C +70°C
-80 (I or C)	2.0-2.5	0.6	18	1.30:1		b	0 to +50 °C, 2W or 10W
-80	2.1-2.3	0.5	19	1.30:1	0.7	p	-30°C +70°C
-80 (I)	2.1-2.35	0.5 0.6	20 18	1.25:1 1.30:1		b	room 0 to +50 °C, 10W
-80	2.1-2.4	0.5	19	1.30:1	0.7	p	-30°C +70°C
-80 (I)	2.1-2.4	0.5 0.7	20 18	1.25:1 1.30:1		b	room 0 to +50 °C, 10W
-80	2.2-2.3	0.4	20	1.28:1	0.7	p	-30°C +70°C
-80	2.2-2.35	0.4	20	1.25:1	0.7	e	-30°C +65°C
-80	2.2-2.7	0.6 0.7	17 16	1.35:1 1.40:1		b 11/13/11	room -10 to +60 °C
-80	2.35-2.45	0.4	21	1.25:1	0.7	p	-30°C +70°C
-80	2.3-2.5	0.4	20	1.28:1	0.7	e	-30°C +70°C
-80	2.3-2.5	0.5 0.6	20 18	1.25:1 1.30:1		b 2/24/11	room -30 to +60 °C
-80	2.3-2.7	0.5 0.6	20 18	1.25:1 1.30:1		b	room -10 to +50
-80 (C)	2.3-2.7	0.5 0.7	20 18	1.25:1 1.30:1		b	room 0 to +50 °C
-80	2.3-2.7	0.5	20	1.28:1	0.7	e	-30°C +70°C
-80	2.35-2.65	0.4	22	1.25:1	0.7		-30°C +70°C
-80	2.4-2.5	0.4	22	1.25:1	0.7	e	-30°C +70°C
-80 (C)	2.4-2.5	0.4 0.5	20 18	1.25:1 1.30:1		b	room -10 to +50, 2-20Watt

RDKF Isolators / RDKC Circulators

4 Hole models: Microstrip isolators and circulators (1.7 to 16.0 GHz)

-recommend RADC MS51 series over 6GHz

Model foot print	Freq. GHz	Insert Loss dB	Isol. dB	VSWR	Pad width mm	Code	Comments
-80	2.4-2.52	0.4	20	1.25:1	0.7	e	-30°C +65°C
-80	2.4-2.7	0.5	20	1.22:1	0.7	p	
-80	2.4-2.8	0.5	20	1.22:1	0.7	e	-30°C +70°C
-80 (I)	2.45-2.95	0.6 0.8	18 16	1.30:1 1.40:1		b	room -10 to +50 °C
-80 (I)	2.5-2.7	0.5 0.6	20 18	1.25:1 1.30:1		b	room -10 to +60 °C, 1W, b
-80 (I & C)	2.5-2.7	0.5	20	1.25:1		b	10W
-80	2.5-3.5 (500MHz BW)	0.6 0.8	18 17	1.30:1 1.40:1		b	room 0 to +50 °C
-80	2.7-2.9	0.4	20	1.20:1	0.7	e	-30°C +70°C
-80 (C)	2.7-3.0	0.5 0.7	19 18	1.25:1 1.30:1		b	room -10 to +60 °C, 10W
-80 (I)	2.7-3.0	0.5 0.7	20 18	1.25:1 1.30:1		b	room -10 to +60 °C, 10W
-78 (I)	2.9-3.7 (800MHz BW)	0.6	18	1.30		b	0 to +50 °C, 1W Rev, 1W Fwd
-71	2.9-3.1	0.5	20	1.3:1	0.8	b	special
-71	4.0-4.4	0.5	20	1.25:1	0.8	b	
-70	2.8-3.5	0.6	18	1.30:1			20W, b
-70	2.9-3.1	0.5	20	1.25:1	0.8	p	
-70	3.0-3.2	0.5 0.7	20 18	1.25:1 1.30:1		b	+25 -10 to +50 °C, 1W
-70	3.0-3.3	0.6	18	1.25:1	0.8		
-70	3.0-4.2	0.6	18	1.30:1	0.8		
-70	3.05-3.5	0.6	18	1.30:1	0.8	p	
-70	3.05-3.55	0.6	18	1.30:1	0.8	p	
-70	3.1-3.3	0.5	20	1.20:1	0.8		
-70	3.1-3.4	0.5	20	1.20:1	0.8		
-70	3.1-3.6	0.6	18	1.30:1		b	
-70	3.1-3.6	0.5	18	1.35:1		b	-30 to +70 °C
-70	3.1-3.6	0.6	18	1.25:1	0.8	e	
-70	3.16-3.24	0.4	21	1.20:1		p	20W Rev/ 25W Fwd
-70	3.2-3.4	0.5	20	1.20:1		p	
-70	3.25-3.95	0.6	18	1.30:1		b	3W
-70	3.3-3.5	0.4	20	1.25:1		e	-30°C +65°C
-70 (I)	3.4-3.6	0.4 0.5	20 18	1.25:1 1.30:1		b	room -10 to +60 °C, 1W, b
-70	3.4-3.6	0.5	20	1.20:1			
-70	3.4-3.9	0.5	20	1.20:1			
-70	3.3-4.1	0.6	18	1.30:1		b	
-70	3.4-4.2	0.5	20	1.25:1		e	
-70	3.5-4.5	0.5	20	1.20:1		b	
-70	3.6-3.8	0.4	21	1.20:1			tbc

RDKF Isolators / RDKC Circulators

4 Hole models: Microstrip isolators and circulators (1.7 to 16.0 GHz)

-recommend RADC MS51 series over 6GHz

Model foot print	Freq. GHz	Insert Loss dB	Isol. dB	VSWR	Pad width mm	Code	Comments
-70	3.6-4.2	0.5	20	1.25:1			
-70	3.6-4.4	0.6	20	1.30:1		b	
-70	3.7-4.2	0.4 0.5	20 18	1.25:1 1.30:1		b	+25 -10 to + 70°C, 15W
-70	3.75-4.25	0.5	20	1.20:1			
-70	3.8-4.2	0.5	20	1.20:1		b	
-70	3.8-4.2	0.5	20	1.25:1		b	
-70	3.8-4.6	0.5 0.6	20 18	1.25:1 1.30:1		b	room -10 to+70 °C, 6W/ 10W Rev, 25W Fwd
-70z	3.8-4.6	0.6	20	1.30:1		p	special marking on substrate "Raditek" "89I-1372P002"
-70	3.9-4.2	0.5	20	1.25:1		p	
-70	3.9-4.5	0.6	18	1.30:1		p	
-70	4.0-4.5	0.55	19	1.28:1			
-70	4.0-5.0	0.6	18	1.30:1		b	
-70	4.1-5.0	0.6	18	1.30:1		b	
-70	4.2-4.4	0.5	20	1.20:1			
-70	4.3-5.0	0.4	20	1.20:1		p	
-70	4.3-5.1	0.4	20	1.20:1			
-70	4.40-4.45	0.4	21	1.20:1		p	
-70	4.4-4.8	0.5	20	1.25:1			
-70	4.4-5.0	0.5	20	1.22:1		b	
-70	4.4-5.1	0.6	19	1.25:1		p	
-70	4.67-4.9	0.4	21	1.20:1		p	
-70	4.85-4.95	0.4	20	1.20:1		e	
-70	4.8-5.6	0.4	20	1.20:1		p	
-70	4.8-5.8	0.4	20	1.20:1		p	
-70	4.9-5.7	0.4	20	1.20:1			
-70	4.9-5.9	0.4	18	1.25:1			
-70	4.9-5.9	0.5 0.6	20 18	1.25:1 1.30:1		b	+25 -10 to + 60°C, 30W - Circulator
-70	5.0-5.3	0.4	18	1.25:1		b	
-70	5.0-5.9	0.6	18	1.30:1		b	
-70	5.0-6.0	0.5	20	1.25:1		b	1W
-70	5.1-6.1	0.5	18	1.35:1		b	9-20-06
-70	5.25-5.85	0.5	18	1.35:1		p	9-20-06
-70	5.3-5.9	0.5	18	1.35:1		p	
-70	5.5-6.4	0.5	18	1.30:1		p	
-70	5.60-5.65	0.4	18	1.25:1		p	
-70	5.7-5.9	0.5	18	1.35:1		p	
-70	5.8-6.7	0.5	18	1.30:1		b	10W Rev /50W Fw, 60W 300W peak
-68	2.95-3.45	0.6 0.8	19 17	1.30:1 1.35:1	Size -68 15x20x5.5	b	room -15 to +55C, 2W Rev/ 2W Fwd
-68	3.7-4.1	0.4	20	1.20:1			
-68	3.7-4.2	0.5	20	1.30:1		b	
-68	7-11	0.8	17	1.40:1		b	

RDKF Isolators / RDKC Circulators

4 Hole models: Microstrip isolators and circulators (1.7 to 16.0 GHz)

-recommend RADC MS51 series over 6GHz

Model foot print	Freq. GHz	Insert Loss dB	Isol. dB	VSWR	Pad width mm	Code	Comments
-68	7.0-12.0	0.7 0.8	16 15	1.40:1 1.50:1		b 11/13/11	room -30 to +70C, 1W Rev/ 1W Fwd
-68	8.0-12.0	0.4	20	1.20:1			10W Fwd/2W Rev
-65	4.0-4.5	0.5	19	1.25:1		p	
-65	4.4-4.6	0.4	22	1.25:1		b	
-65	4.4-5.1	0.5	20	1.22:1			
-65	4.4-5.0	0.5	20	1.22:1			
-65	5.2-5.9	0.5 0.7	20 17	1.25:1 1.35:1		b	+25 to +35C -40 to +75C, 2W
-65	5.3-5.6	0.4	20	1.25:1		b	
-65	5.8-6.5	0.5	20	1.25:1		b	-40 to +80
-65	8-12	0.7 1.0	20 17	1.25:1 1.40:1		b	room -55 to +85, 1 or 12WR/ 10W Fwd
-64	5.2-5.9	0.5	19	1.25:1		b	-20 to 70C
-64	9.1-9.3	0.5	20	1.22:1		e	
-63	9.1-9.3	0.6	18	1.25:1		e	25W Fwd/ 20WRev, -40 to +70C
-63	9.5-10.5	0.6	19	1.30:1		e	-30 to 60C
-61	4.35-4.65	0.4	20	1.25:1		e/b	
-61	4.39-5.01	0.5	18	1.25:1		p	Pad Height 2.45
-61	4.4-4.6	0.45	21	1.20:1			
-61	4.4-4.7	0.45	21	1.20:1		p	
-61	4.4-5.0	0.5	20	1.22:1	0.43	e	
-61	4.4-5.0	0.5 0.6	20 18	1.25:1 1.30:1		b	room -30 to +60 °C
-61	4.4-5.5	0.5	20	1.25:1		b	
-61	4.4-5.5	0.5	18	1.25:1		e	
-61	4.8-5.5	0.5 0.6 0.7	20 18 17	1.25:1 1.30:1 1.35:1		b	room -30 to +50 °C -30 to +85, 10W Circ
-61	4.85-5.05	0.5	20	1.25:1			
-61	4.9-5.0	0.5	20	1.25:1			
-61	4.9-5.2	0.5	20	1.25:1			
-61	4.9-5.8	0.5	20	1.25:1		b	
-61	4.9-5.9	0.4 0.9	20 16	1.25:1 1.40:1		b	Room -45 to +85
-61	4.9-5.9	0.5 0.7	20 17	1.25:1 1.35:1		b	20WR/100W Pk room -10 to +60, to be mounted on heatsink, 20W Rev, 20W Fwd, 20W PK
-61 (I/C)	4.9-5.9	0.4 0.6	20 17	1.25:1 1.35:1		b	room -40 to +85°C, 2W CW max.
-61	5.0-5.3	0.6	18	1.35:1		p	
-61	5.0-5.3 (I & C)	0.6	15	1.50:1		b	-55 to +85°C, 5Watt Average forward power, 10Watt Peak
-61	5.0-5.7	0.6	18	1.35:1		P	
-61	5.0-5.9	0.6	18	1.35:1		P	
-61	5.0-6.0 (C)	0.5	19	1.25:1		b	+25

RDKF Isolators / RDKC Circulators

4 Hole models: Microstrip isolators and circulators (1.7 to 16.0 GHz)

-recommend RADC MS51 series over 6GHz

Model foot print	Freq. GHz	Insert Loss dB	Isol. dB	VSWR	Pad width mm	Code	Comments
		0.6	18	1.30:1			-10 to 70C, wide band -b
-61	5.0-6.0	0.5 0.6	20 18	1.25:1 1.30:1		b 2/24/11	room -30 to +70
-61	5.5-6.4	0.5 0.6	20 18	1.25:1 1.30:1		b 02/11/13	room -10 to +60 1watt
-61	5.0-6.5	0.6	18	1.35:1		P	
-61	5.0-7.0	0.6	18	1.30:1		e	-20 to 70C
-61	5.0-7.0	0.7	18	1.35:1		B	
-61	5.0-7.2	0.7	18	1.35:1		p	
-61	5.8-6.4	0.4 0.5	20 18	1.25:1 1.30:1		b	room -10 to +70°C, 2W
-61	5-9 (C) (15% BW)	0.5 0.6	20 16	1.24:1 1.30:1		b	room -10 to +60
-61	5.1-5.3	0.5	20	1.25:1		e	-30 to 60C
-61	5.15-5.35	0.5	20	1.25:1		p	
-61	5.1-5.6	0.4	20	1.25:1		e 2-5-05	0 to 50C
-61	5.1-5.8	0.5	20	1.20:1			
-61	5.1-5.9	0.5	18	1.30:1		b	3WR/ 30W Fwd
-61	5.1-6.1	0.6	18	1.30:1		e	-20 to 70C
-61	5.2-5.4	0.5	20	1.25:1		b	0 to +50C, 5W/ 10W
-61	5.2-5.5	0.3	20	1.20:1		e	-20 to 60 p
-61	5.2-5.6	0.5	20	1.25:1			
-61	5.2-5.9	0.5	20	1.25:1		b	
-61	5.2-5.9	0.5	20	1.25:1		e 2-8-05	-40 to 70C
-61	5.2-5.9	0.5 0.7	20 17	1.25:1 1.35:1		b	room -40 to +70, to be mounted on heatsink, 20W Rev, 20W Fwd, 20W PK
-61	5.2-6.2	0.6	18	1.30:1		Full temp	-20 to 70C e
-61	5.2-6.2	0.6	18	1.30:1		b	
-61	5.3-5.6	0.5	20	1.20:1			
-61	5.3-5.9	0.5	20	1.20:1		p	-30 to 70C
-61	5.4-5.7	0.5	20	1.20:1			
-61 (C)	5.4-5.9	0.4	20	1.25:1		b	-10 to +60
-61 (C)	5.4-5.9	0.4 0.6	20 18	1.25:1 1.30:1		b	room -40 to +80C 25W Peak, 150us pulse width, 25% duty cycle
-61 (C)	5.4-5.9	0.5 0.6	20 18	1.25:1 1.30:1		b	room -10 to +60C 8W average, 80W Peak in 10% duty cycle, b
-61	5.4-6.2	0.5 0.7	20 18	1.25:1 1.35:1		b	+25 -15 to +55C, 0.5W CW
-61	5.47-5.73	0.5	20	1.20:1			
-61	5.47-5.725	0.5	20	1.20:1			
-61	5.6-6.0	0.5	20	1.20:1		p	
-61	5.6-6.0	0.4 0.5	20 18	1.20:1 1.30:1		b	Room -30 to 70C
-61	5.6-7.4	0.8	18	1.35:1		p	

RDKF Isolators / RDKC Circulators

4 Hole models: Microstrip isolators and circulators (1.7 to 16.0 GHz)

-recommend RADC MS51 series over 6GHz

Model foot print	Freq. GHz	Insert Loss dB	Isol. dB	VSWR	Pad width mm	Code	Comments
-61	5.8-7.2	0.75	18	1.35:1		b	
-61	5.625-6.825	0.7	19	1.30:1		e	
-61	5.6-6.5	0.5	20	1.25:1		e	
-61	5.6-8.5	0.8	18	1.35:1		e, b	
-61	5.7-5.9	0.5	20	1.25:1		e	-30 to 60C
-61	5.7-5.9	0.4	20	1.25:1		b	Room
-61		0.5	18	1.30:1			-30 to 70C
-61	5.7-6.0	0.5	20	1.25:1		p	
-61	5.7-7.1	0.5	18	1.30:1		b	-30 to +85 °C, 0.5/20/1.3 @ RT 0.6/18/1.35 @ -10 to 70C
-61	5.7-7.1	0.5	20	1.25:1		e	CM
-61	5.8-6.4	0.5	20	1.25:1			
-61	5.8-6.5	0.5	20	1.25:1		b	+25
-61		0.6	18	1.30:1			-30 to +60C
-61	5.8-6.6	0.5	20	1.25:1		p	
-61	5.8-6.7	0.6	18	1.30:1		b	10W/50Wfrd
-61	5.8-7.1	0.4	20	1.25:1		b	-10 to +50 °C
-61		0.5	18	1.30:1			-40 to +70 °C, 20W, b
-61	5.8-7.2	0.5	20	1.30:1		b	+25
-61		0.7	16	1.40:1			-30 to +85 °C, 8W, b
-61	5.8-7.2	0.4	20	1.25:1		b	+25
-61		0.5	18	1.30:1			-30 to +70 °C, 2W, b
-61	5.8-7.2	0.6	20	1.30:1	-30 to +85 °C	e	0.4/21/1.2 @ -10 to +60 °C
-61	5.8-8.5	0.8	18	1.35:1			
-61	5.85-6.15	0.4	20	1.25:1		e/b	
-61	5.85-6.40	0.5	18	1.30:1		b	-30 to +70, 40Watt Operating average power max, 25Watt Power in Load
-61	5.85-7.02	0.5	20	1.25:1		p	
-61	5.9-6.1	0.5	20	1.25:1			
-61	5.9-6.4	0.5	20	1.25:1		e	
-61	5.9-6.4	0.4	20	1.25:1		b	+25
-61		0.5	18	1.30:1			-10 to +60 °C, 15W
-61	5.9-6.5	0.6	18	1.30:1		e	9-30-05
-61	5.9-6.5	0.4	20	1.25:1		b	room
-61		0.5	18	1.30:1			-30 to +60, 15W to be mounted on the heatsink
-61	5.9-7.2	0.65	18	1.30:1			
-61	5.9-7.5	0.7	18	1.30:1			
-61 (I)	6.0-6.5	0.4	20	1.25:1		b	room
-61 (I)		0.7	17	1.35:1			-40 to +85 °C, 1W CW Rev, 10W CW Fwd
-61 (C)	6.0-6.5	0.4	20	1.25:1		b	room
-61 (C)		0.7	17	1.35:1			-40 to +85 °C, 10W CW
-61	6.0-8.0	0.7	18	1.35:1		b	
-61	6.0-8.5	0.6	18	1.30:1		b	
-61	6.3-8.0	0.5	20	1.25:1		e	-30 to +70 °C
-61WB	6.0-18.0	1.4	10	1.90:1		b	Height 5.00mm max
-61	6.1-7.3	0.5	20	1.25:1		b	

RDKF Isolators / RDKC Circulators

4 Hole models: Microstrip isolators and circulators (1.7 to 16.0 GHz)

-recommend RADC MS51 series over 6GHz

Model foot print	Freq. GHz	Insert Loss dB	Isol. dB	VSWR	Pad width mm	Code	Comments
-61	6.2-7.4	0.4	20	1.25:1		b	
-61	6.3-6.5	0.5	20	1.25:1		p	
-61	6.4-6.5	0.4	20	1.25:1		P	
-61	6.4-7.1	0.5	20	1.25:1		P	
-61	6.425-7.125	0.5	20	1.25:1		P	
-61	6.4-7.2	0.5	20	1.25:1			
-61	6.4-7.2	0.4 0.5	20 18	1.25:1 1.30:1		b	+25 -10 to +60 °C, 15W
-61	6.4-7.4	0.6	19	1.30:1		p	
-61	6.4-7.6	0.7	18	1.35:1		p	
-61	6.5-6.9	0.4 0.5	20 18	1.25:1 1.30:1		b	room -30 to +60, 15W to be mounted on the heatsink
-61	6.6-6.8	0.4	20	1.25:1		e	-30°C +65°C
-61	6.6-7.2	0.4 0.5	20 18	1.25:1 1.30:1		b	room -10 to +70°C, 2W
-61	6.6-7.8	0.7	18	1.35:1		p	
-61	6.7-7.15	0.5	20	1.25:1		p	
-61	6.7-7.2	0.5	20	1.25:1			
-61	6.8-7.2	0.5	20	1.25:1			
-61	6.9-7.8	0.7	18	1.35:1		p	
-61	6.9-8.1	0.6	19	1.30:1		p	
-61 (C)	7.0-8.5	0.5	18	1.30:1		b	-10 to +50,10W, b
-61	7.0-9.0	0.7	18	1.30:1		b	
-61	7.0-10.0	0.6 0.8	17 15	1.35:1 1.50:1		b 11/13/11	room -30 to +70C
-61	7.125-7.725	0.5	20	1.25:1		e	
-61	7.1-7.7	0.5	20	1.25:1		p	
-61	7.1-7.8	0.5	20	1.25:1		e, b	-30 to 60C
-61	7.1-7.9	0.5	20	1.30:1		e	
-61	7.1-8.5	0.5	20	1.35:1		b	4W Rev/10W Fwd
-61	7.1-8.5	0.5	18	1.30:1		b	2WR/ 2W Fwd, -40 to +70C
-61	7.1-8.6	0.4	20	1.22:1			STD Low Power
-61	7.1-8.6	0.5	20	1.25:1			20W/20W hp ferrite
-61	7.2-8.5	0.45	20	1.25:1		e	
-61	7.25-7.75	0.5	20	1.25:1		p	
-61	7.4-7.8	0.4	20	1.25:1			
-61	7.4-7.8	0.4 0.5	20 18	1.25:1 1.30:1		b	room -30 to +60, 15W to be mounted on the heatsink
-61	7.7-8.5	0.45	20	1.25:1		e	
-61	7.725-8.5	0.4	20	1.22:1			
-61	7.8-8.5	0.5	20	1.25:1		p	
-61	7.8-8.7	0.5	20	1.25:1		b	
-61	7.85-8.15	0.4	20	1.25:1		e/b	
-61	7.9-8.4	0.4	20	1.25:1		b	10W Rev, 10W Fwd
-61	7.9-8.6	0.45	20	1.25:1		e	

RDKF Isolators / RDKC Circulators

4 Hole models: Microstrip isolators and circulators (1.7 to 16.0 GHz)


-recommend RADC MS51 series over 6GHz

Model foot print	Freq. GHz	Insert Loss dB	Isol. dB	VSWR	Pad width mm	Code	Comments
-61	7.9-8.5	0.45	20	1.25:1		e	
-49	13.75-14.5	0.6	20	1.30:1		b/e	12w max 4x4mm load
-49	12.75-13.25	0.5	20	1.25:1		b	-40 to 75C
-43	8.8-10.2	0.6	18	1.25:1		e	5-3-07
-43	8-12	0.5 0.6	20 18	1.25:1 1.30:1		b	+15 to +35 °C -10 to +60°C, 2W Rev, 10W Fwd.
-43	9.0-9.2	0.5	20	1.25:1		e	
-43	9.0-9.5	0.5	20	1.25:1		e	
-43	9.0-9.5	0.5	20	1.25:1		b	
-43	9.0-10.0	0.5	23	1.25:1		e	CM tbc
-43	9.0-10.5	0.5	19	1.30:1		b	15W, -10 to +50
-43	9.0-10.5	0.6	19	1.30:1		b/e	20 watts (b)
-43	9.1-9.3	0.5	20	1.25:1		b	
-43	9.3-9.5	0.5	20	1.25:1		b	
-43	9.1-9.5	0.5	20	1.25:1		b	
-43	9.1-9.5	0.5	18	1.30:1		b	-30 to +85, 20W
-43	9.2-9.6	0.5	20	1.25:1		p	
-43	9.2-9.8	0.5	20	1.25:1		p	
-43	9.5-10.5	0.5	20	1.25:1		b	25W Fwd /12W Rev , -40 to +70
-43	9.5-10.5	0.5	20	1.25:1		b	20 watts
-43	9.5-10.5	0.5	20	1.25:1		e	25W fwd /12W rev e 20w fwd/15w rev
-43	9.5-10.5	0.5	20	1.25:1		b only	30W fwd//12rev
-43	9.5-10.5 (C)	0.6	18	1.30:1		b	30W
-43	9.5-10.5	0.5	20	1.25:1		b	+25
5080	9.5-10.5	0.6	18	1.30:1		b	-50 to +80°C
-43	9.5-10.5	0.5	20	1.25:1		b	+25
55100	9.5-10.5	0.6	17	1.40:1		b	-55 to +100°C
-43	10-15	0.8 1.0	15 14	1.50:1 1.60:1		b	room -10 to +70
-43	12.5-14.0	0.5	20	1.22:1		b	15W Rev/ 15W Fwd
-43	13.75-14.50	0.5	20	1.25:1		b	-30 to +70, 25Watt Operating average power max, 15Watt Power in Load
-43	13.8-15.7	0.5	20	1.22:1		b	15W Rev/ 15W Fwd


RDKF Isolators / RDKC Circulators

4 Hole models: Microstrip isolators and circulators (1.7 to 16.0 GHz)


-recommend RADC MS51 series over 6GHz

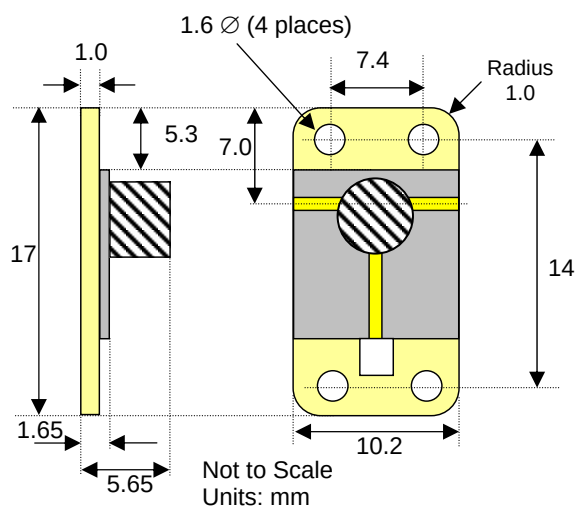


Cross section of the -43 isolator:

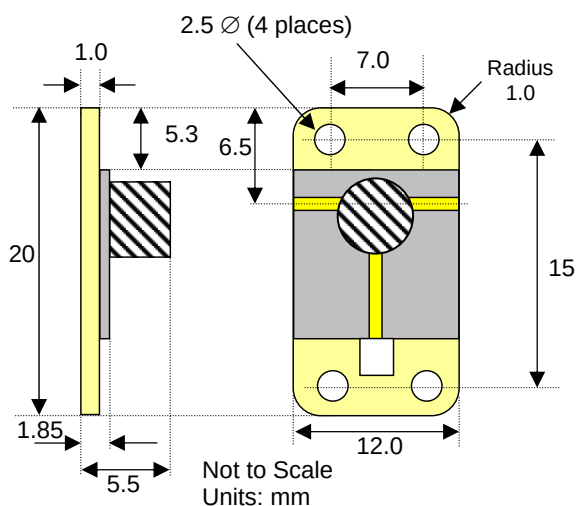

Cross section of the -61 isolator:

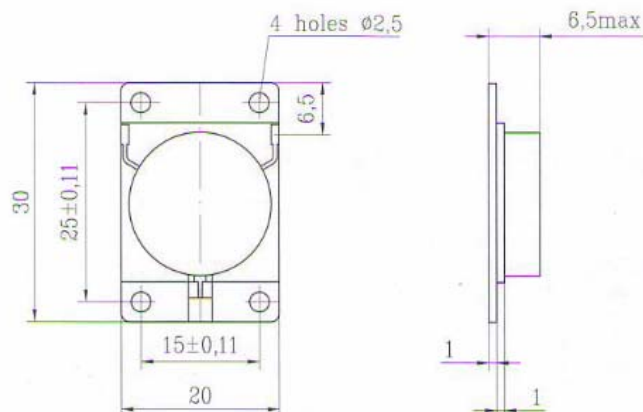

Cross section of the -80 isolator:

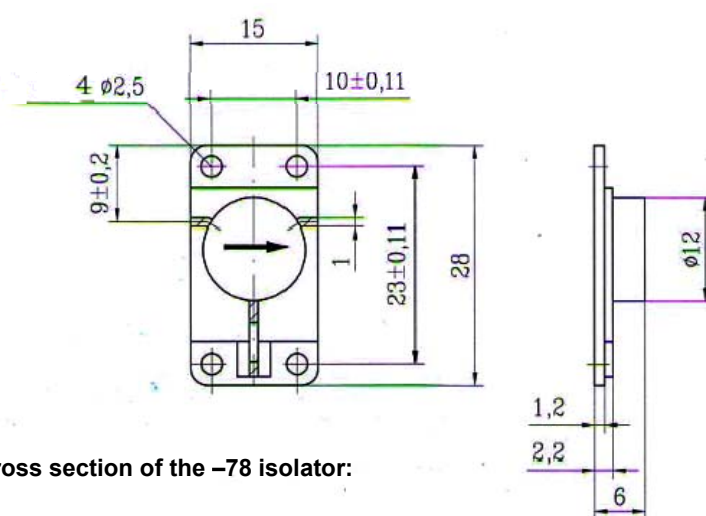

Cross section of the -78 isolator:

We have exhaustively tested the Microstrip Drop in's.

Units passed all shock and vibration test.

The units have low mass and are very robust.

- Vibration in frequency range 1-5000Hz with acceleration 400m/sec² (40g)
- repeated shocks with acceleration 1500m/sec² (150g) and duration 1-5msec
- single shock with acceleration 15000m/sec² (1500g) and duration 0.1-2msec
- linear centrifugal acceleration 5000m/sec²
- acoustic noise 50-10000Hz at sound pressure level up to 170dB
- absence of resonance in frequency range 1-100Hz