


Coupler, 80-1000MHz, 30dB Coupling N Female Connectors, 100 Watts

code-z4

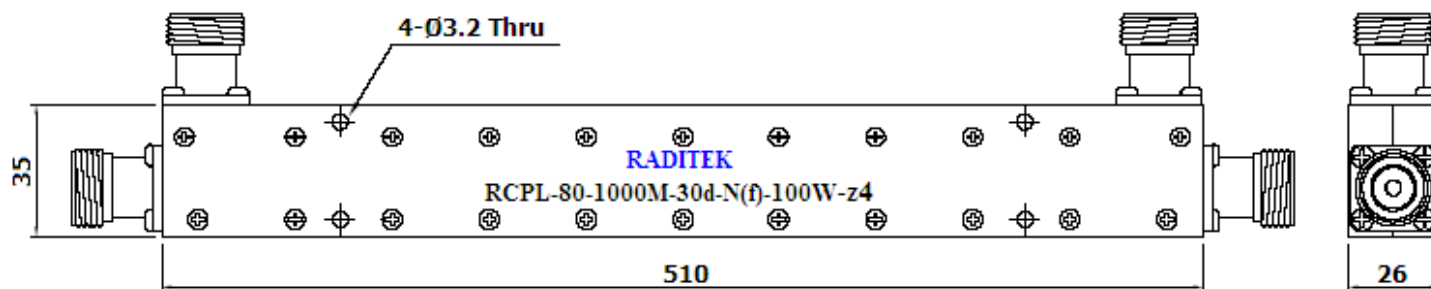

Units: mm
Not to scale

Order Examples: RCPL-80-1000M-30d-N(f)-100W

Description: (Coupler, 80-1000MHz, 30dB Coupling, N-Type Female Connectors, 100 Watts)

Specifications		Units
Frequency Range	80-1000	MHz
Insertion Loss	0.7	dB (max)
Return Loss	17.0	dB min
Coupling Value	30±2	dB max
Directivity	15.0	dB min
Coupling Flatness	±1.0	dB (max)
Power	100	Watts
Impedance	50	Ω
Connectors	N-Female	
Operating Temperature	-30 to +70	°C
Finish	Clear chemical film per MIL-C-5541, Class 3	