


Directional Coupler, 88-900MHz, N-female connectors, 100 Watts

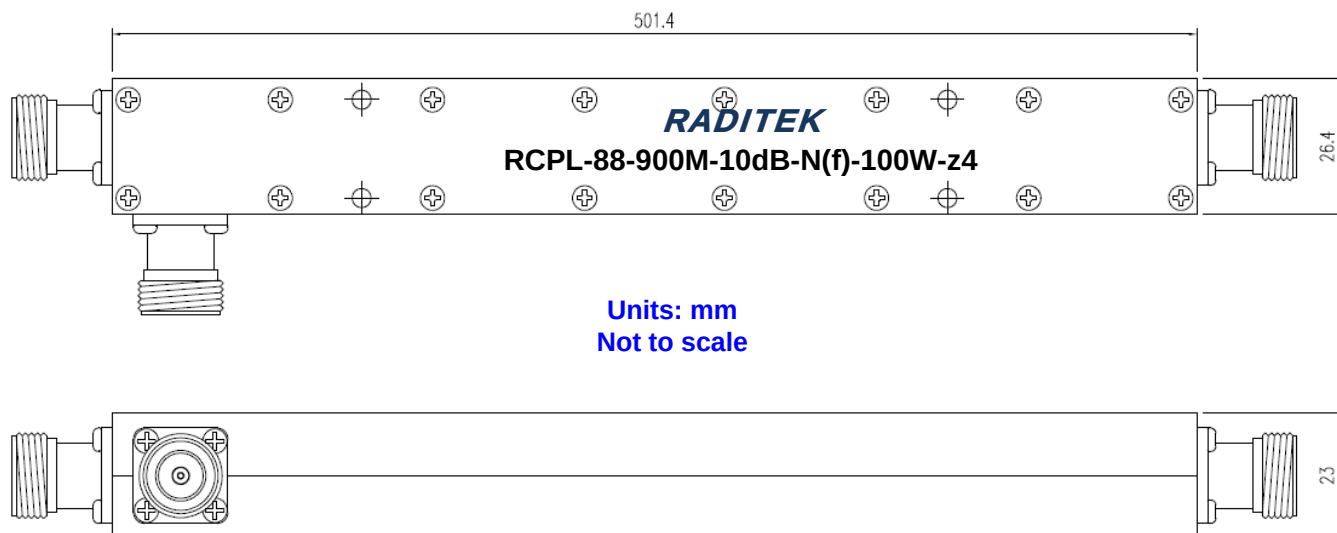

Order Examples: RCPL-88-900M-10dB-N (f)-100W-z4

Description: (Directional Coupler, 88-900MHz, N-Type Female Connectors, 100 Watts)

Specifications		Units
Frequency Range	88-900	MHz
Insertion Loss	1.0	dB (max)
VSWR	1.3:1	(max)
Coupling Value	10.0±1.2	dB (max)
Coupling Flatness	±1.2	dB (max)
Directivity	20.0	dB (min)
Power	100	Watts (max)
Impedance	50	Ohm
Connector (In – Out)	N female	
Operating Temperature	-30 to +70	°C
Finish	Clear chemical film per MIL-C-5541, Class 3	