


RADITEK INC.

COUPLER, 150-250MHz 3dB Coupling, SMA Connectors, 200 Watts

code-j

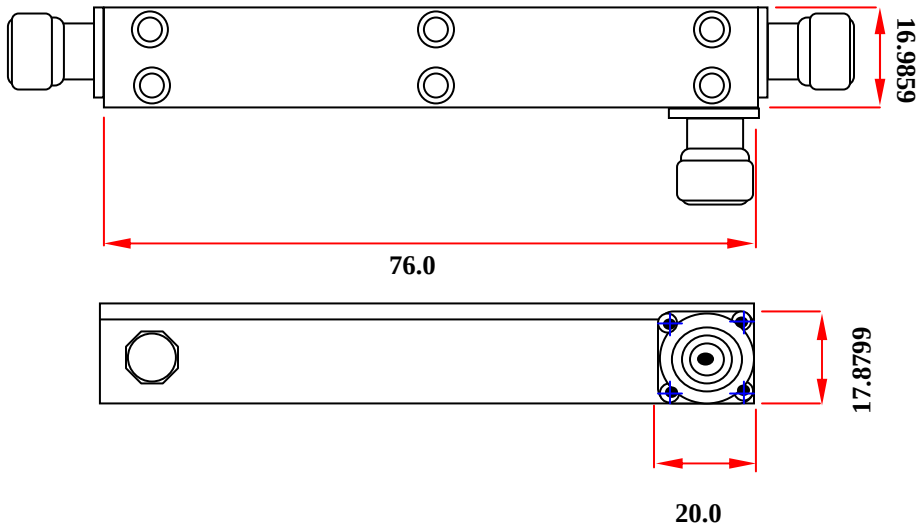

SMA Connector Options (SX)		
In	Out	Code
female	male	-1
male	female	-2
female	female	-3
male	male	-4

Units: mm
Not to scale



Order Examples: RCPL-150-250M-3d-S3-200W

Description: (Coupler, 150-250 MHz, 3 dBm Coupling, SMA Female Connectors, 200 Watts)

Specifications		
Frequency	150-250	MHz
Insertion Loss	3.3	dB
Isolation	18	dB
VSWR	1.20	:1
Coupling Value	3	dB $\pm$ 0.4
Coupling Port Connector	N-Type	(female)
Impedence	50	Ohm
Input Power	200	Watts
Temperature Range	-30 to 70	°C

RCPL-150-250M-3dB-S3-200W-j Specifications may be subject to change

03/03/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com