


Coupler, 406.0-406.1MHz, 40dB Coupling N-Type Female Connectors, 10 Watts

code-z4

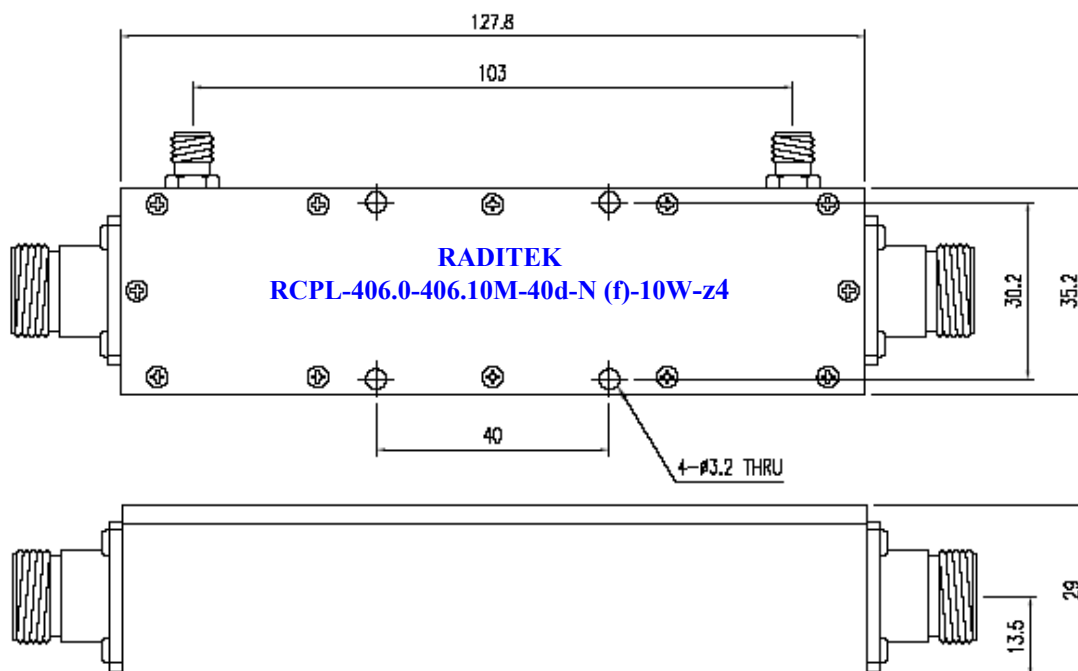

Units: mm
Not to scale

Order Examples: RCPL-406.0-406.1M-40d-N (f)-10W

Description: (Coupler, 406.0-406.1MHz, 40dB Coupling, N Female Connectors, 10 Watts)

Specifications		Units
Frequency Range		406.0-406.1
Insertion Loss		0.1
Return Loss		20.0
Coupling Value		40±1.0
Directivity		20.0
Coupling Flatness		±0.3
Power		10
Impedance		50
Connectors	In/Out	N-Female
	CPL/ISO	SMA -Female
Operating Temperature		-30 to +70
Finish		Clear chemical film per MIL-C-5541, Class 3