


Coupler, 520-2000 MHz, 10dB and 6dB Coupling SMA Female Connectors, 50 Watts

code-z4

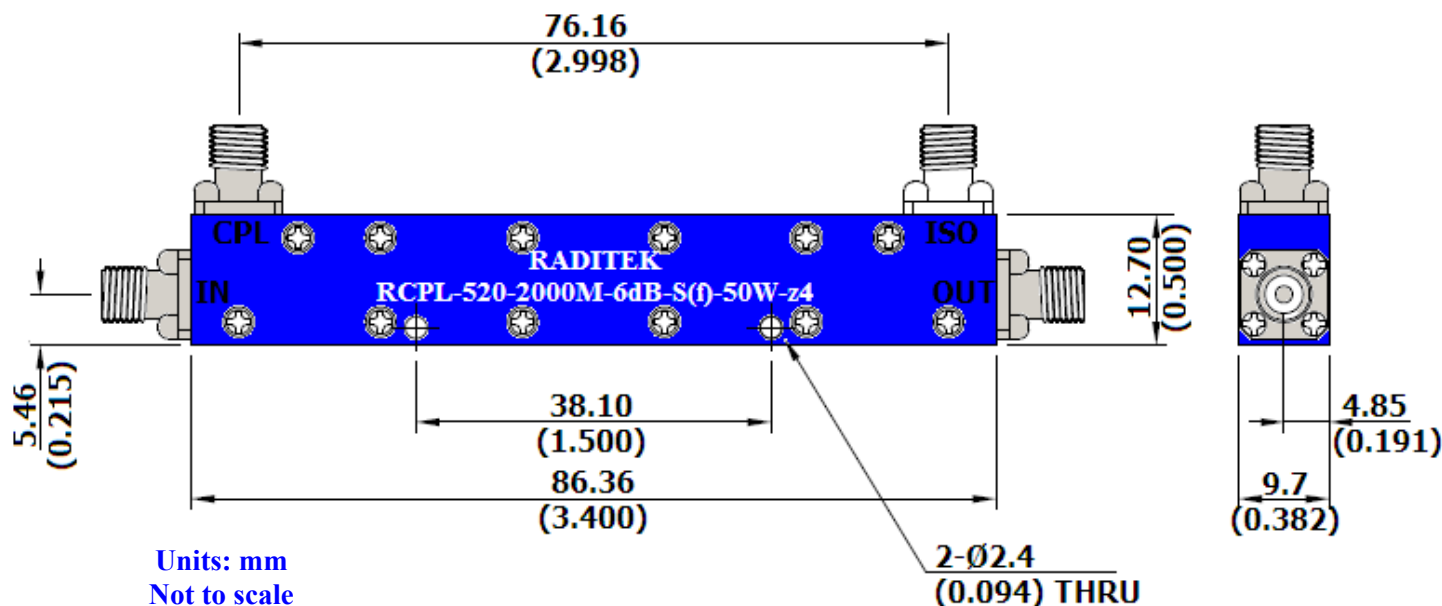

☎ Order Examples: RCPL-520-2000M-6dB-S(f)-50W

Description: (Coupler, 500-1000 MHz, 6dB Coupling, SMA Female Connectors, 50 Watts)

Specifications			Units
Frequency Range	520-2000	520-2000	MHz
Insertion Loss	1.6	0.8	dB (max)
VSWR	1.25	1.20	:1 (max)
Coupling Value	6±1.2	10±1.2	dB (max)
Coupling Flatness	±0.7	±0.8	dB (max)
Directivity	17.0	20.0	dB (min)
Power	50	50	Watts (max)
Impedance	50	50	Ω
Connector	SMA Female	SMA Female	
Temperature Range	-30 to 70	-30 to 70	°C
Finish	Clear Chemical Film per MIL-C-5541, Class 3		