


RADITEK INC.

Coupler, 750-1000 MHz 30dB Coupling, SMA Connectors, 50 Watts

code-j

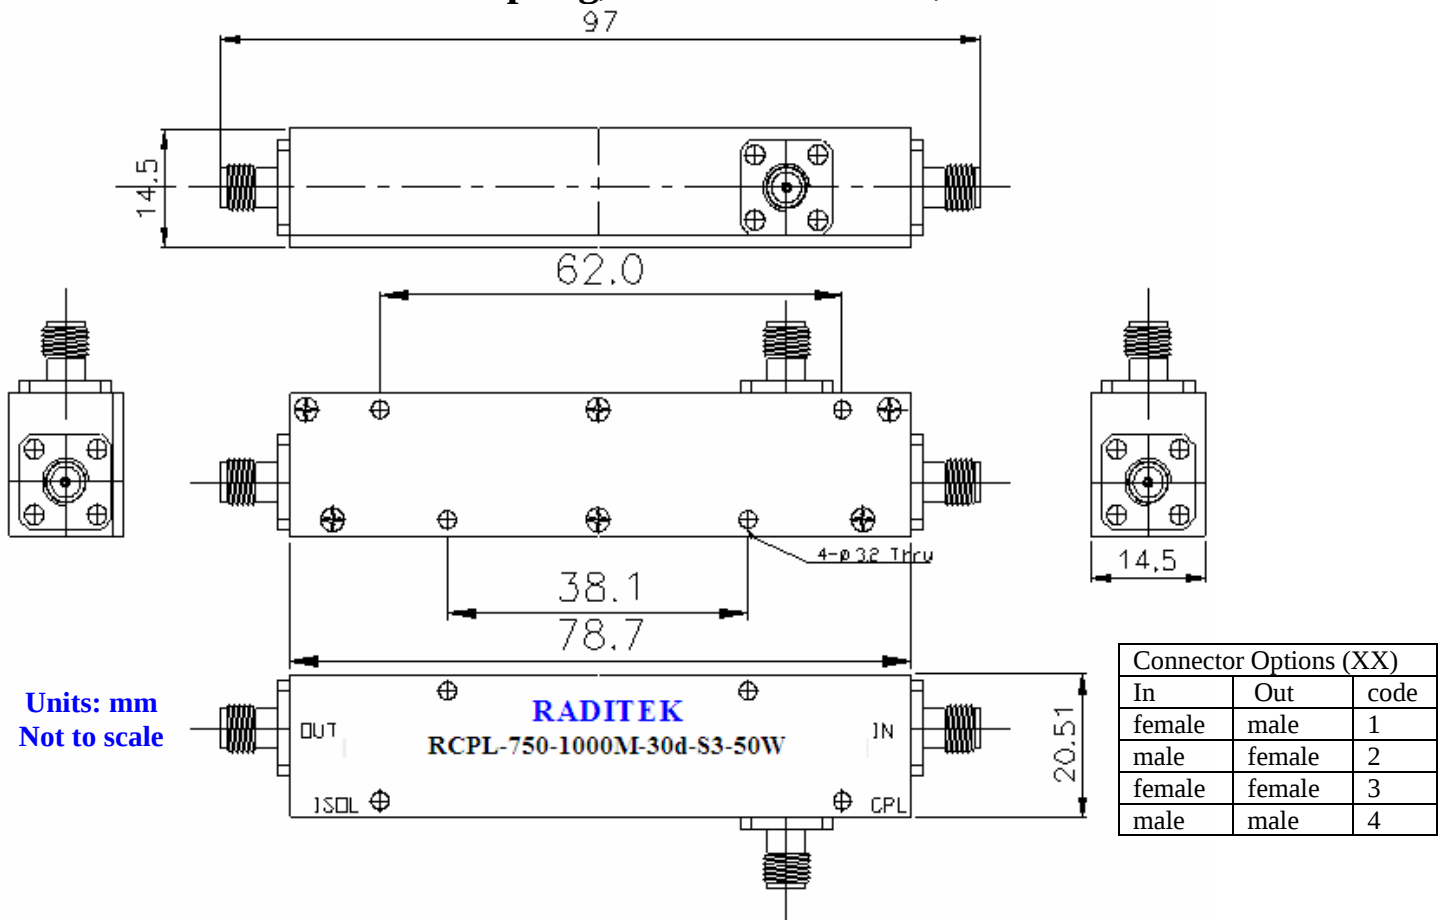

Order Examples: RCPL-750-1000M-30d-S3-50W

Description: (Coupler, 750-1000 MHz, 30 dB Coupling, SMA Female Connectors, 50 Watts)

SX (SMA connector option).

NX (N-type connector option, to 6GHz only).

Specifications		Units
Frequency	750-1000	MHz
Connectors	SMA or N	
Coupling factor	30 +/-1	dB
Insertion loss	0.2*	dB max (typical) *Excluding theoretical insertion loss
Isolation	25	dB min (typical)
VSWR (all ports)	1.15:1	Max. (typical)
RF Power	50	watt max.
Temperature	-55 to +85	°C operating

RCPL-750-1000M-30d-S3-50W-j

Specifications may be subject to change

03/03/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com