


Coupler, 800-4000MHz, 30dB Coupling N-Type Female Connectors, 75 Watts

code-z4

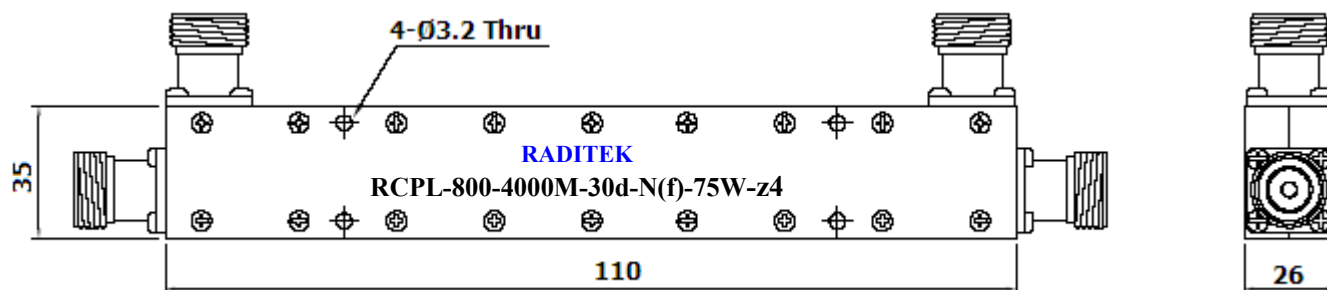

Units: mm
Not to scale

☎ Order Examples: RCPL-800-4000M-30d-N(f)-75W

Description: (Coupler, 800-4000MHz, 30dB Coupling, N Female Connectors, 75 Watts)

Specifications		Units
Frequency Range	800-4000	MHz
Insertion Loss	0.8	dB (max)
Return Loss	17.0	dB min
Coupling Value	30±2	dB max
Directivity	15.0	dB min
Coupling Flatness	±1.0	dB (max)
Power	75	Watts
Impedance	50	Ω
Connectors	N-Female	
Operating Temperature	-30 to +70	°C
Finish	Clear chemical film per MIL-C-5541, Class 3	