


Coupler, 880-1990MHz, 30dB Coupling N-Type Female Connectors, 100 Watts

code-z4

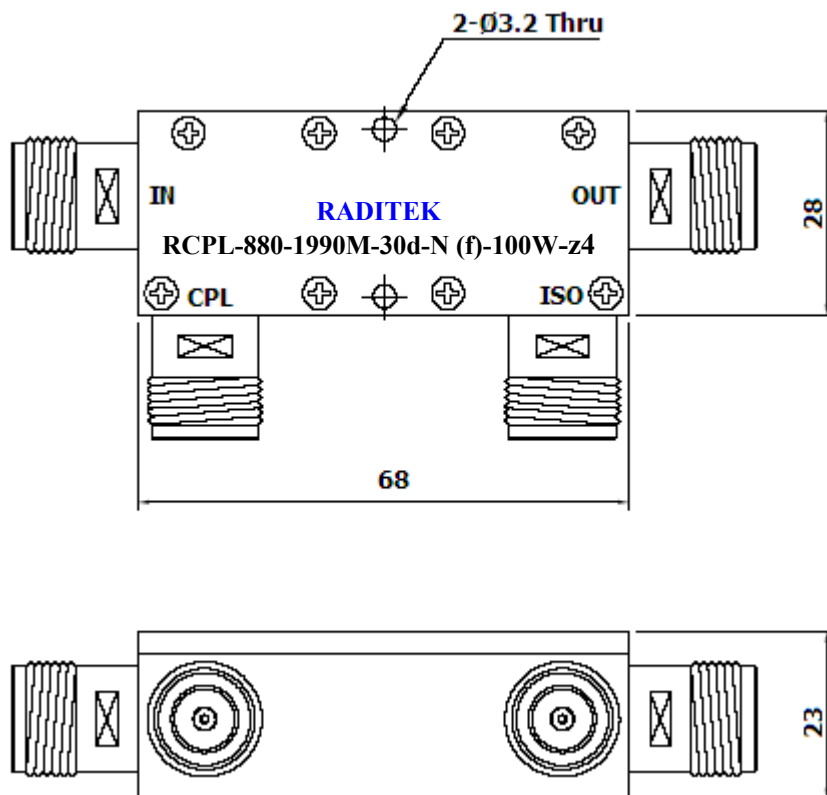

Units: mm
Not to scale

Order Examples: RCPL-880-1990M-30d-N (f)-100W

Description: (Coupler, 880-1990MHz, 30dB Coupling, N Female Connectors, 100 Watts)

Specifications		Units
Frequency Range	880-1990	MHz
Insertion Loss	0.2	dB (max)
Return Loss	20.0	dB min
Coupling Value	30±2.0	dB max
Directivity	15.0	dB min
Coupling Flatness	±1.5	dB (max)
Power	100	Watts
Impedance	50	Ω
Connectors	N-Female	
Operating Temperature	-30 to +70	°C
Finish	Clear chemical film per MIL-C-5541, Class 3	