


Coupler, 960-1160MHz, 30dB Coupling SMA Female Connectors, 100 Watts

code-z4

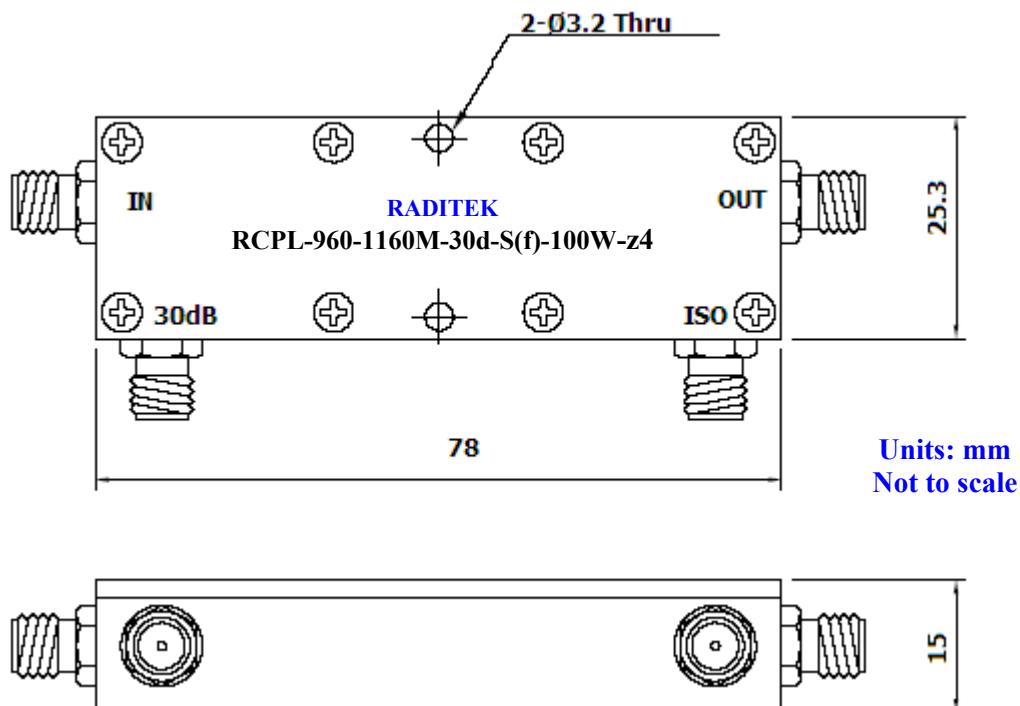

Order Examples: RCPL-960-1160M-30d-S(f)-100W

Description: (Coupler, 960-1160 MHz, 30dB Coupling, SMA Female Connectors, 100 Watts)

Specifications		Units
Frequency Range	960-1160	MHz
Insertion Loss	0.2	dB (max)
Return Loss	20.0	dB min
Coupling Value	30±1	dB max
Directivity	20.0	dB min
Coupling Flatness	±0.5	dB (max)
Power	100	Watts
Impedance	50	Ω
Connectors	SMA-Female	
Operating Temperature	-30 to +70	°C
Finish	Clear chemical film per MIL-C-5541, Class 3	