


RADITEK INC.

COUPLER, 2.0-2.7GHz 30dB Coupling, N-Type Connectors, 300 Watts

code-J

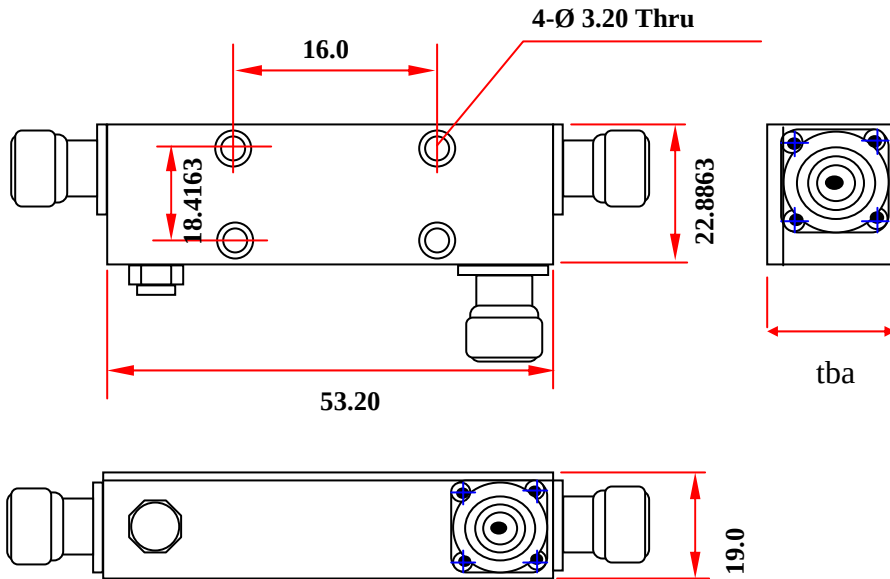

Connector option table				
		Iso	Circ	Circ
Port 1	Port 2	Iso	Port 3 male	Port 3 female
female	male	-1	-11	-21
male	female	-2	-12	-22
female	female	-3	-13	-23
male	male	-4	-14	-24

Units: mm
Not to scale

Order Examples: RCPL-2.0-2.7-30d-N3-300W

Description: (Coupler, 2.0-2.7GHz, Coupling 30dB, N Female Connectors, 300 Watts)

Specifications		
Frequency	2.0-2.7	GHz
Insertion Loss	0.2	dB
Directivity	25	dB
VSWR	1.20	:1
Coupling Value	30	dB±1
Connectors In	N-Type	(male)
Coupling / Connectors Out	N-Type	(female)
Impedence	50	Ohm
Input Power	300 CW min	Watts
Temperature Range	-30 to 70	°C

RCPL-2.0-2.7-30d-N3-300W-j

Specifications may be subject to change

11/10/06

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com