


Dual Directional Coupler, 20-400MHz, 30dB coupling SMA or N connectors, 50 Watts

code-r2

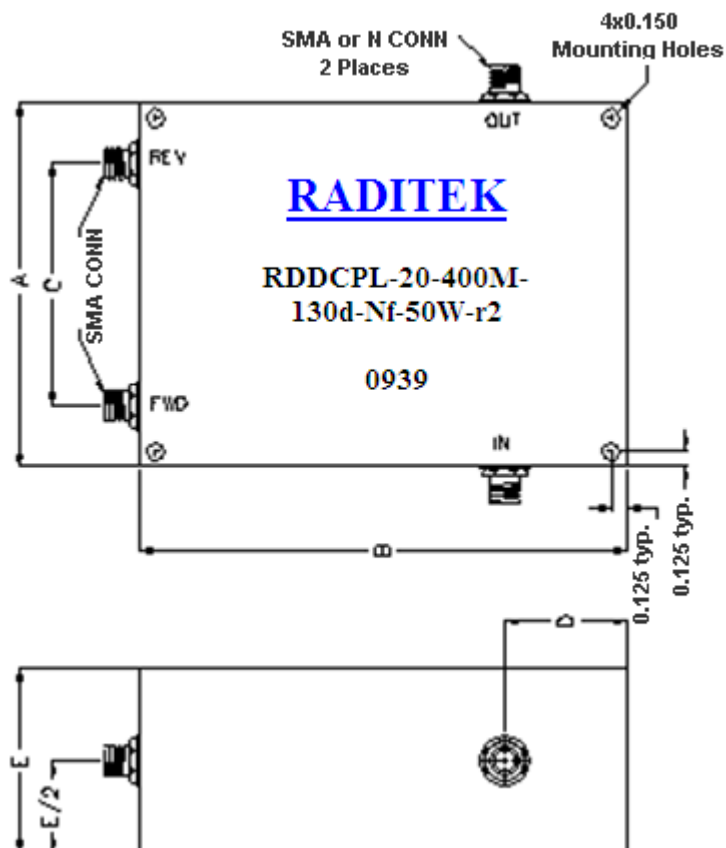

Outline Dimensions

A	B	C	D	E
1.50	2.00	0.70	0.50	1.00

Units: Inch
Not to scale

Order Examples: RDDCPL-20-400M-30d-Nf-50W-r2

Description: (Dual Directional Coupler, 20-400MHz, 30dB coupling, N Female Connectors, 50Watts)

Specifications		Units
Frequency Range	20-400	MHz
Coupling value	30±1.0	dB
Insertion Loss	0.3	dB max.
Coupling Flatness	± 0.50	dB max
VSWR	1.15	: 1 max.
Directivity	20	dB min
Input Power	50	Watts Max.
Temperature Range	-35 to +75	°C