


RADITEK INC.

Dual Directional Coupler, 20-500MHz, 50dB coupling, SMA Connectors, 200 Watts

code-v

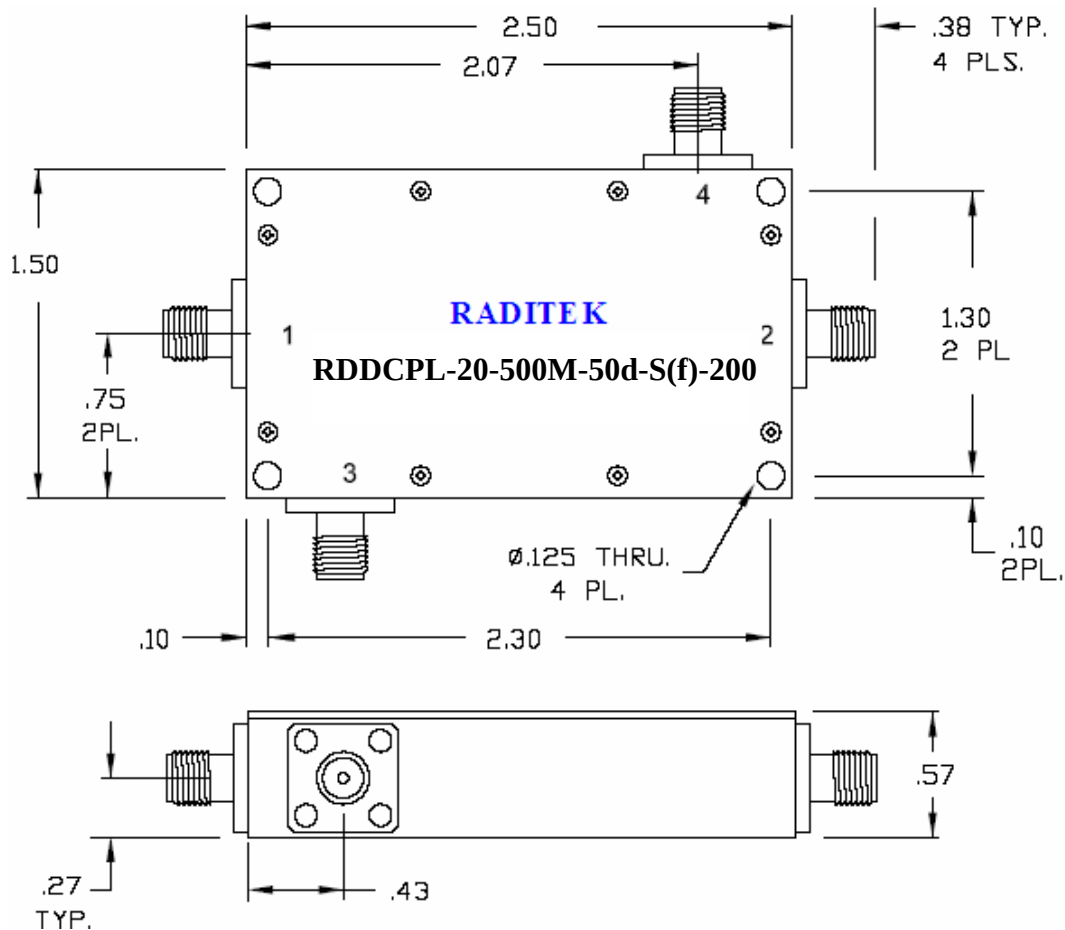

Units: Inches
Not to scale

Order Examples: RDDCPL-20-500M-50d-S(f)-200W

Description: (Dual Directional Coupler, 20 -500 MHz, 50dB Coupling, SMA-Female Connectors, 200 Watts)

Electrical Specifications		Units
Frequency:	20-500	MHz
Insertion Loss	0.3	dB (max)
VSWR	1.25:1	max
Coupling	50.0 ±1.0	dB
Directivity	>20	dB
Coupled Flatness	±0.50	dB (max)
Power	200	Watts
Connectors	SMA Female	

RDDCPL-20-500M-50d-S3-200W-v

Specifications may be subject to change

11/15/06

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com