


# RADITEK INC.

## Dual Directional Coupler, 80-1000 MHz 40dB Coupling, N-Type Female Connectors, 200 Watts

code-g

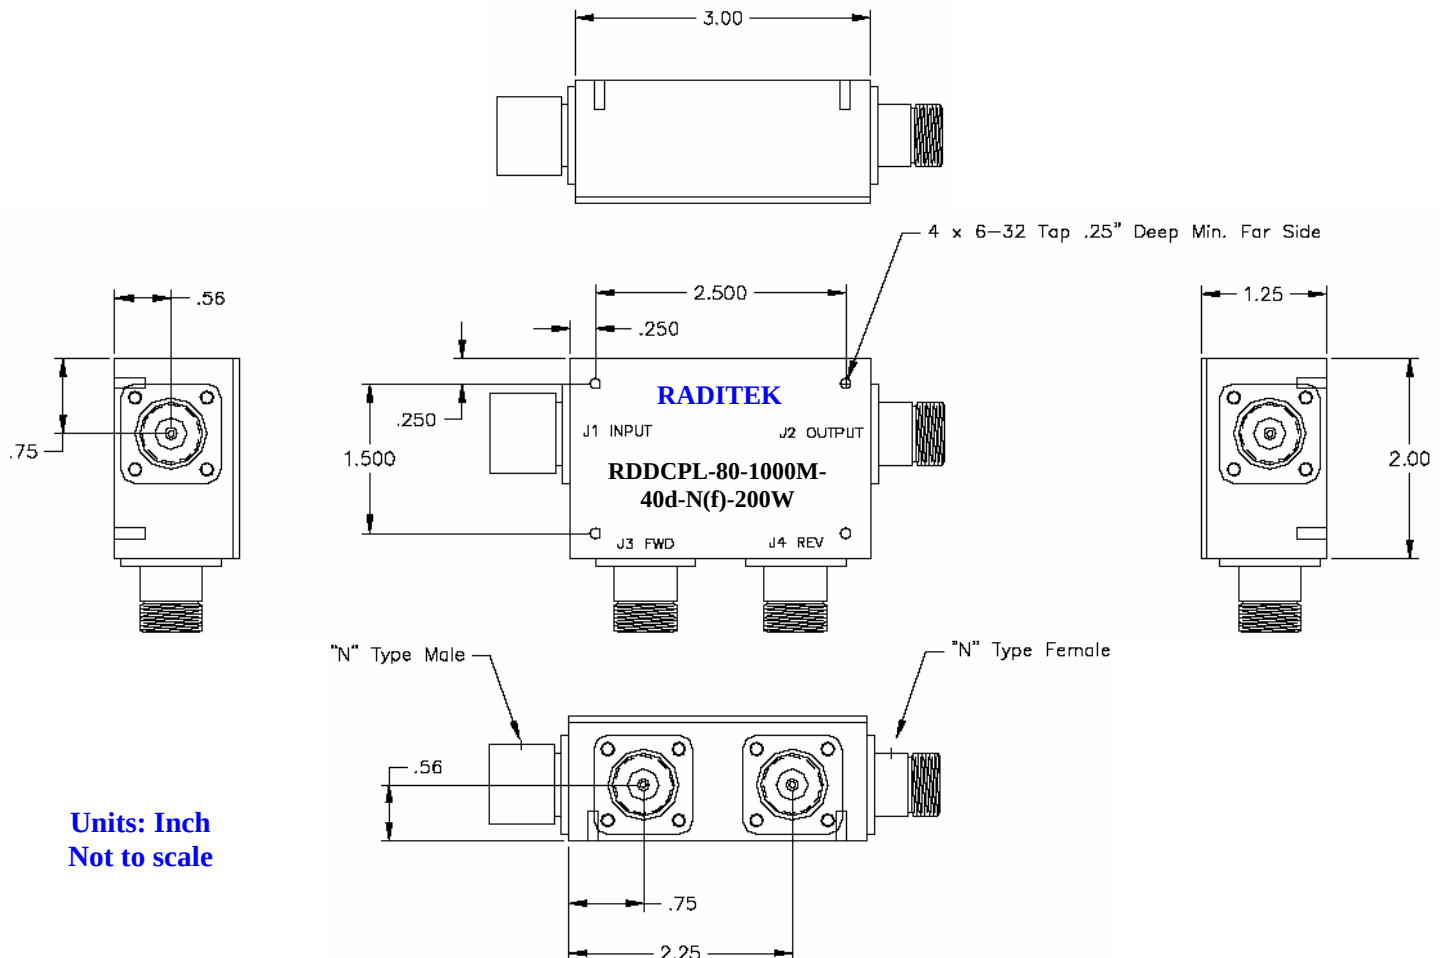

Units: Inch  
Not to scale

 **Order Examples: RDDCPL-80-1000M-40d-N(f)-200W**

**Description: (Dual Directional Coupler, 80-1000 MHz, 40 dB Coupling, N-Type Female Connectors, 200 Watts)**

| Specifications  |              | Units |
|-----------------|--------------|-------|
| Frequency       | 80-1000      | MHz   |
| Power (CW)      | 200          | W     |
| Peak            | 1000         | W     |
| Insertion Loss  | 0.25         | dB    |
| Coupling        | 40           | dB    |
| Directivity     | 20           | dB    |
| Flatness: (+/-) | 0.5          | dB    |
| VSWR: (ML)      | 1.2          | dB    |
| Connectors      | N            |       |
| Size            | 3 X 3 X 1.09 | in    |

**RDDCPL-80-1000M-40d-N(f)-200W-g**    **Specifications may be subject to change**

**11/16/06**

**WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.**

Telephone: (408) 266-7404    FAX: (408) 266-4483

WEB: [www.raditek.com](http://www.raditek.com), E-mail: [sales@raditek.com](mailto:sales@raditek.com)