


RADITEK INC.

Dual Directional Coupler, 100-500 MHz, 30dB Coupling SMA or N-Type Female Connectors, 200 Watts, 2kW Peak

code-g

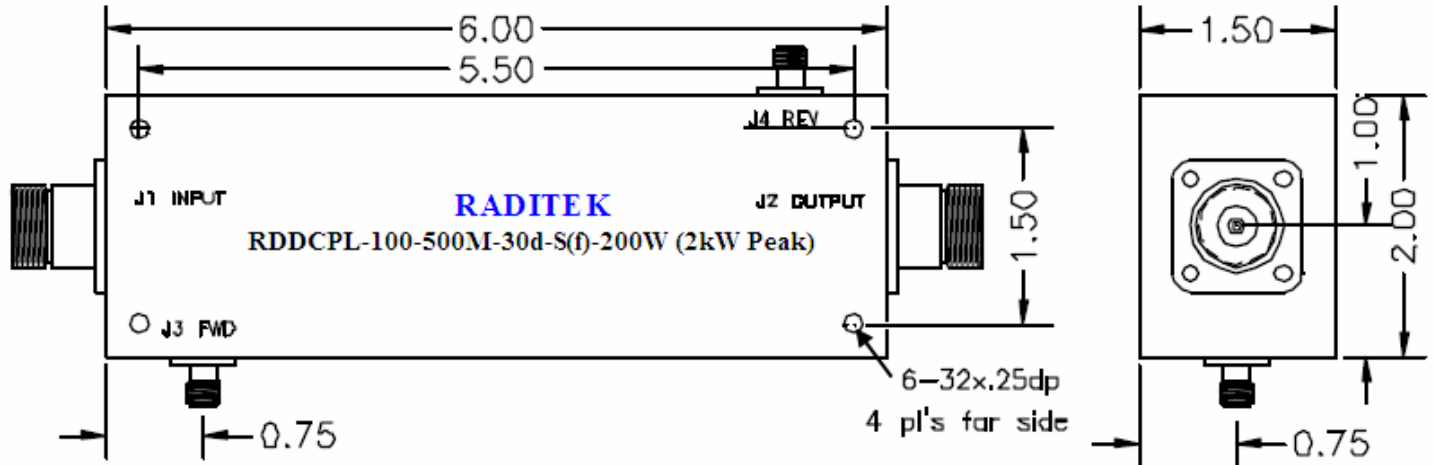

Units: Inch
Not to scale

 **Order Examples:** RDDCPL-100-500M-30d-S(f)-200W (1kW Peak)

Description: (Dual Directional Coupler, 100-500 MHz, 30dB Coupling, SMA Female Connectors, 200 Watts, 1kW Peak)

Specifications		Units
Frequency:	100-500	MHz
Insertion Loss	0.25	dB (max)
VSWR	1.20:1	max
Coupling	30	dB
Directivity	20	dB
Coupled Flatness	0.5	dB (max)
Power (CW)	200	Watts
Power (PEAK)	2000	Watts
Connectors	N/SMA	

RDDCPL-100-500M-30d-S(f)-200W (2kW Peak)-g **Specifications may be subject to change**

11/17/06

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com