


RADITEK INC.

Dual Directional Coupler, 250-270 MHz, 20 or 30dB Coupling SMA Female Connectors, 100 Watts

code-j

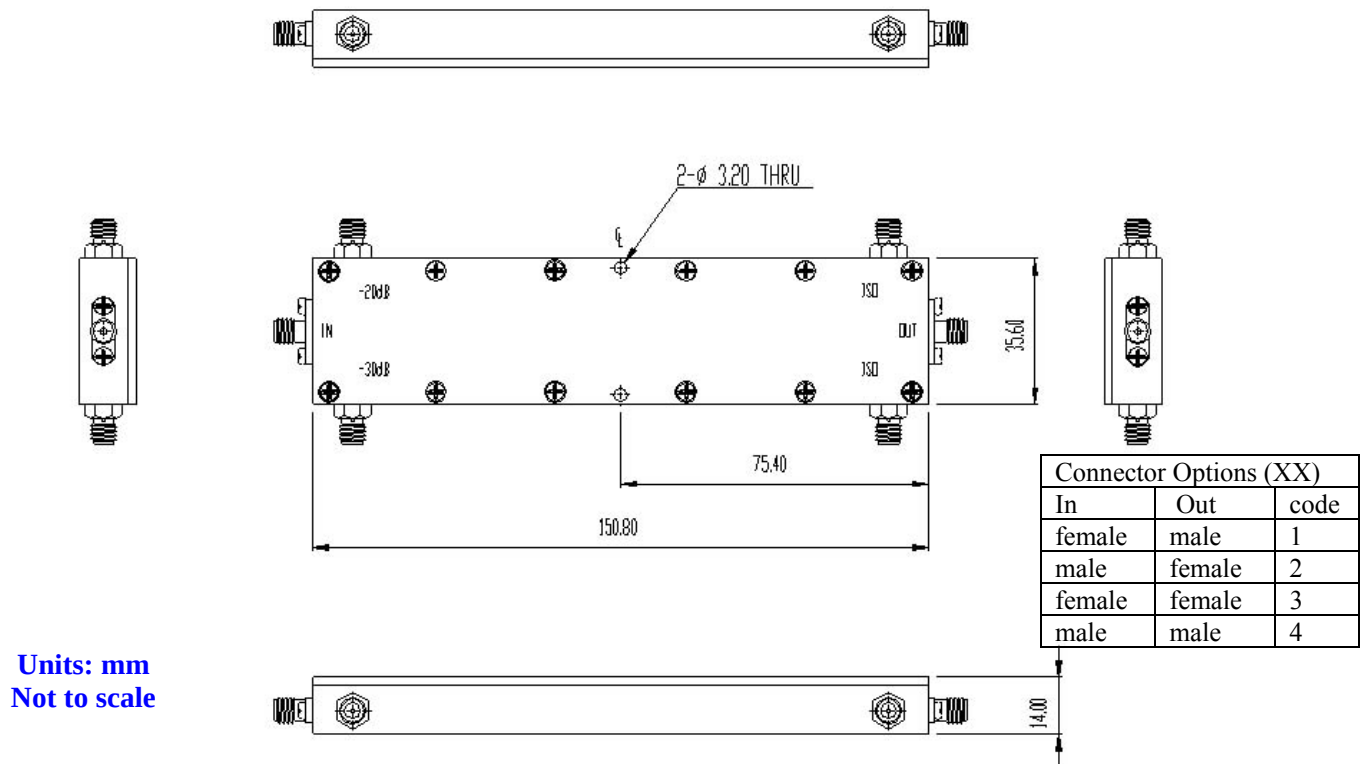

SX (SMA connector option).

Order Examples: RDDCPL-250-270M-30d-S3-100W

Description: (Dual Directional Coupler, 250-270 MHz, 30 dB Coupling, SMA Female Connectors, 100 Watts)

Specifications		Units
Frequency	250-270	MHz
Insertion loss	0.3	dB (max)
VSWR (all ports)	1.25	:1(max.)
Input Power Average	100	Watts (max).
Directivity	20	dB (max)
Coupling Value	20 or 30	± 1dB
Impedance	50	Ω nominal
Connectors	SMA,	