


RADITEK INC.

Dual Directional Coupler, 350-550 MHz, 30dB Coupling SMA or N-Type Female Connectors, 200 Watts, 1k Watt Peak

code-g

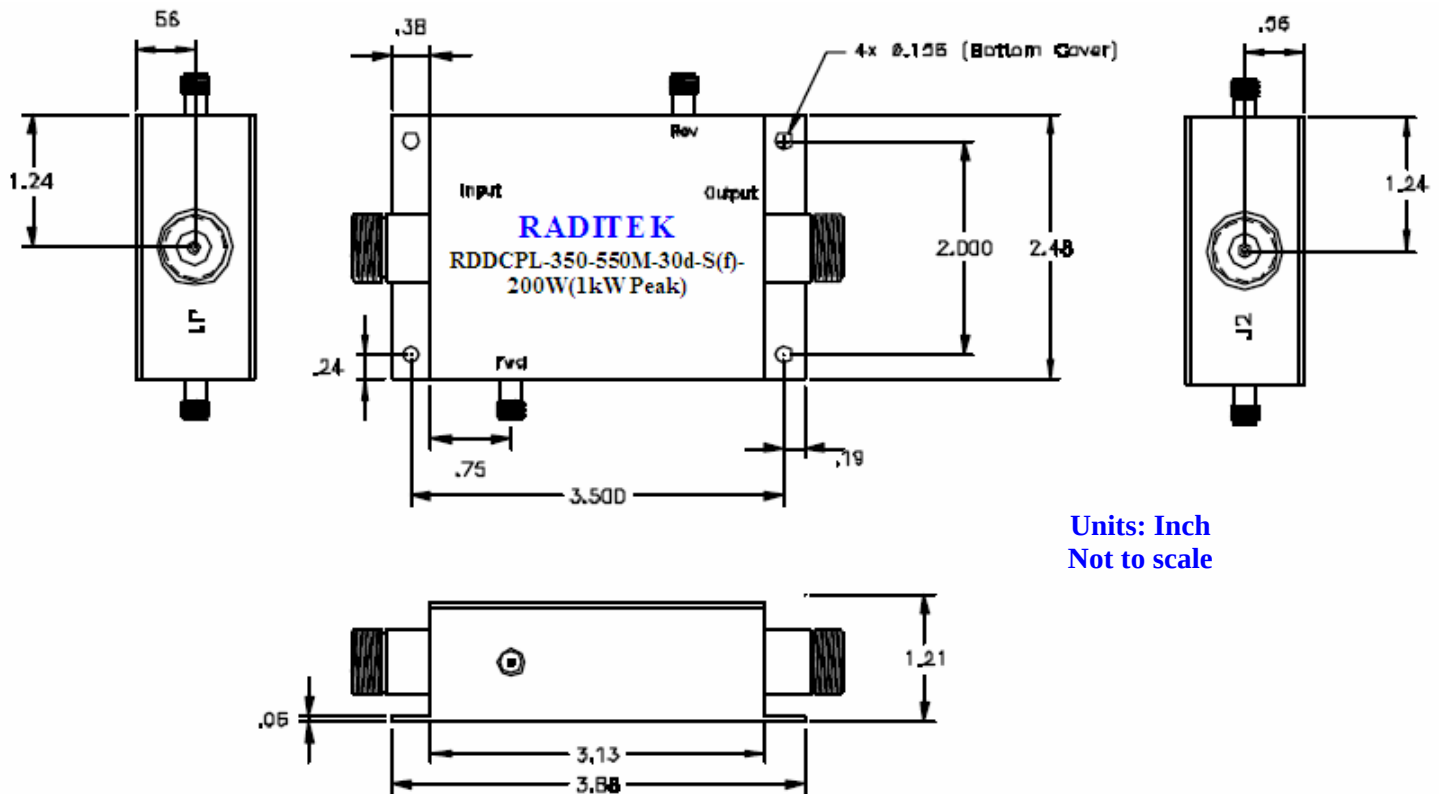

 **Order Examples:** RDDCPL-350-550M-30d-S(f)-200W (1kW Peak)

Description: (Dual Directional Coupler, 350-550 MHz, 30 dB Coupling, SMA Female Connectors, 200 Watts, 1kW Peak)

Specifications		Units
Frequency:	350-550	MHz
Insertion Loss	0.2	dB (max)
VSWR	1.1:1	max
Coupling	30	dB
Directivity	25	dB
Coupled Flatness	0.5	dB (max)
Power (CW)	200	Watts
Power (PEAK)	1000	Watts
Connectors	SMA/N	

RDDCPL-350-550M-30d-S(f)-200W (1kW PEAK)-g **Specifications may be subject to change**

11/16/06

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com