


90° Hybrid Coupler, 250-500MHz
3dB Coupling, SMA Female Connectors, 200 Watts
RQH-250-500M-3d-SMA(f)-200W-L4

code-L4

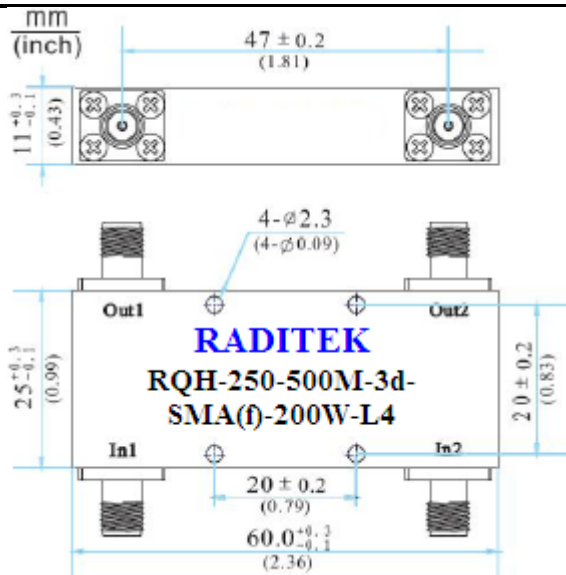

Order Examples: RQH-250-500M-3d-SMA(f)-200W-L4

Description: (Quad Hybrid, 250-500MHz, 3dB Coupling, SMA Female Connectors, 200 Watts)

Specifications		Units
Frequency	250-500	MHz
Insertion loss	0.3	dB
Isolation	22	dB
VSWR (all ports)	1.20	:1
RF Power Average	200	Watt CW
Phase Unbalance	±2.0	degree
Amplitude Unbalance	±0.5	dB
Coupling factor	3	dB
Connectors	SMA	Female
Operating Temperature	-55 to +85	°C
Storage Temperature	-55 to +100	°C