ROHS Compliant

RADITEK INC.

Quadrature Hybrid Coupler, 1000-2000MHz
TNC Female Connectors, 10 Watts

code-z4

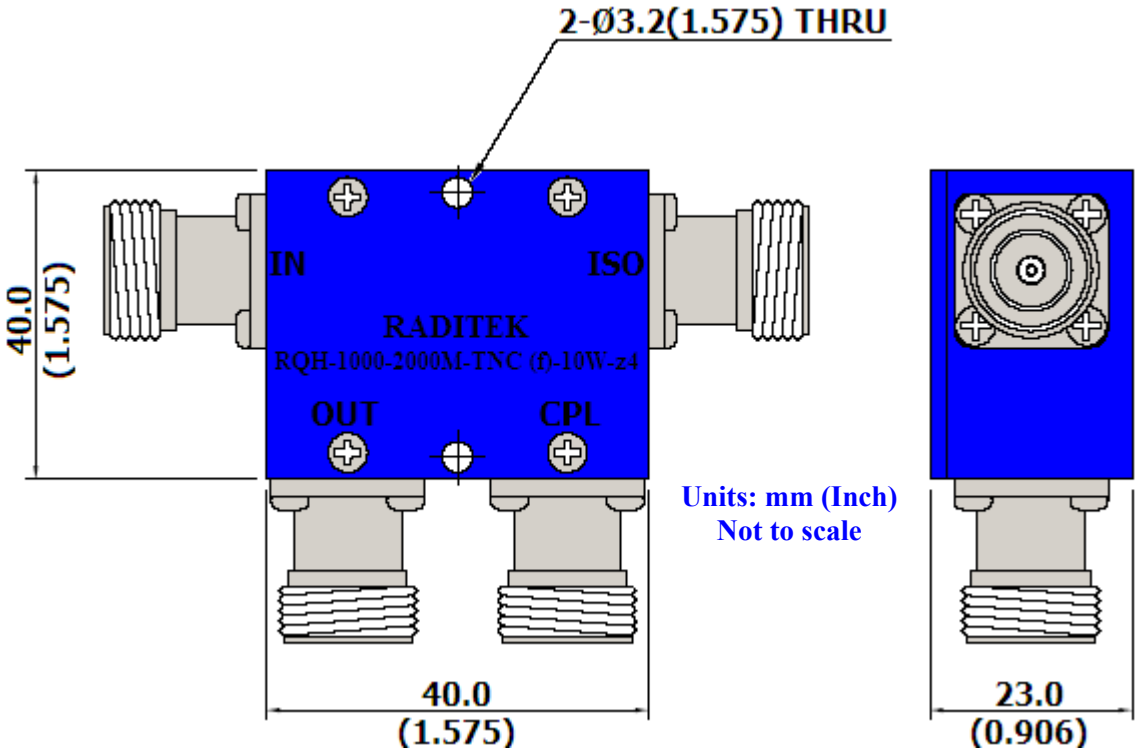

Units: mm (Inch)
Not to scale

☎ **Order Examples:** **RQH-1000-2000M-TNC(f)-10W-z4**

Description: (Quad Hybrid, 1000-2000MHz, TNC female Connector, 10 Watts)

Specifications		Units
Frequency Range	1000-2000	MHz
Insertion Loss	0.5	dB (max)
Return Loss	16.0	dB min
Amplitude Balance	±1.2	dB max
Phase Balance	±5	deg (max)
Isolation	18.0	dB min
Power	10	Watts CW max
Impedance	50	Ω
Connector	TNC Female	
Operating Temperature	-54 to +85	°C

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.
Telephone: (408) 266-7404 FAX: (408) 266-4483
WEB: www.raditek.com , E-mail: sales@raditek.com