


Isolator, 3.6-4.2GHz, SMA or N connector, 30 Watt

code-c

RADI-3.6-4.2-S3-30WR-c

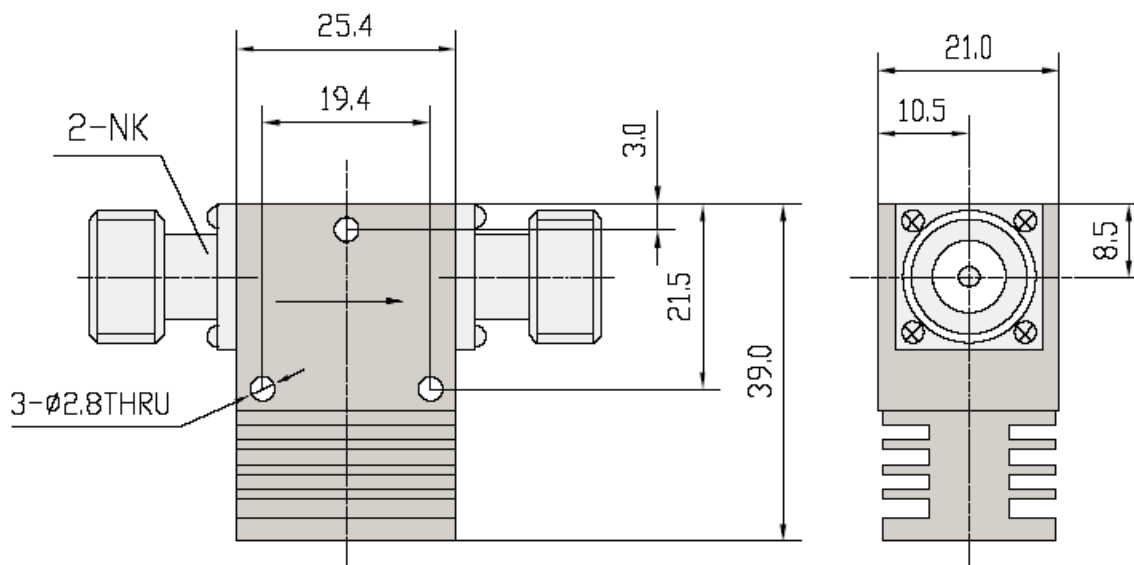

Direction of RF:	
R	Default ►
L	◄

Units: mm(Inch)
Not to scale

 **Order Examples: RADI-3.6-4.2M-S3-30WR-c**
I=ISOLATOR

N / SMA Connector options (X)		
Isolator		
Port 1	Port 2	
Female	Male	-1
Male	Female	-2
Female	Female	-3
Male	Male	-4

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
3.6-4.2	0.4	20	1.20	30	30	-40 to +75	SMA