


DESCRIPTION

PMI MODEL: LD-50-SHS-N-1 IS A HIGH SPEED, HIGH POWER, HIGH SENSITIVITY HARD DIODE LIMITER-DETECTOR. IT OPERATES OVER THE FREQUENCY RANGE OF 0.5 TO 18GHz

SPECIFICATIONS

- FREQUENCY RANGE: 0.5 TO 18 GHz (OPTION 0518)
2.0 TO 18 GHz (OPTION 218)
6.0 TO 18 GHz (OPTION 618)
0.2 TO 2 GHz (OPTION 052)
- FREQUENCY FLATNESS: $\pm 1.5\text{dB}$ MAX, $\pm 1.0\text{dB}$ TYP
- VSWR: 3.5:1 MAX
- VIDEO CAPACITANCE: 10 pF
- SPEED: 10ns
- INPUT POWER: 1W CW MAX. (+40 dBm PEAK, 1us)
- VOLTAGE SENSITIVITY: 700 mV/mW
- TANGENTIAL SENSITIVITY: -50dBm @ 2 MHz VIDEO BANDWIDTH
- CONNECTORS: SMA FEMALE
- FINISH: BLUE EPOXY POLIMIDE COATING IAW MIL-C-22750, TYPE I OVER EPOXY POLIMIDE PRIMER IAW MIL-P-23377, TYPE I, CLASS 1 OR 3.
- SIZE: 0.5" X 0.5" X 0.22"

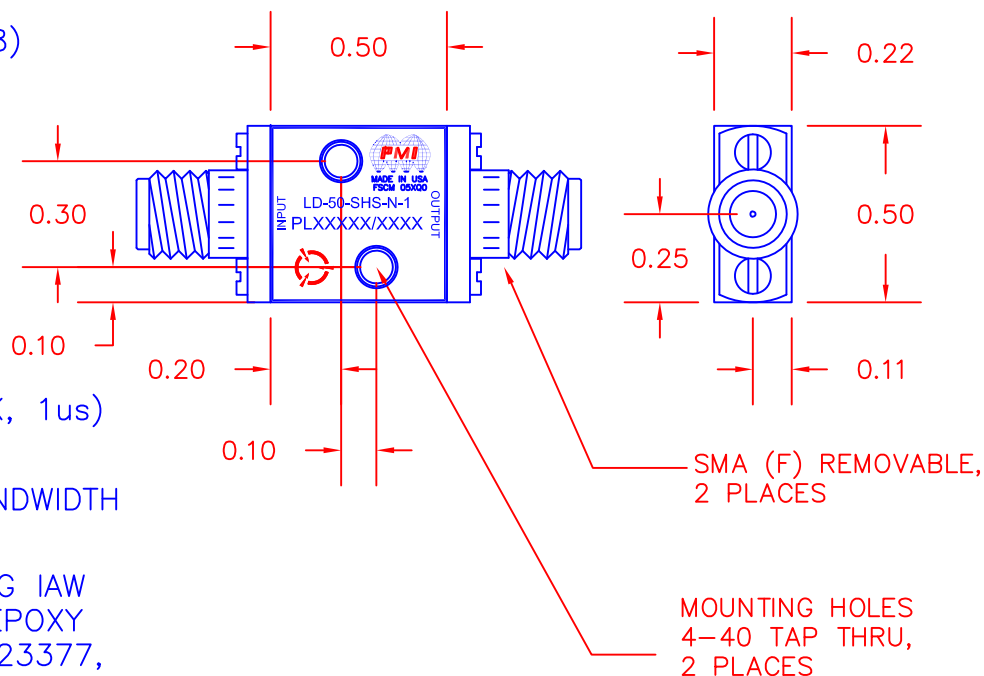

PMI CONFIDENTIAL AND PROPRIETARY

ENVIRONMENTAL RATINGS

- TEMPERATURE: -54°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010
WEIGHT: X.XX oz.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	6/18/15	

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE			REV.	
DRAWN		6/18/15		PRODUCT FEATURE				
CHECKED				LD-50-SHS-N-1				
ISSUED				HARD LIMITER-DETECTOR				
				SIZE	FSCM NO.	DWG NO.		
				A	05XQ0	PRELIMINARY		
				SCALE	N:S		SHEET	1 OF 1