

DESCRIPTION

THE PMI MODEL PS-90-2040-SY IS A MINIATURE, 0 TO 180° BI-PHASE MODULATOR/PHASE SHIFTER WITH TTL CONTROL LOGIC OPERATING OVER A FREQUENCY RANGE OF 2856 MHz $\pm$ 15MHz.

SPECIFICATIONS

- FREQUENCY RANGE: 2856MHz $\pm$ 15MHz
- RF IMPEDANCE: 50 Ω NOMINAL
- DIFFERENTIAL PHASE SHIFT: 180° $\pm$ 2°
- DIFFERENTIAL INSERTION LOSS: 0.3dB MAX.
- INSERTION LOSS: 1.0dB MAXIMUM
- VSWR INPUT: 1.2:1 MAX
- CONTROL INPUT: TTL, 1 UNIT LOAD
- SWITCHING TIME: 50ns MAX, 10% TO 90%
- RF INPUT POWER: 1.0 WATT CW MAX
- POWER SUPPLY
 - +V: + 5V @ 70mA MAXIMUM
 - V: -12V @ 30mA MAXIMUM
- DC CONNECTORS: RFI FILTER, SOLDER TERMINAL
- FINISH: PAINTED GRAY


ENVIRONMENTAL RATINGS

- TEMPERATURE: -55°C TO +85°C (OPERATING)
..... -65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX $\pm$ 0.020
X.XXX $\pm$ 0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	ORIGINAL RELEASE	01/25/08	

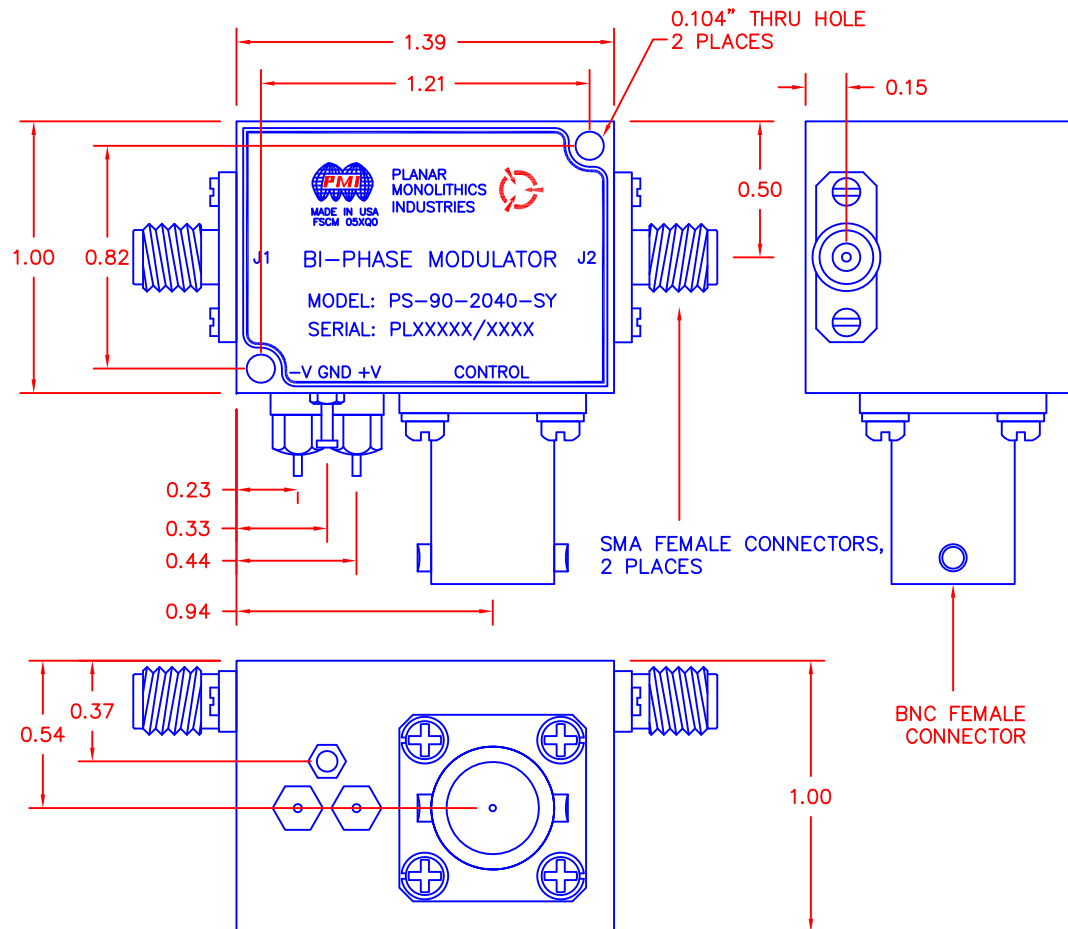

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-G GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-631-1579 FAX: 301-662-2029
WEBSITE: www.planarmonolithicsindustries.com
E-MAIL: sales@planarmonolithics.com
ISO 9001:2000 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN		1/25/08		PRODUCT FEATURE	
CHECKED				PS-90-2040-SY	
ISSUED				2856 MHz $\pm$ 15MHz BI-PHASE MODULATOR/PHASE SHIFTER	
		SIZE	FSCM NO.	DWG NO.	REV.
		A	05XQ0	27008307	A
		SCALE N:S			SHEET 1 OF 1