

## DESCRIPTION

PMI MODEL NUMBER PS-360-8D5G11G-6-SFF IS AN 8.5 TO 11 GHz 6 BIT DIGITALLY CONTROLLED PHASE SHIFTER WITH CAPABILITY FOR PHASE SHIFTING FROM 0° TO 360°, WITH RESOLUTION AS FINE AS 5.68°.

## SPECIFICATIONS

- FREQUENCY RANGE: 8.5 TO 11 GHz
- INPUT POWER: (OPERATING): 13dBm Max
- INPUT POWER (SURVIVAL): 30dBm MAX.
- INSERTION LOSS 10dB TYP, 12dB MAX
- PHASE CONTROL RANGE: 360° Min
- PHASE CONTROL BITS POSITIVE BINARY 6 BIT
- PHASE LSB STEP 5.68°
- PASSBAND PHASE ACCURACY: ±9° TYP, ±12° MAX
- PHASE FLATNESS ±12° MAX (OVER ANY 1 GHz IN THE PASSBAND)
- PM/AM ±2 dB MAX
- SPURIOUS SIGNALS -130 dBm MAX( NO RF INPUT OR CONTROL UPDATES)
- SWITCHING SPEED 500 ns MAX. (DIGITAL DELAY + RF ENVELOPE RISE/FALL TIME)
- VSWR: (IN/OUT) 2.0:1 MAX.
- CONNECTORS (RF) SMA FEMALE
- CONNECTOR (CONTROL) 14-PIN MALE HERMETIC CONNECTOR IAW MIL-C-28748  
MATING CONNECTOR SHIPPED WITH UNIT (\*18 WEEK LEAD TIME\*)
- POWER SUPPLY +15VDC @ 250mA MAX ±5%.  
-15VDC @ 20mA MAX ±5%.
- SIZE: (L) 1.60" X (W) 1.75" X (H) 0.50"  
\*EXCLUDING MOUNTING HOLES + CONNECTOR
- FINISH: BLUE EPOXY POLIMIDE COATING IAW MIL-C-22750,  
TYPE I OVER EPOXY POLIMIDE PRIMER  
IAW MIL-P-23377, TYPE I, CLASS 1 OR 3.

## CONTROL (J3) SELECT & DC POWER INPUTS

- SIGNAL TYPE: POSITIVE BINARY LOGIC PHASE SHIFT CONTROL
- BIT SELECTED: HIGH
- BIT NOT SELECTED: LOW

\* INPUTS SHALL NOT PRESENT A VOLTAGE OUTSIDE THE RANGE OF 0V TO +5V AT ANY TIME


## ENVIRONMENTAL RATINGS

- TEMPERATURE: 0°C TO +85°C (OPERATING)  
-20°C TO +85°C (STORAGE)
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE  
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES  
TOLERANCES:  
X.XX ±0.020  
X.XXX ±0.010

| REVISIONS |      |             |         |
|-----------|------|-------------|---------|
| ZONE      | REV. | DESCRIPTION | DATE    |
|           | —    | PRELIMINARY | 6/19/18 |

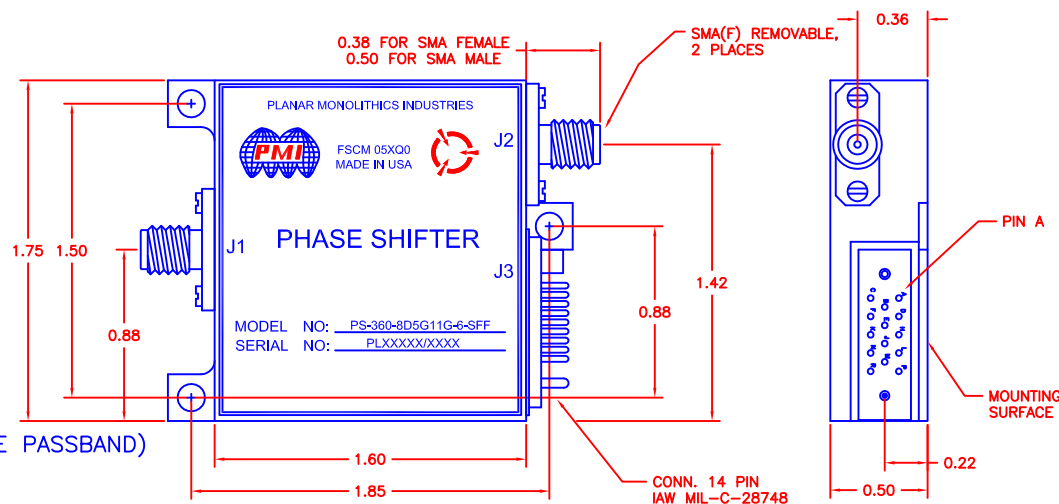

| PIN NO: | J3 PIN FUNCTIONS |
|---------|------------------|
| A       | GND              |
| B       | N/C              |
| C       | -15VDC           |
| D       | N/C              |
| E       | N/C              |
| F       | 5.68° (LSB)      |
| H       | 22.5°            |
| J       | 11.3°            |
| K       | 90.0°            |
| L       | 180° (MSB)       |
| M       | +15VDC           |
| N       | 45.0°            |
| P       | GND              |
| R       | N/C              |

PMI CONFIDENTIAL AND PROPRIETARY

## PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD  
FREDERICK, MARYLAND 21704 USA  
TEL: 301-662-5019 FAX: 301-662-1731  
WEBSITE: [www.pmi-rf.com](http://www.pmi-rf.com)  
E-MAIL: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)  
ISO 9001 CERTIFIED



| APPROVALS |     | DATE    | TITLE                        |                |                     |        |
|-----------|-----|---------|------------------------------|----------------|---------------------|--------|
| DRAWN     | NJA | 12/2/11 | PRODUCT FEATURE              |                |                     |        |
| REDRAWN   | CW  | 6/19/18 | PS-360-8D5G11G-6-SFF         |                |                     |        |
| ISSUED    |     |         | 8.5 to 11 GHz, PHASE SHIFTER |                |                     |        |
| SCALE N:S |     |         | SIZE A                       | FSCM NO. 05XQ0 | DWG NO. PRELIMINARY | REV. — |
|           |     |         | SHEET                        |                | 1 OF 1              |        |