

DESCRIPTION


PMI MODEL PS-360-3237-8-292FF IS A HIGH SPEED 32 TO 37 GHz FREQUENCY RANGE PHASE SHIFTER WITH AN 8-BIT TTL CONTROL. THIS MODEL OFFERS A LOW PHASE SHIFT ERROR OF TYPICALLY ± 5.0 DEGREES.

SPECIFICATIONS

- FREQUENCY RANGE: 32 TO 37 GHz
- INSERTION LOSS: 13.0 dB TYPICAL
- VSWR INPUT: 2.0:1 TYP, 2.3:1 MAX (J2)
- VSWR OUTPUT: 2.5:1 TYP, 3.0:1 MAX (J1)
- LSB: 1.40625°
- CONTROL BITS: 8 LINE (TTL CONTROL)
- MAX PHASE SHIFT: 358.59375°
- AMPLITUDE ERROR: ± 1.5 dB TYP.
- PHASE SHIFT ERROR: ± 5.0 ° TYP.
- SWITCHING SPEED: 500ns MAX
- POWER SUPPLY: +15V @90mA MAX
-15V @60mA MAX
- RF CONNECTORS: 2.92mm FEMALE INPUT & OUTPUT
- CONTROL: (MDM15SSP) 15 PIN MICRO-D SHIPPED WITH MATING CONNECTOR
- SIZE: 1.150" X 1.800" X 0.4"
- FINISH: GRAY EPOXY POLIMIDE COATING IAW MIL-C-22750, TYPE I OVER EPOXY POLIMIDE PRIMER IAW MIL-P-23377, TYPE I, CLASS 1 OR 3.

15-PIN CONNECTOR PIN-OUT	
PIN	FUNCTION
1	CTL1 (LSB)
2	CTL2
3	CTL3
4	CTL4
5	CTL5
6	CTL6
7	CTL7
8	CTL8 (MSB)
9	NC
10	NC
11	NC
12	NC
13	+15 VDC
14	GND
15	-15 VDC

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	6-13-12	
	A1	ECN # 13-0030	5-2-13	PK 5/3/13

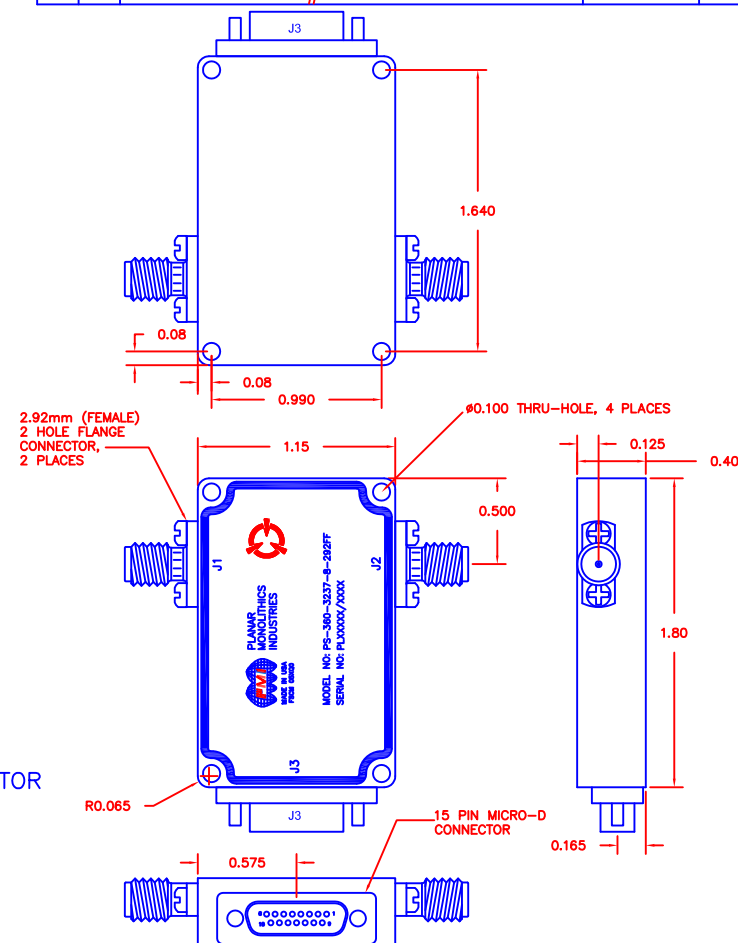

PMI CONFIDENTIAL AND PROPRIETARY

ENVIRONMENTAL RATINGS

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001:2000 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN	RJV	1-30-13		PRODUCT FEATURE	
MODIFIED				PS-360-3237-8-292FF	
ISSUED				32 TO 37 GHz PHASE SHIFTER	
SIZE	FSCM NO.	DWG NO.	REV.		
A	05XQ0	27017021	A1		
SCALE	N:S	SHEET	1 OF 1		