

DESCRIPTION

PMI MODEL NUMBER: PSDM-25R5G27G-360 IS A 8 BIT DIGITALLY CONTROLLED PHASE SHIFTER, OPERATING OVER THE 25.5 TO 27 GHz FREQUENCY RANGE. THIS MODEL FEATURES AN LSB OF 1.4° AND 360° OF PHASE CONTROL, ALL IN A SLIM LINE PACKAGE MEASURING ONLY (L) 2.0" X (W) 1.8" (H) 0.4".

SPECIFICATIONS

- FREQUENCY RANGE: 25.5 TO 27 GHz
- INSERTION LOSS: 12 dB MAX
@ 0dBm INPUT POWER
- VSWR: 2.2:1 MAX
@ 0dBm INPUT POWER
- PHASE CONTROL RANGE: 360 DEGREES
- PHASE LSB STEP: 1.4 DEGREES
- PHASE FLATNESS: ±10 DEGREES TYP @ 0dBm INPUT POWER
- AMPLITUDE VARIATION VS. POWER: ±3 dB TYP (-10 dBm TO +5dBm INPUT POWER)
- AMPLITUDE VARIATION VS. TEMPERATURE ±5 dB TYP (-40°C TO +85°C) @ 0dBm INPUT POWER
- PHASE VARIATION VS. POWER: ±10 DEGREES TYP (-10 dBm TO +5dBm INPUT POWER)
- PHASE VARIATION VS. TEMPERATURE: ±20 DEGREES TYP (-40°C TO +85°C) @ 0dBm INPUT POWER
- SWITCHING SPEED: 200ns MAX
- INPUT POWER: +10dBm MAX
- DC SUPPLY: +12 to +15VDC @ 100mA
- SIZE: (L) 2.0" X (W) 1.8" (H) 0.4"
- PWR/CTL CONNECTORS: 15 PIN MICRO-D-FEMALE (MATING CONNECTOR SUPPLIED)
- FINISH: BLUE PAINT

ENVIRONMENTAL RATINGS:

TEMPERATURE: -40°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)

HUMIDITY: MIL-STD-202F, METHOD 103B COND. B

SHOCK: MIL-STD-202F, METHOD 213B COND. B

VIBRATION: MIL-STD-202F, METHOD 204D COND. B

ALTITUDE: MIL-STD-202F, METHOD 105C COND. B

TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107 COND. A


NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PIN NO:	J3 PIN FUNCTIONS
1	11.25°
2	5.625°
3	2.813°
4	1.406° (LSB)
5	GND
6	Not Used
7	Not Used
8	GND
9	Not Used
10	Not Used
11	+12V to +15V
12	180° (MSB)
13	90°
14	45°
15	22.5°

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY RELEASE	9/16/15	

MECHANICAL OUTLINE

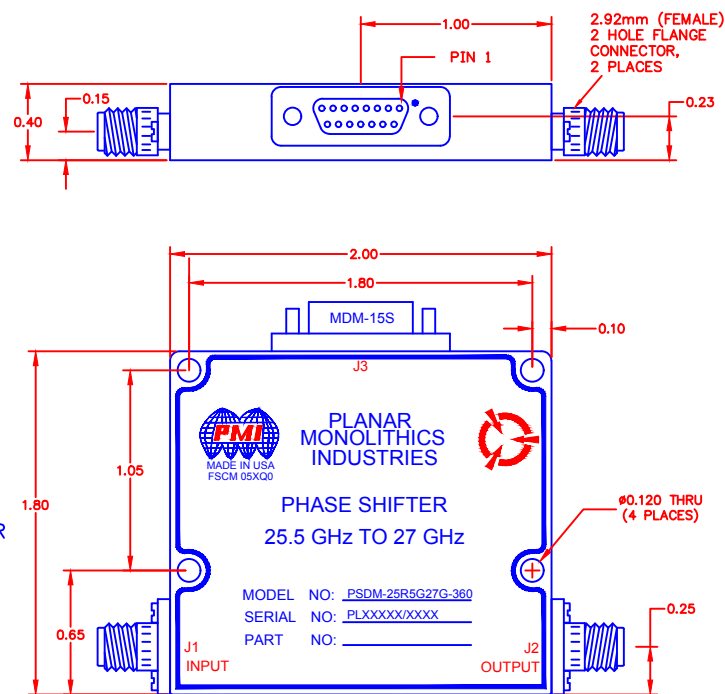

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN		9/16/15		PRODUCT FEATURE	
CHECKED				PSDM-25R5G27G-360	
ISSUED					
SIZE	FSCM NO.	DWG NO.	REV.		
A	05XQ0	270XXXXX	-		
SCALE N: S		SHEET		1 OF 1	