

DESCRIPTION


PMI MODEL: LM-1G18G-16-4W-SMF IS A COAXIAL LIMITER WITH AN OPERATING RANGE OF 1.0 GHz TO 18.0 GHz. THIS MODEL HAS A MAXIMUM INSERTION LOSS OF 2.3 dB AT -10 dBm INPUT POWER WITH A VSWR OF 2.0:1 MAXIMUM. THIS COMPACT UNIT MEASURES 0.90" x 0.38" SQUARE AND IS OUTFITTED WITH SMA CONNECTORS.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	02/12/18	

SPECIFICATIONS

- FREQUENCY RANGE: --- 1.0 TO 18.0 GHz
- RF POWER HANDLING: - 4 W CW MIN @ +85°C
1000 W PEAK MIN @ +85°C (1 μ s PULSE WIDTH, 0.1% DUTY CYCLE)
- INSERTION LOSS: ----- 2.3 dB MAX @ -10 dBm INPUT POWER
- RECOVERY TIME (3 dB): - 250 ns MAX @ 1000 W PEAK POWER
- LEAKAGE POWER: ----- 40 mW MAX
- SPIKE LEAKAGE: ----- 0.1 erg. MAX
- VSWR: ----- 2.0:1 MAX @ -10 dBm INPUT POWER
- LIMITING THRESHOLD: - +5 dBm MIN (1 dB COMPRESSION)
- CONNECTORS: ----- INPUT: SMA MALE
OUTPUT: SMA FEMALE
- WEIGHT: ----- 20g [0.705 oz] MAX
- SIZE: ----- (L) 22.86mm x (W) 9.65mm x (H) 9.65mm MAX
[(L) 0.90" x (W) 0.38" x (H) 0.38" MAX
EXCLUDING CONNECTORS
- FINISH: ----- PAINTED BLUE

MECHANICAL OUTLINE

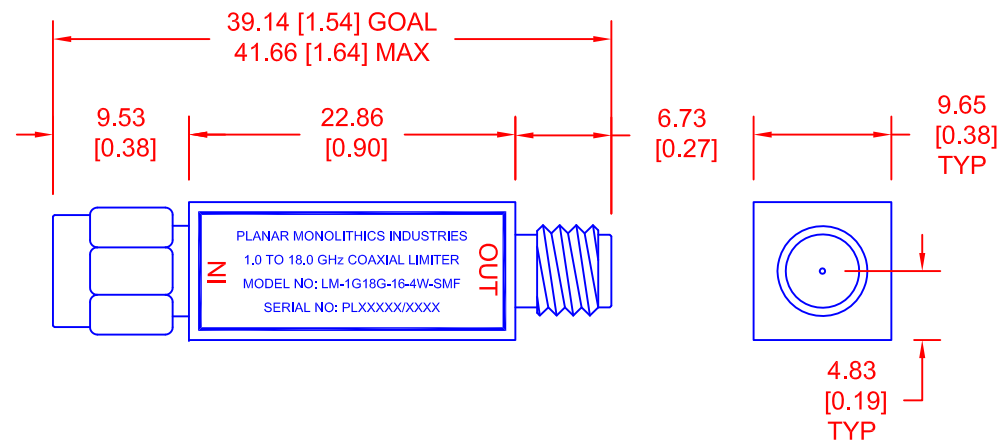

ENVIRONMENTAL RATINGS

IAW MIL-E-5400, CLASS 2 EQUIPMENT

- TEMPERATURE: ----- -54 °C TO +85 °C (OPERATING)
-62 °C TO +95 °C (STORAGE)
- VIBRATION: ----- 0.1 inchpp OR $\pm$ 10G, 5 ~ 500 Hz
(FIGURE 2, SHEET 1 OF 3, CURVE IV)
- SHOCK: ----- 15G, 11 $\pm$ 1 ms
- HUMIDITY: ----- 100%
- ALTITUDE: ----- 70,000 FT

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD

FREDERICK, MARYLAND 21704 USA

TEL: (301)-662-5019, FAX: (301)-662-1731

WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com

ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN <i>M. Berry</i>		02/12/18		PRODUCT FEATURE LM-1G18G-16-4W-SMF 1.0 to 18.0 GHz Coaxial Limiter	
CHECKED				SIZE A	FSCM NO. 05XQ0
ISSUED				DWG NO. 27034040	REV. A1
				SCALE N:S	SHEET 1 OF 1