

DESCRIPTION:

PLANAR MONOLITHICS INDUSTRIES MODEL NUMBER
LM-6G18G-15-10W-SFF-OPT1114 IS A HIGH POWER LIMITER THAT WORKS FROM
11.0 TO 14.0 GHz.

SPECIFICATIONS:

- FREQUENCY: 11.0 TO 14.0 GHz
- INPUT POWER: 20 WATTS (43 dBm)
- PULSE WIDTH: 1 ms
- DUTY CYCLE: 20%
- FLAT LEAKAGE: 18 dBm MAXIMUM
- CONNECTORS: SMA FEMALE (INPUT AND OUTPUT)
- SIZE: 1.00 X 1.00 X .500 (H)
- WEIGHT: 1.5 OZ. TYPICAL

ENVIRONMENTAL RATINGS


- TEMPERATURE: -40°C TO + 85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	09/08/16	

MECHANICAL OUTLINE

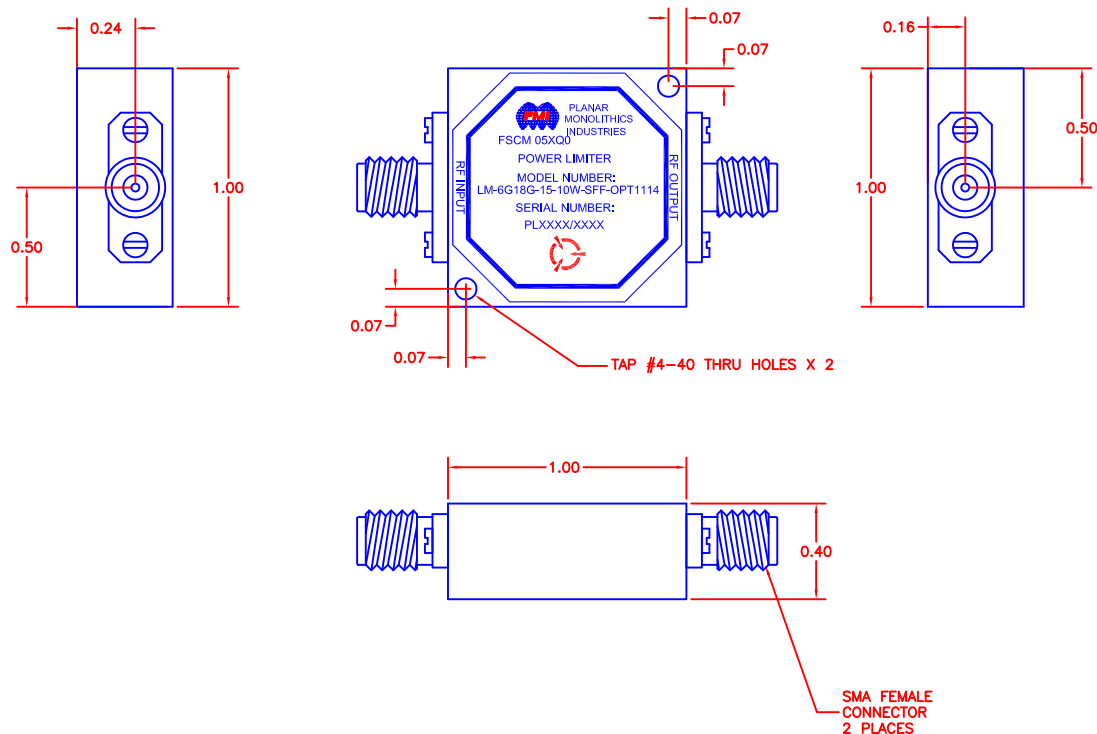

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN	EMF	09/08/16		PRODUCT FEATURE	
CHECKED				LM-6G18G-15-10W-SFF-OPT1114	
ISSUED					
SIZE		FSCM NO.		DWG NO.	
A		05XQ0		PRELIMINARY	
SCALE		N:S		SHEET	
				1 OF 1	