

DESCRIPTION:



PMI MODEL NUMBER DTA-13G14G-40-8-CD-1-20DBM IS AN 8-BIT PROGRAMMABLE 40 dB PIN DIODE ATTENUATOR OVER THE FREQUENCY RANGE OF 13.0 TO 14.0 GHz. THIS MODEL IS OFFERED IN A SLIM LINE HOUSING MEASURING ONLY 0.5" IN HEIGHT.

SPECIFICATIONS:

- FREQUENCY RANGE: 13.0 TO 14.0 GHz
- ATTENUATION RANGE: 40 dB MIN
- INSERTION LOSS: 5 dB MAX
- STEP SIZE: 0.25 dB (LSB)
- ADJUSTMENT STEP SIZE ACCURACY: ± 0.125 dB
- PHASE VARIATION VS ATTENUATOR STEP SIZE: 1.5°/dB TYP
2°/dB MAX 0 TO 40 dB ATTENUATION
- INPUT 0.1 dB COMPRESSION POINT: +20 dBm MIN
- MONOTONICITY: GUARANTEED
- VSWR: 2.0:1 MAX
- SWITCHING TIME:
 - ON TIME 1.0 us MAX
 - OFF TIME 0.5 us MAX
- LOGIC INPUT:
 - LOGIC "0" (BIT OFF) -0.3 TO +0.8 V
 - LOGIC "1" (BIT ON) +2.0 TO +5.0 V
- DC POWER SUPPLY: +12 V @ 150 mA MAX
- CONNECTORS: 2 SMA & 15 PIN MICRO-D FEMALE
- FINISH: PAINTED BLUE

PIN NO:	J3 PIN FUNCTIONS
1	2 dB
2	1 dB
3	0.5 dB
4	0.25 dB (LSB)
5	GND
6	NC
7	NC
8	GND
9	NC
10	NC
11	+12 VDC
12	32 dB (MSB)
13	16 dB
14	8 dB
15	4 dB

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	INITIAL RELEASE	3/18/2019	

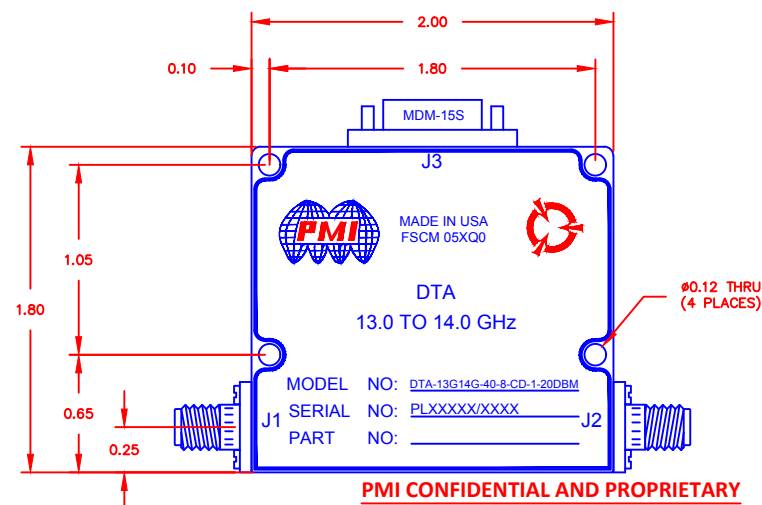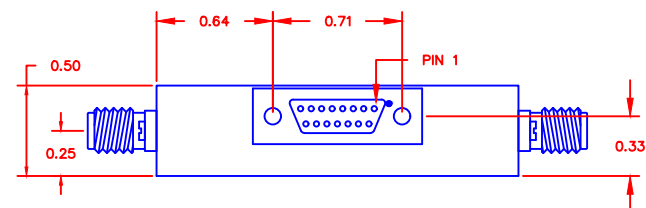

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -40°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN <i>fk</i>		10/15/12	PRODUCT FEATURE			
REDRAWN <i>EW</i>		2/5/19	DTA-13G14G-40-8-CD-1-20DBM			
ISSUED <i>GR</i>		3/18/19	SIZE A	FSCM NO. 05XQ0	DWG NO. 27036480	REV. A1
			SCALE N:S		SHEET 1 OF 1	

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION