

# KR 2388 Root Raised Cosine Filter

## General Description

KR Electronics designs and manufactures filters that approximate the raised cosine response. These filters are available as both the cosine response and the root cosine response. Symbol rates to 75 MHz have been designed. They are also available with and without  $\sin(x)/x$  compensation. Various roll off factors  $\alpha$  are also available. Typical values for  $\alpha$  fall in the 0.3 to 0.5 range.

KR's filters closely match the mathematical ideal response to the -12 dB frequency and are most often designed for linear phase to the -3 dB response. Phase matching in pairs is also commonly specified. KR 2388 is a root raised cosine filter without  $\sin(x)/x$  compensation,  $F_s=2$  MHz and  $\alpha=0.35$ . The typical response of KR 2388 root raised cosine is shown in the plots below.

## Features

- Root raised cosine response
- Closely matches the ideal response
- $\sin(x)/x$  available
- Equalized for linear phase
- Supplied in phase matched pairs

## Typical Performance

Figure 1 shows the ideal response, while Figures 2-6 show actual measured data from a typical filter.

**Ideal Response**  
(5 dB/div) 0.1 to 1.5 MHz

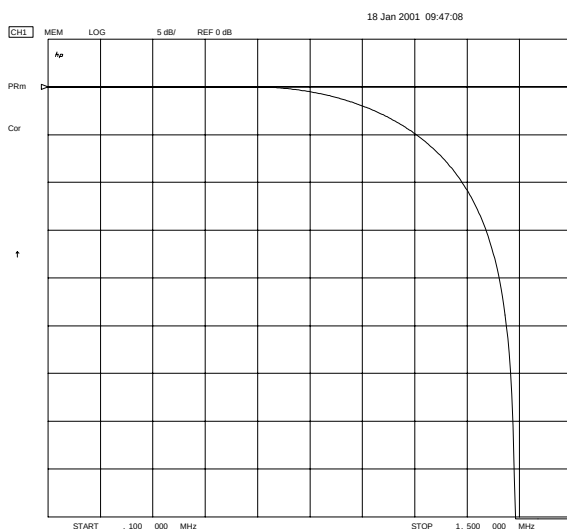


Figure 1

**Actual Filter Response**  
(5 dB/div) 0.1 to 1.5 MHz

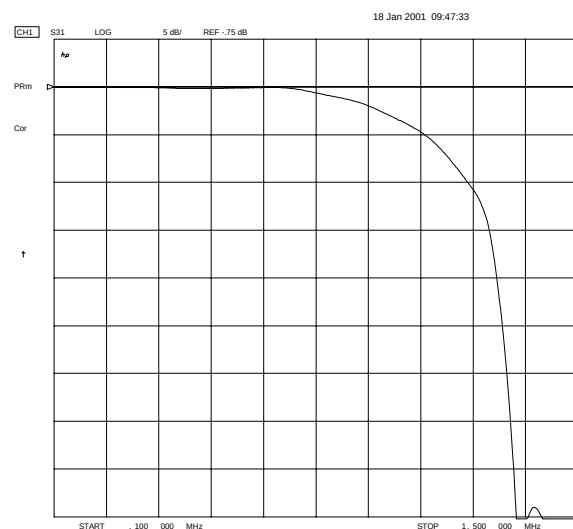


Figure 2

# KR 2388 Root Raised Cosine Filter

## Typical Performance (cont.)

**Deviation From Ideal Response**  
(1 dB/div) .1 to 1.5 MHz

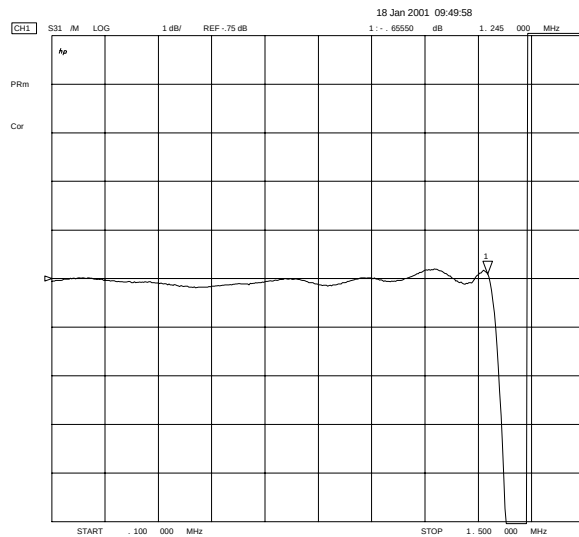


Figure 3

**Overall Frequency Response**  
(10 dB/div) .1 to 10 MHz

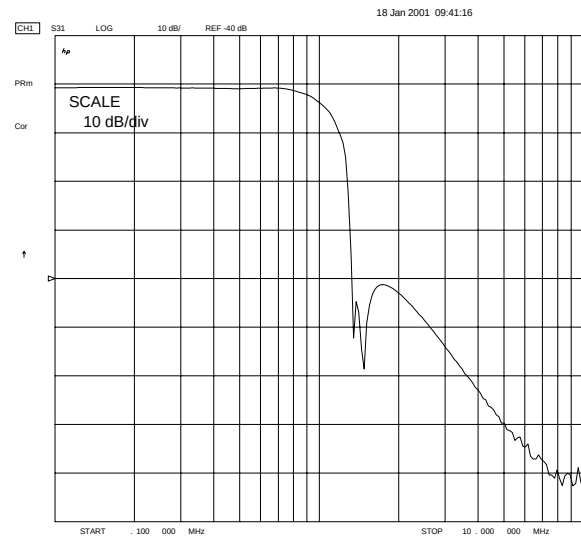


Figure 4

**Deviation From Linear Phase**  
(2°/div) .1 to 1.5 MHz

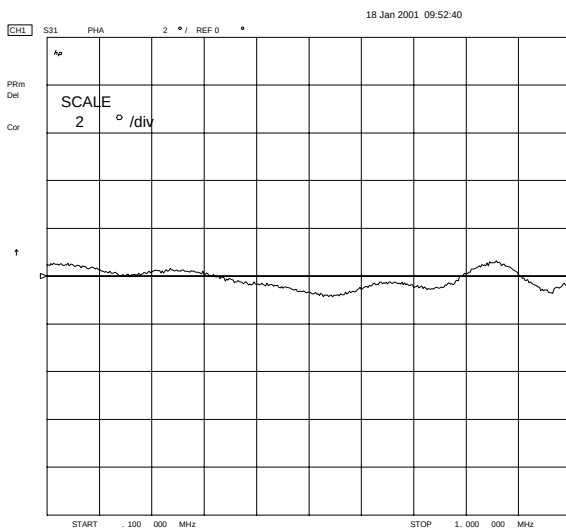


Figure 5

**Phase Match Between Pairs**  
(2°/div) .1 to 1.5 MHz

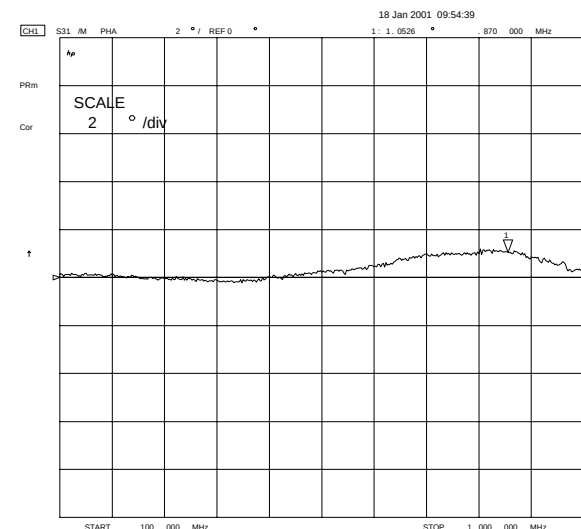



Figure 6

# KR 2388 Root Raised Cosine Filter

## Specifications

| Parameter                   | Specification                            |
|-----------------------------|------------------------------------------|
| Filter type                 | Root Raised Cosine                       |
| Rolloff factor ( $\alpha$ ) | 0.35                                     |
| Fs                          | 2 MHz                                    |
| Source and load impedance   | 50 $\Omega$                              |
| Deviation from ideal        | < $\pm 1$ dB to the -12 dB frequency     |
| Deviation from linear phase | < $\pm 2.5^\circ$ to the -3 dB frequency |
| Phase match in pairs        | < $\pm 2.5^\circ$ to the -1 dB frequency |

## Physical Dimensions

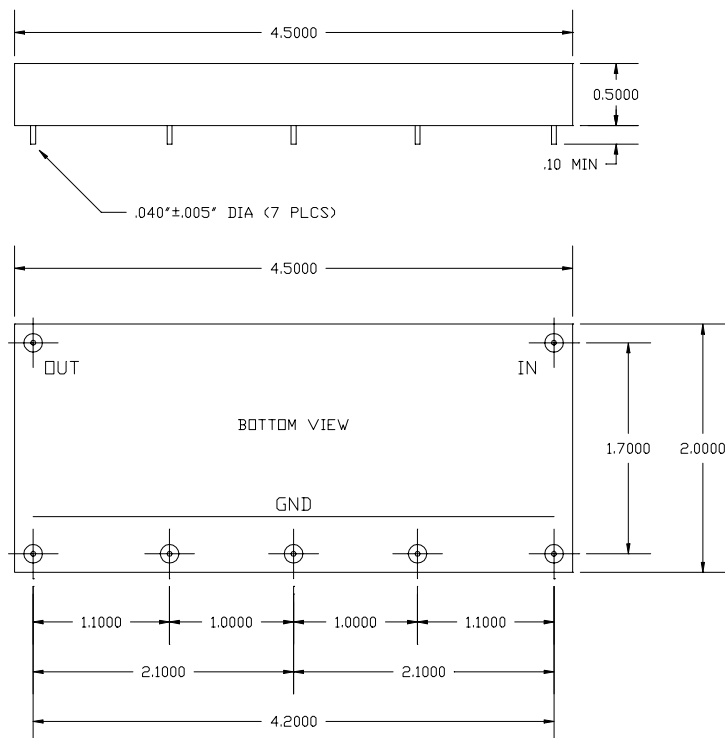

NOTES:  
1. TOLERANCE  $\pm .010$  UNLESS OTHERWISE SPECIFIED

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982