


General Description

KR Electronics part number 3395+ is a 225 MHz lowpass filter. The filter has a minimum 1.5 dB bandwidth of 225 MHz and 40 dB minimum attenuation from 278.2 to 1000 MHz. Other frequencies are available. Please consult the factory.

Features

- 225 MHz Lowpass Filter
- Sharp Elliptic Type Design
- 50 Ω Source and Load
- Surface mount
- Also available with SMA Connectors


Typical Performance

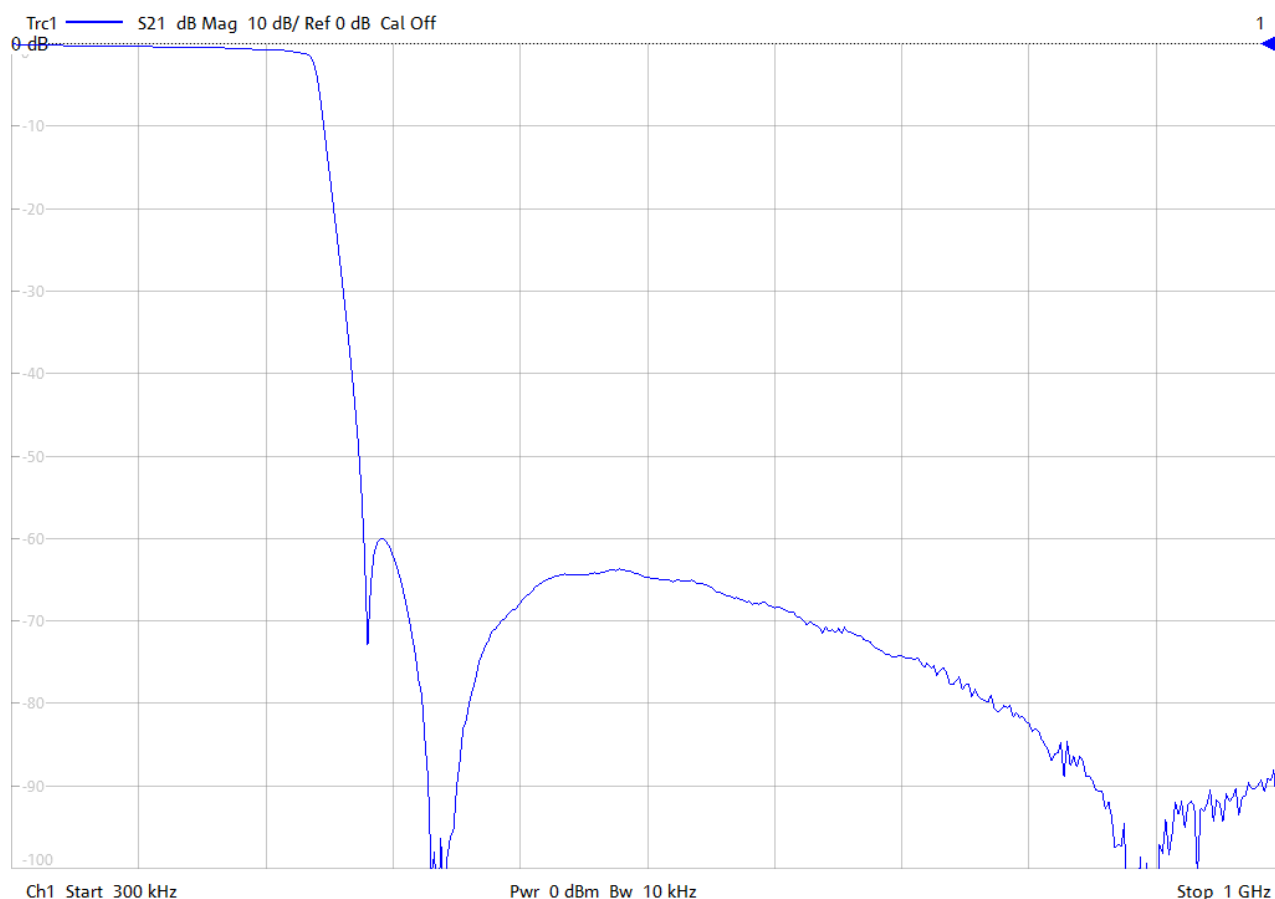

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3395+

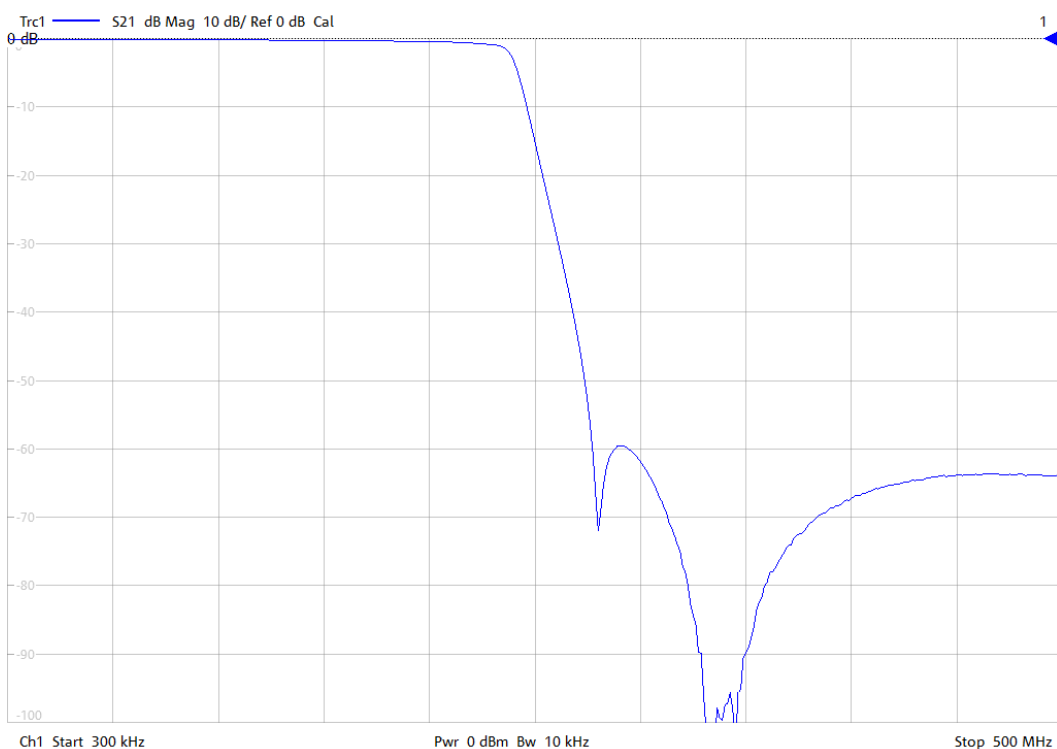

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3395+

Specifications

Parameter	Specification	
Filter type	Lowpass	
Insertion Loss DC to 225 MHz	1.5 dB max	<1dB typical
Rejection at 278.2 MHz to 1000 MHz	40 dB min	60 dB typical
Source and Load	50 Ω	

Physical Dimensions

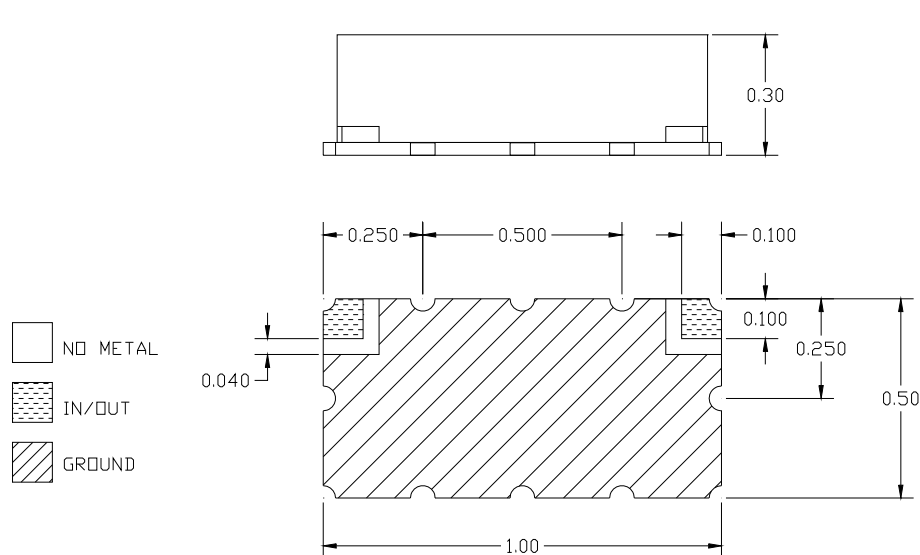

Notes:

1. Surface mount package
2. Dimensions in inches
3. Max reflow temperature 230° C for 10 sec
4. If boards are cleaned after installation units must be completely dried

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web: www.krfilters.com
Email: sales@krfilters.com
Phone: (732) 636-1900
Fax: (732) 636-1982