


RADITEK INC.

RSYNTH-L514-10.435-10.625(15M)-Sf-20d10V-IR100M-L1

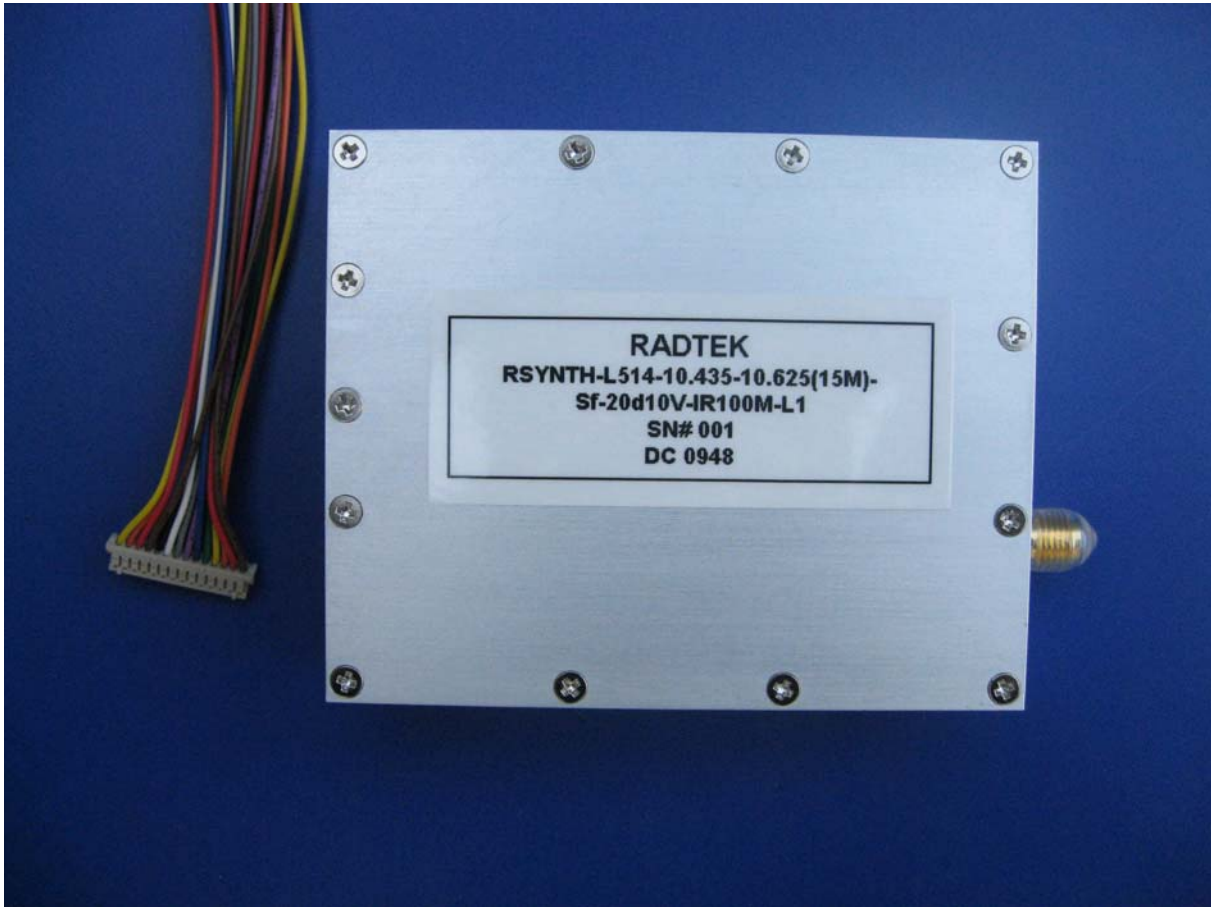

Synthesized Phase Lock Oscillator: Synthesizer, 10.435-10.615GHz, 20dBm, with 13 frequency outputs, in 15MHz Step Size, SMA Female Connectors, +12Volts. This high performance Synthesizer is a cost effective solution to generate RF Output frequencies and can be set with 100KHz accuracy. Options: External Reference options: ER100M or ER10-90M (in 10MHz increments). Internal Reference IR 1ppm (0.1ppm optional). These units are proven in the field and are fully ROHS compliant. Dimensions: 65(2.56") x 80(3.15") x 21(0.83") mm(in).

RADITEK specializes in Design, Development, Manufacturing of "High Volume/Low Cost" Wireless and Microwave products.

Please see our website at <http://www.raditek.com/> or email us at Sales@Raditek.com with any questions you may have.

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com