

KR Electronics


General Description

KR Electronics part number 3398-BNC is a 1 KHz elliptic type highpass filter. The rejection below 870 KHz is 25 dB minimum. Other passband frequencies are available. Please consult the factory.

Features



- 1 MHz Highpass
- Sharp Transition to Stopband
- Elliptic Type Response
- BNC Connectors
- 50 Ω Source and Load

Typical Performance

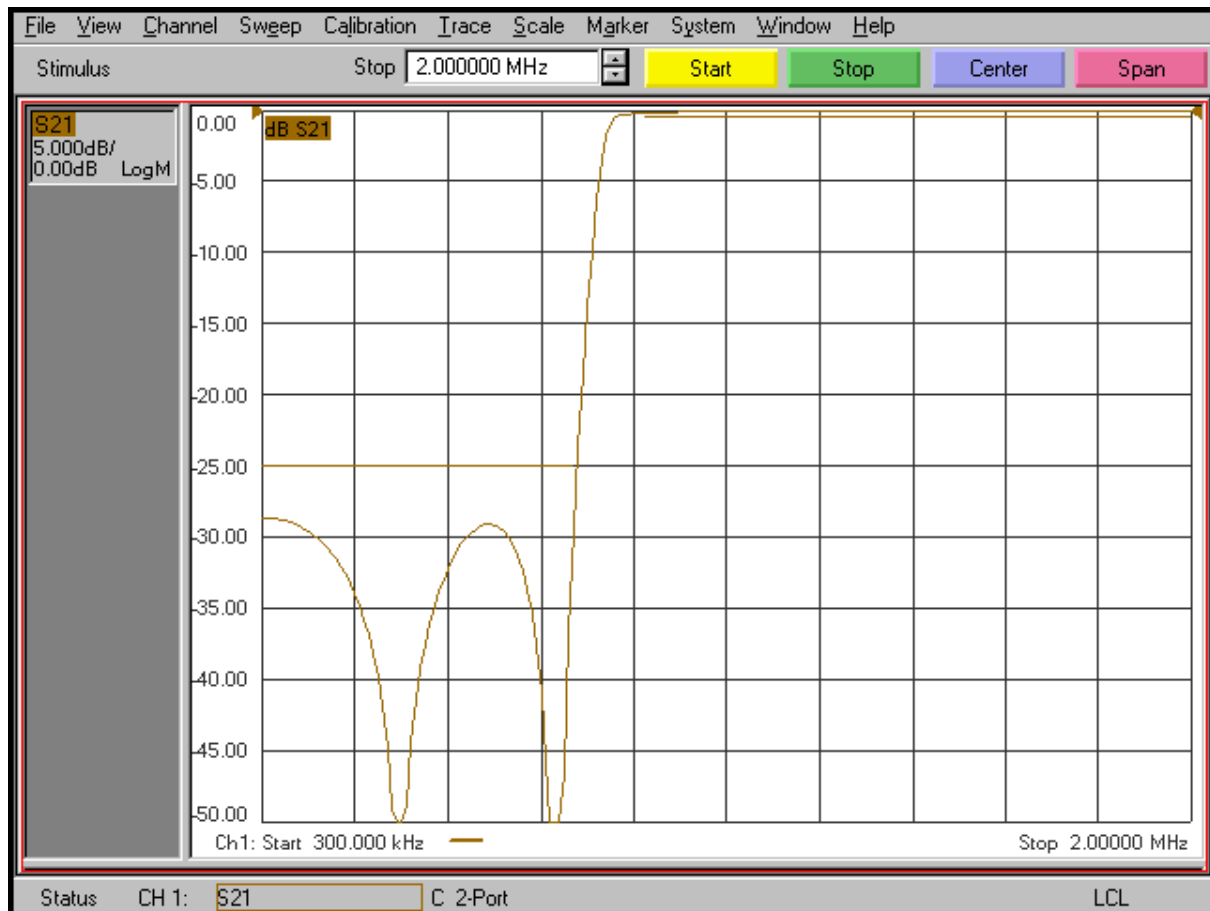

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

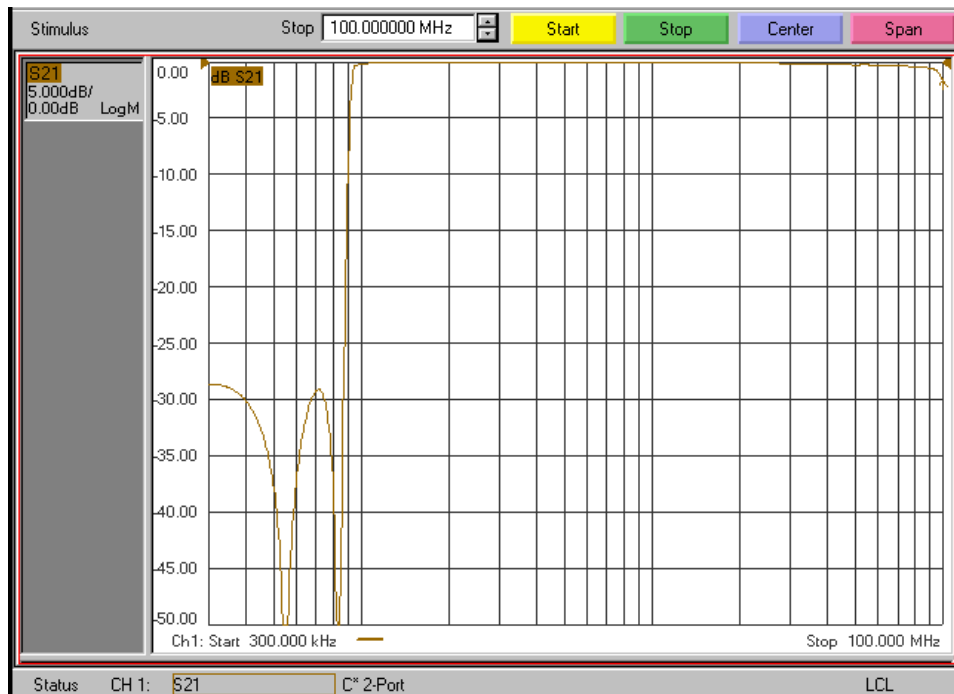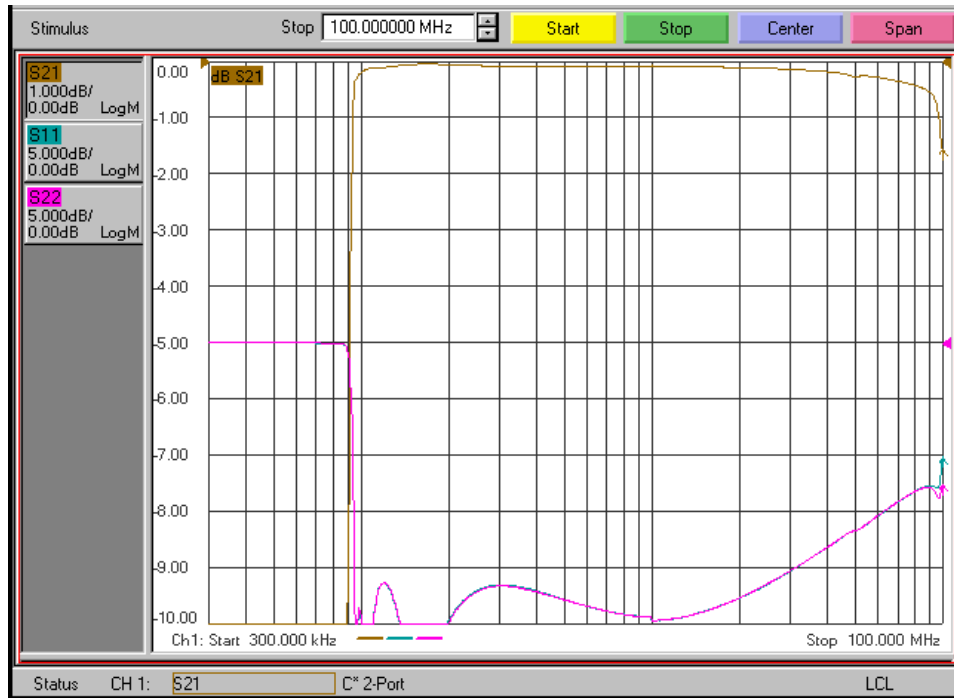


KR Electronics 3398-BNC

Specifications

Parameter	Specification
Filter type	Highpass
Rejection at 870 KHz & below	25 dB min
Passband 1 MHz to 10 MHz	0.5 dB max
Source and Load	50 Ω

Physical Dimensions

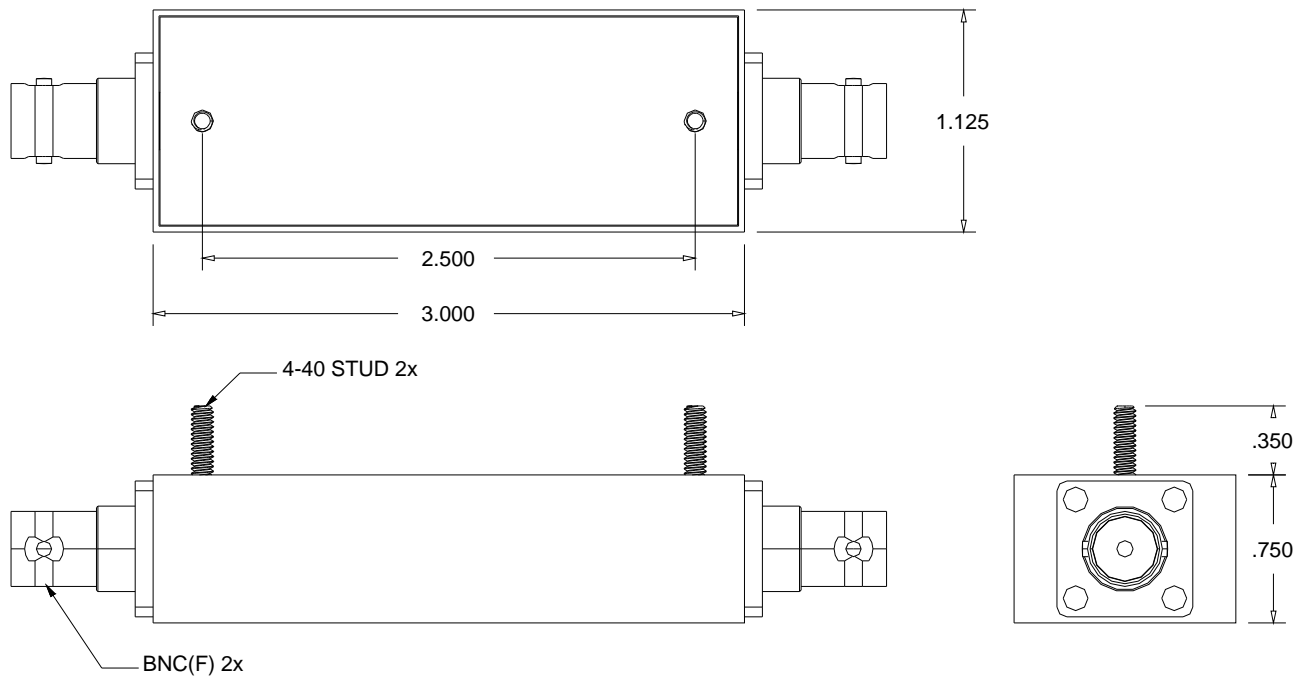

Notes:

1. Dimensions in inches
2. BNC(f) connectors 2 plcs
3. Other Case sizes and configurations available

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982