

General Description


KR Electronics part number 3255-805-HP-SMA is a 805 MHz highpass filter. Other cutoff frequencies are available. Please consult the factory.

Features

- 805 MHz Highpass Filter
- < 1.5 dB typical at 805 MHz
- 50 dB min at 500 MHz
- 50 Ω Source and Load
- SMA Connectors
- SMD Available
- Other frequencies available

Typical Performance


Overall Response (10 dB/div)

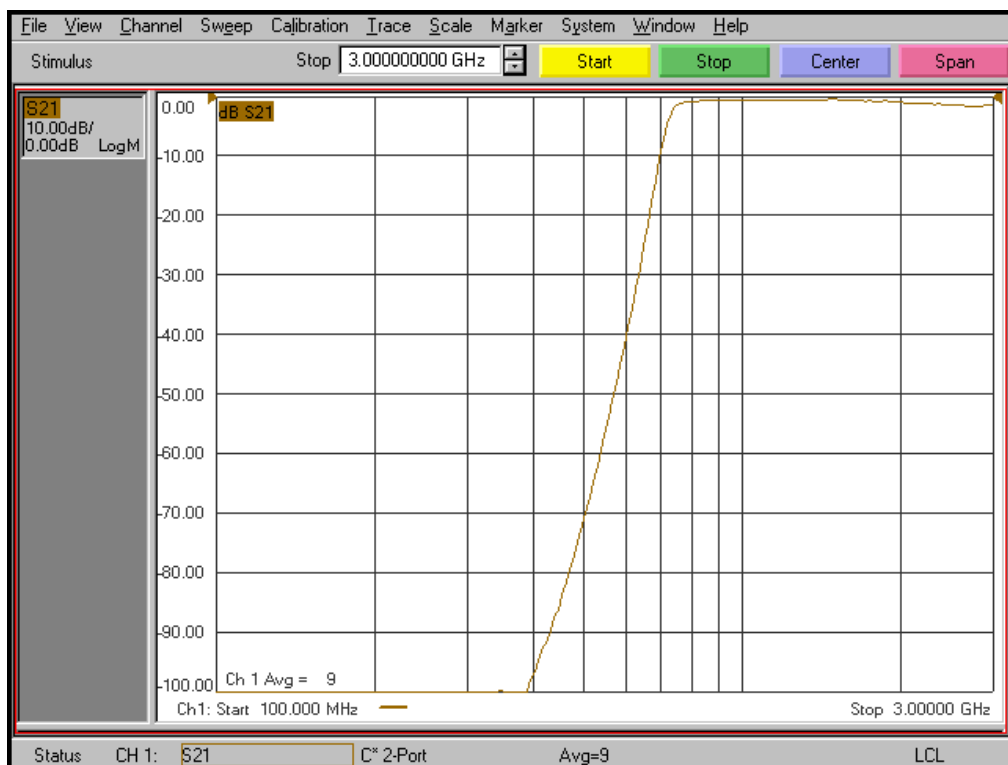

KR Electronics 3255-805-HP-SMA


Passband Amplitude

(1 dB/div)

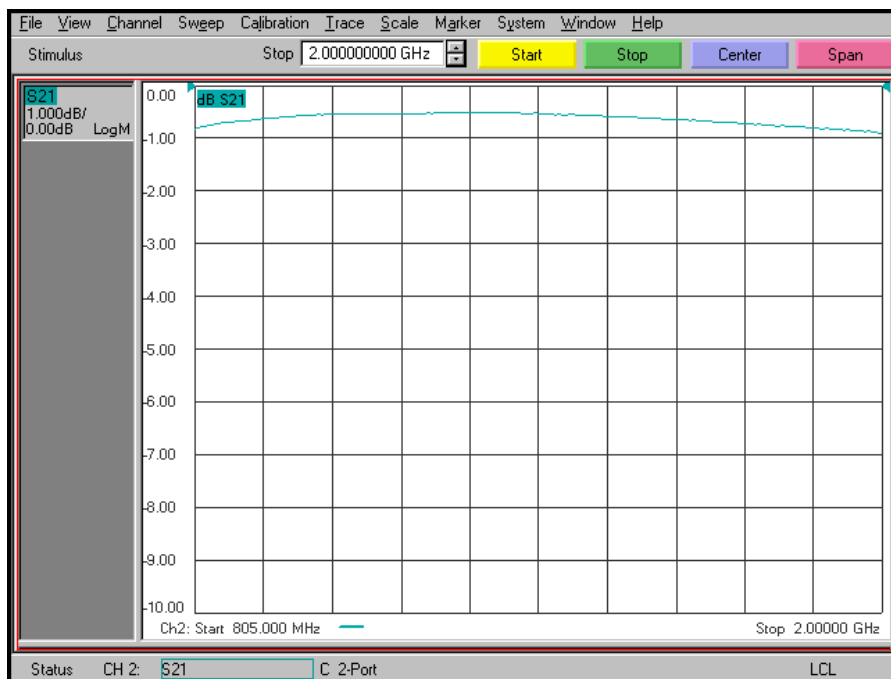

Overall Response

(10 dB/div)

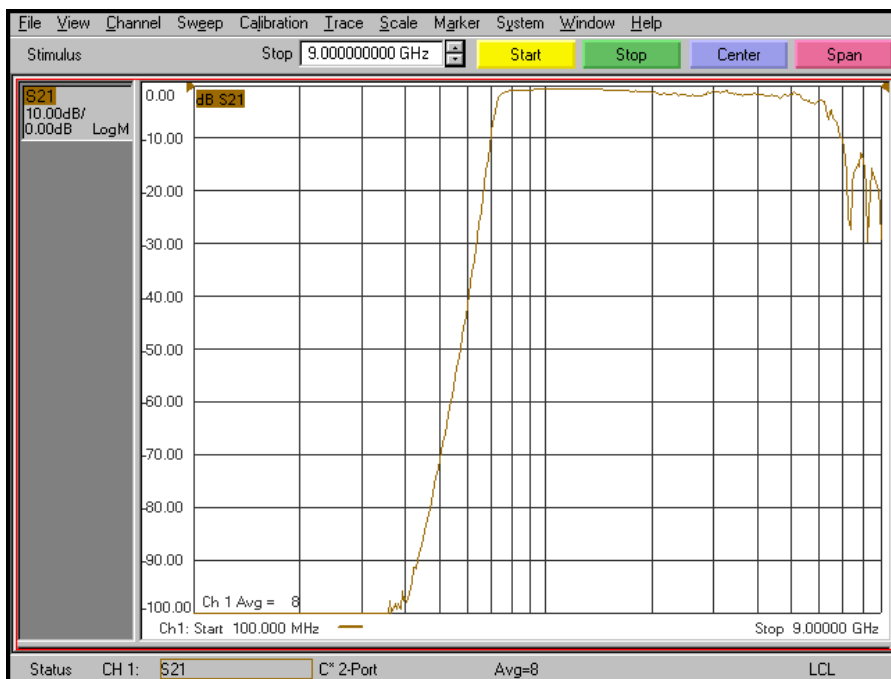

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web
Email
Phone
Fax


www.krfilters.com
sales@krfilters.com
(732) 636-1900
(732) 636-1982

KR Electronics 3255-805-HP-SMA

Specifications

Parameter	Specification	Notes
Filter type	Highpass	
Attenuation 805 to 2000 MHz	1.5 dB max	
Attenuation dc to 500 MHz	50 dB min	70 dB typical
Source and Load	50 Ω	

Physical Dimensions

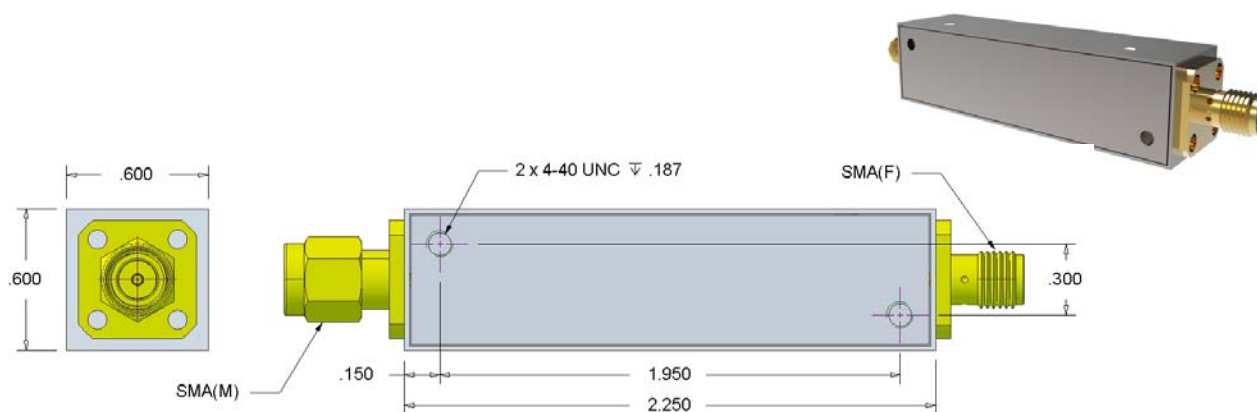

Notes:

1. Dimensions in inches
2. Rectangular case
3. Also available in surface mount

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982