

General Description


KR Electronics part number 3345-85.3-SMA is a 85.3 MHz notch filter. The filter has a typical 3 dB bandwidth of 66 MHz min. Other center frequencies and bandwidths are available. Please consult the factory.

Features

- 85.3 MHz Notch Filter
- 3 dB Bandwidth 66 MHz typical
- 50 Ω Source and Load
- SMA Connectors

Typical Performance

Overall Response (10 dB/div)

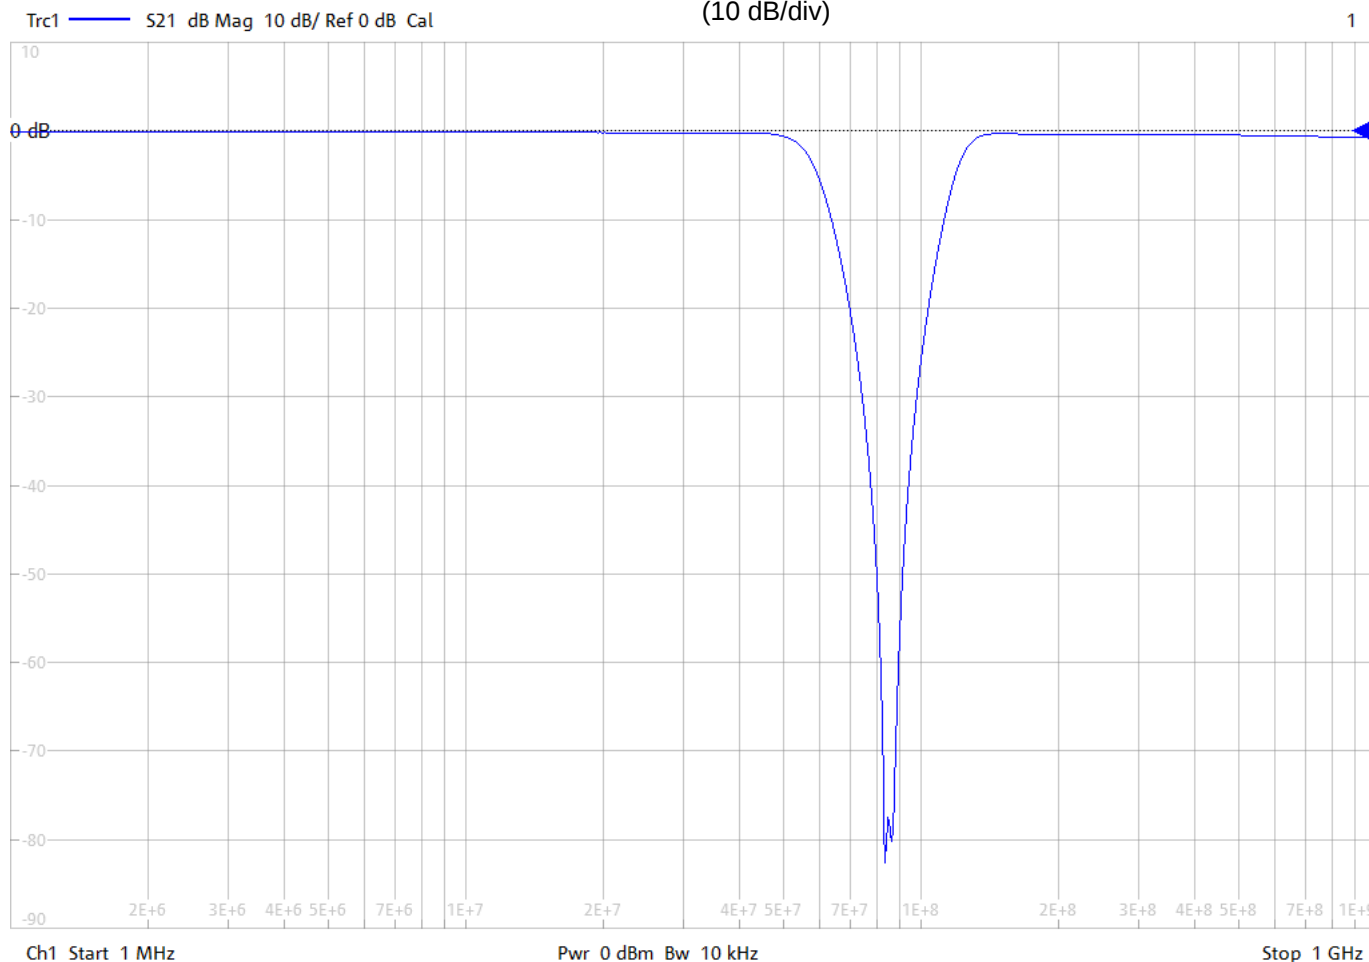

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3345-85.3-SMA

Specifications

Parameter	Specification	
Filter type	Notch	
Notch Frequency	85.3 MHz	
1 dBc Bandwidth	79 MHz typical	
3 dBc Bandwidth	65.6 MHz typical	
40 dBc Bandwidth	16.2 MHz typical	
60 dBc Bandwidth	7.8 MHz typical	
Rejection at 85.3 MHz	40 dBc min	>60 dBc typical
Source and Load	50 Ω	

Physical Dimensions

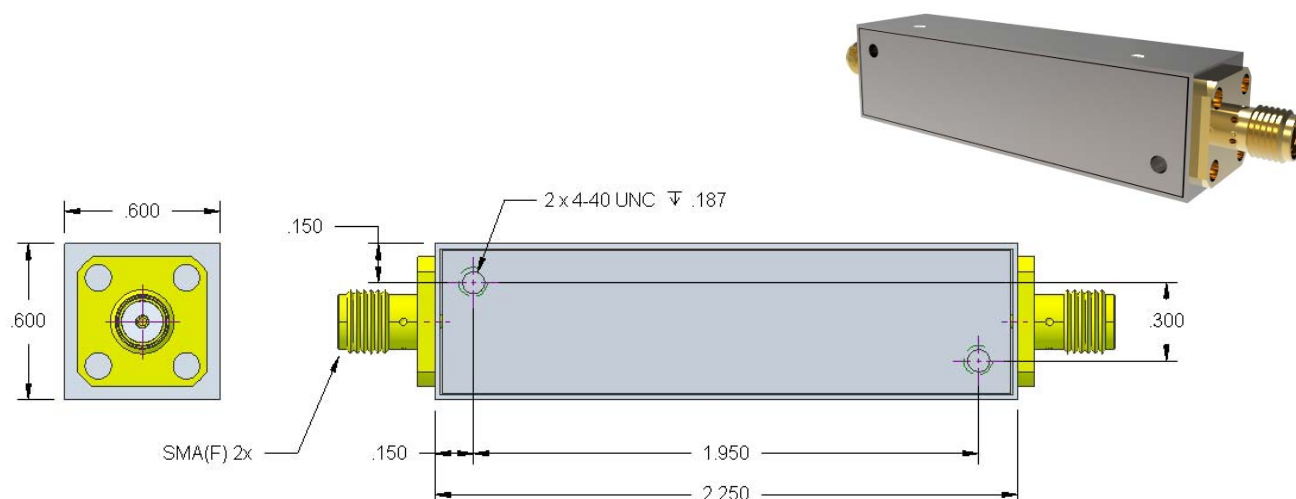

Notes:

1. Dimensions in inches
2. Rectangular case

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web: www.krfilters.com
Email: sales@krfilters.com
Phone: (732) 636-1900
Fax: (732) 636-1982