

KR Electronics, Inc.

General Description


KR Electronics part number 3077-SMA-SMA is a 50 MHz band-pass filter. The filter has a 3 dB bandwidth of 10 MHz and maximum 55 dB bandwidth of 24 MHz. Other center frequencies and bandwidths are available. Please consult the factory.

Features

- 50 MHz Bandpass Filter
- 10 MHz 3 dB Bandwidth
- Sharp Elliptic Type Design
- 50 Ω Source and Load
- SMA Connectors
- Also available as surface mount

Typical Performance

Overall Response (10 dB/div)

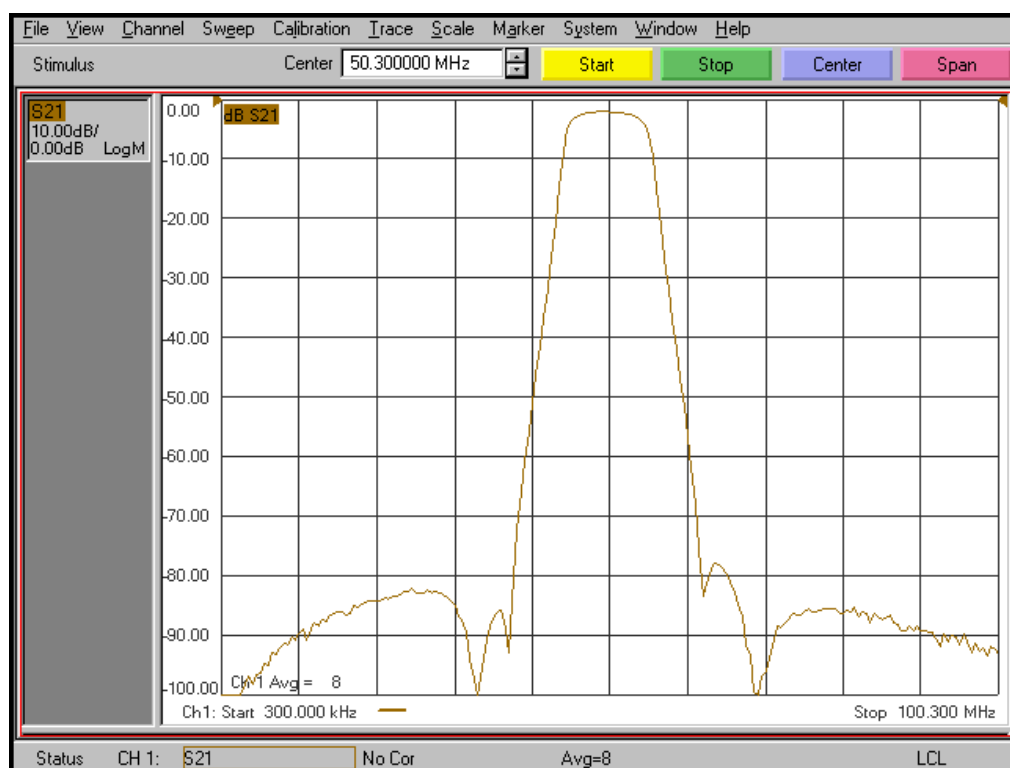


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3077-SMA


Passband Amplitude & Group Delay

(1 dB/div & 50 nsec/div)

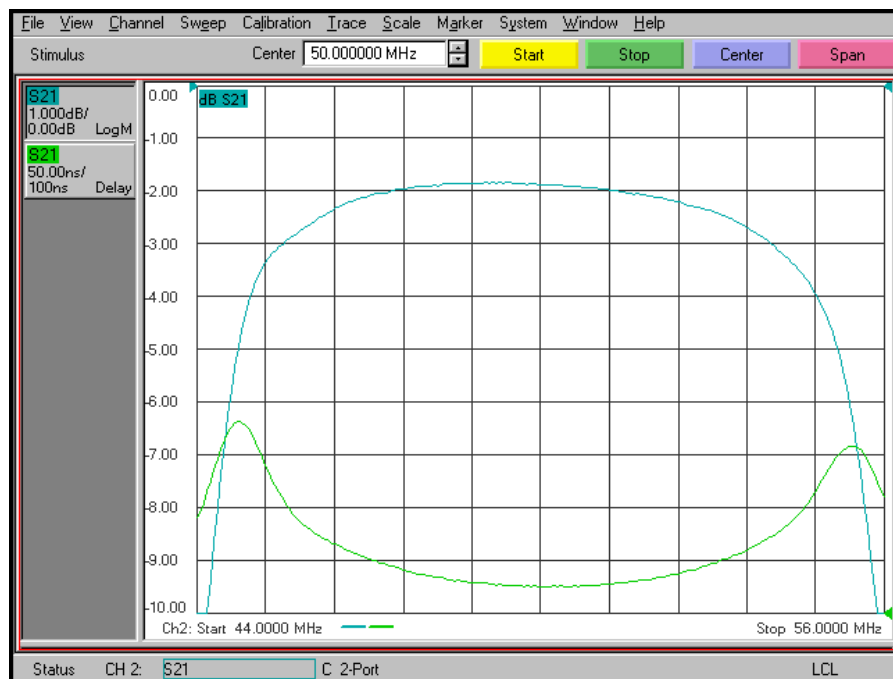

Overall Response

(10 dB/div)

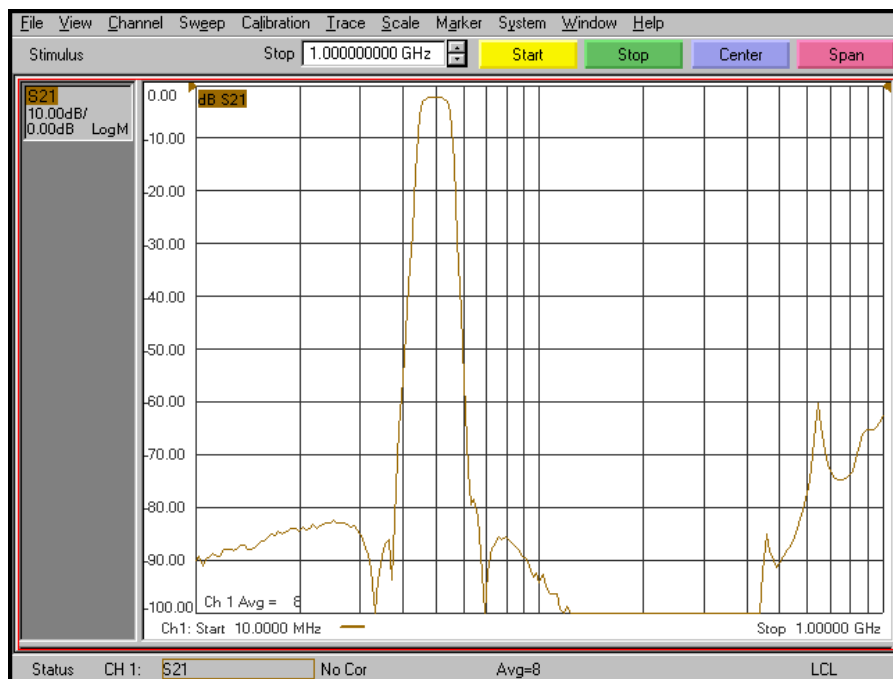

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web
Email
Phone
Fax


www.krfilters.com
sales@krfilters.com
(732) 636-1900
(732) 636-1982

KR Electronics 3077-SMA

Specifications

Parameter	Specification	
Filter type	Bandpass	
Center Frequency	50 MHz	
Insertion Loss	3.5 dB max	2 dB typical
1 dB Bandwidth	7.8 MHz typical	
3 dB Bandwidth	10 MHz $\pm$ 0.5 MHz	
40 dB Bandwidth	17.5 MHz typical	
55 dB Bandwidth	24 MHz max	>55 dBc at 38 & 62 MHz
60 dB Bandwidth	22 MHz typical	
Source and Load	50 Ω	

Physical Dimensions

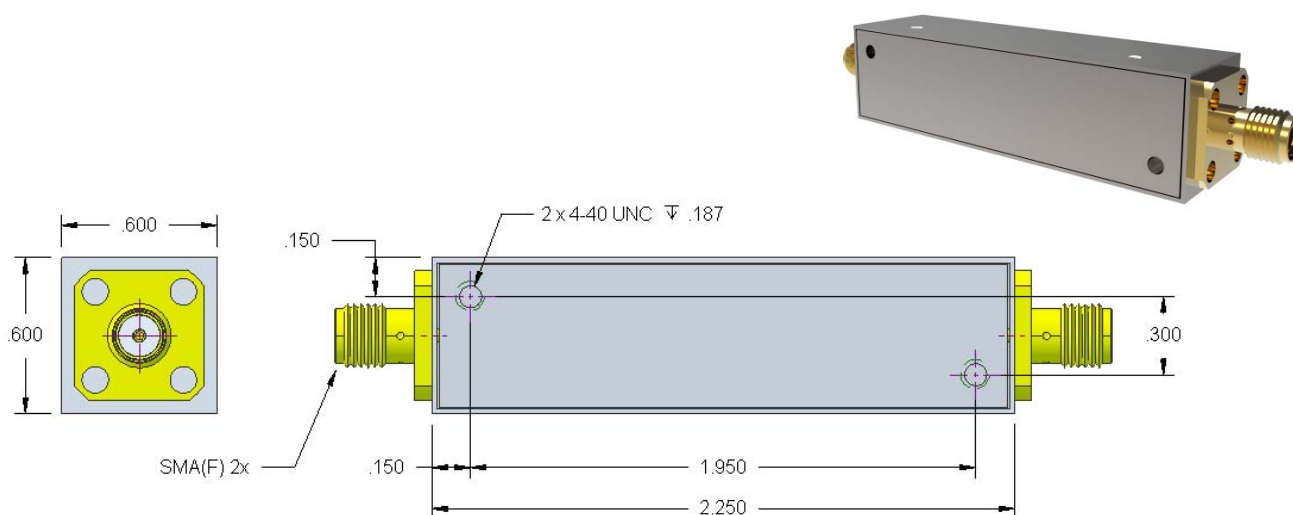

Notes:

1. Dimensions in inches
2. Rectangular case
3. Also available in surface mount package

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982