

KR Electronics, Inc.

General Description


KR Electronics part number 3169-SMA is a group delay equalized 70 MHz bandpass filter. The filter has a min 3 dB bandwidth of 60 MHz. Other center frequencies and bandwidths are available. Please consult the factory.

Features

- 70 MHz Bandpass Filter
- 60 MHz min 3 dB Bandwidth
- Group Delay Equalized for Linear Phase
- Highly Selective Elliptic Type Filter
- 50 Ω Source and Load
- SMA Connectors
- Surface mount available

Typical Performance

Overall Response (10 dB/div)

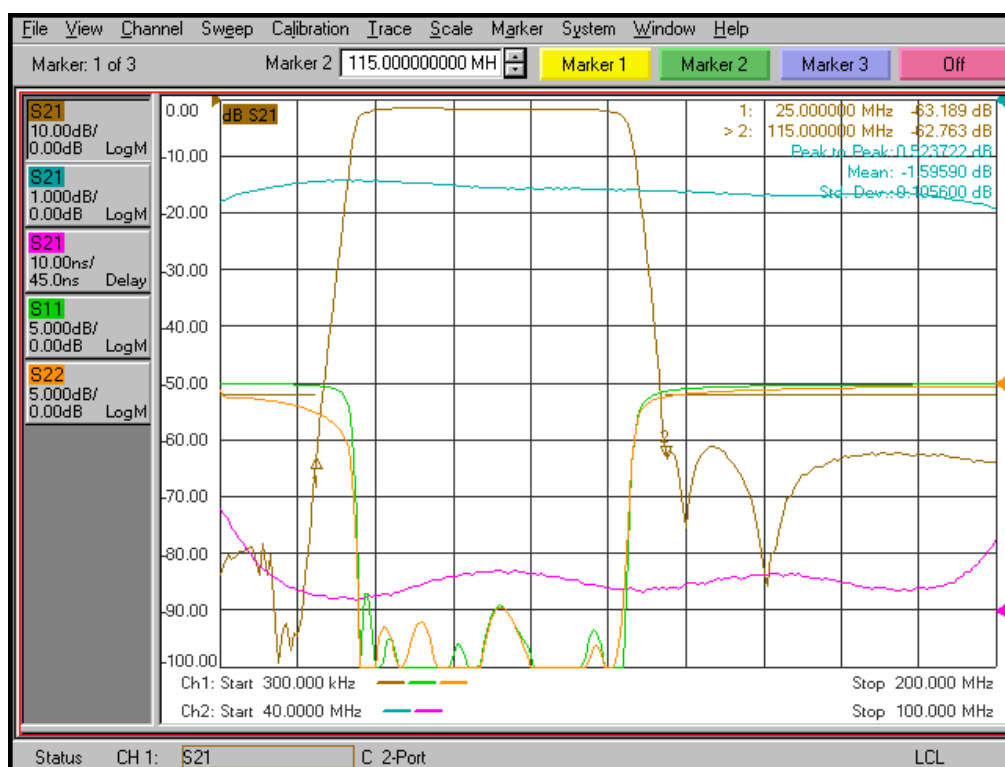


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web: www.krfilters.com
Email: sales@krfilters.com
Phone: (732) 636-1900
Fax: (732) 636-1982

Typical Performance

Passband Amplitude & Group Delay (1 dB/div & 10 nsec/div)

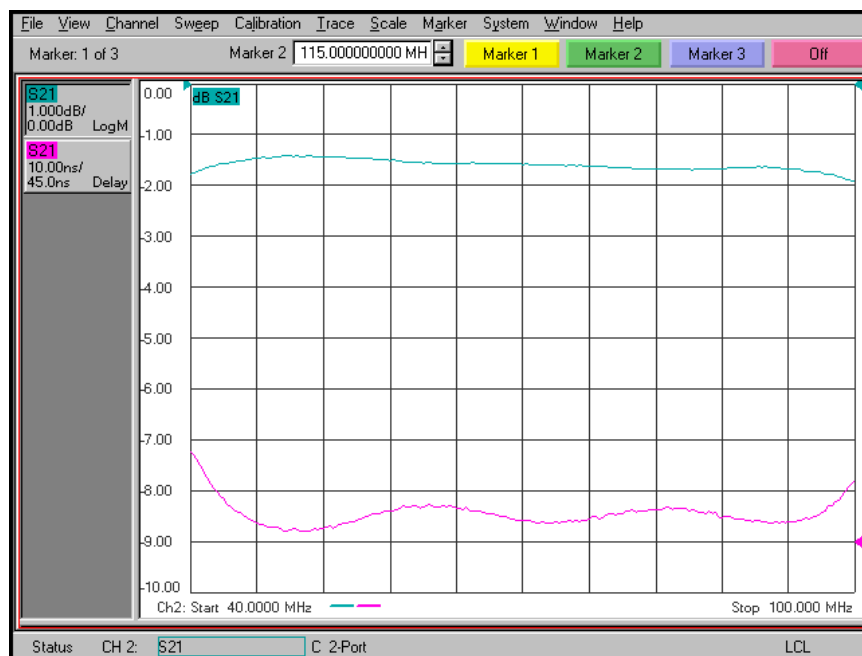

Overall Response (10 dB/div)

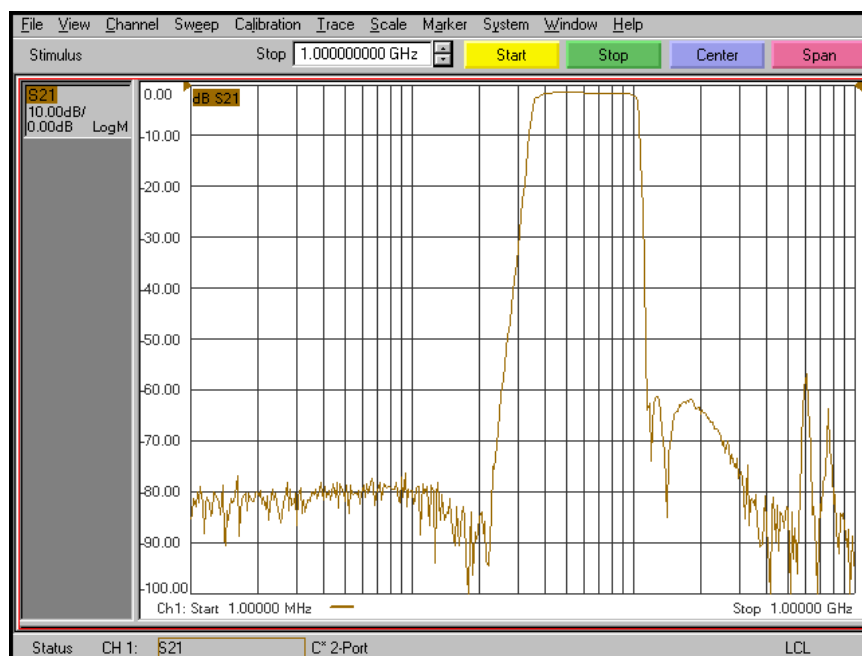

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web: www.krfilters.com
Email: sales@krfilters.com
Phone: (732) 636-1900
Fax: (732) 636-1982

KR Electronics 3169-SMA

Specifications

Parameter	Specification	Notes
Filter type	Bandpass	
Center Frequency	70 MHz	
Insertion Loss	2.5 dBa max	1.6 dBa typical
1 dB Bandwidth	65 MHz typical	
3 dBc Bandwidth	60 MHz min	70 MHz typical
50 dBc min at	25 MHz and 115 MHz	
Source and Load	50 Ω	

Physical Dimensions

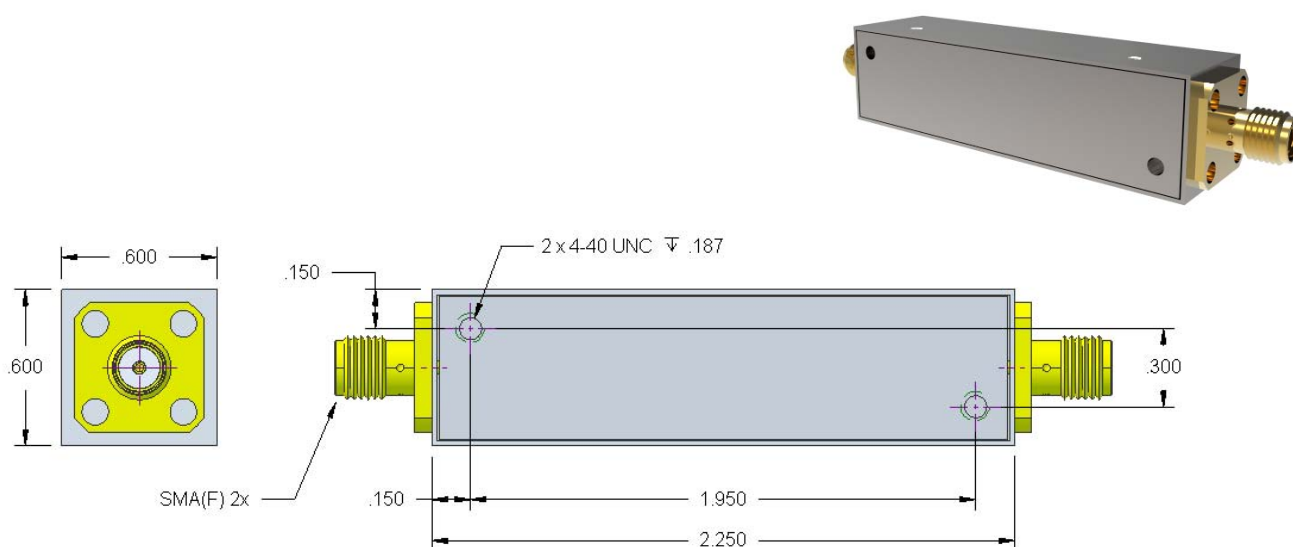

Notes:

1. Dimensions in inches
2. Rectangular case
3. Also available in surface mount package 2" x 0.5" x 0.3"

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982