

High IP3 Frequency Mixer

Level 17 (LO Power +17 dBm) 100 to 1800 MHz

TUF-18DHSM+



CASE STYLE: NNN150

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	4
RF	1
IF	2
GROUND	3
CASE GROUND	3

Features

- low conversion loss, 7.3 dB typ.
- excellent L-R isolation, 41 dB typ.
- high IP3, 27 dBm typ.
- wideband, 100 to 1800 MHz
- rugged welded construction

Applications

- airphone
- cellular
- PCS
- PCN

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 @ CENTER BAND (dBm)
LO/RF	IF	Mid-Band		Total Range Max.	Typ.	Min.	Typ.	Min.	Typ.	
f_L-f_U	\bar{X}	σ	Max.							
100-1800	50-750	7.3	0.15	8.5	9.0	41	23	33	20	27


1 dB COMP.: +10 dBm typ.

m = mid band [$2f_L$ to $f_U/2$]

Outline Drawing

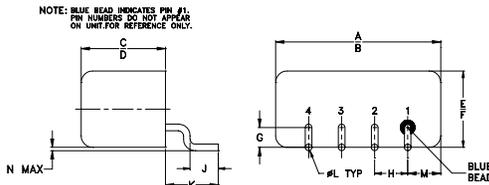

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.50	.48	.255	.240	.23	.21	.06
12.70	12.19	6.48	6.10	5.84	5.33	1.52

H	J	K	L	M	N	wt
.100	.09	.16	.020	.09	.005	grams
2.54	2.29	4.06	0.51	2.29	0.13	1.9

Demo Board MCL PIN : TB-201 Suggested PCB Layout (PL-081)

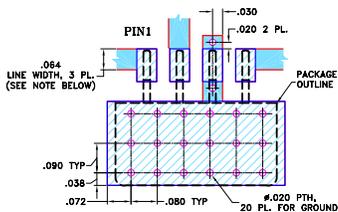

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


Notes







- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
100.00	130.00	7.20	48.50	35.20	2.27	1.15
230.77	260.77	7.23	51.20	35.80	2.23	1.11
300.00	330.00	7.08	52.30	36.30	2.25	1.16
361.54	391.54	7.12	50.40	36.90	1.89	1.18
492.31	522.31	7.10	48.70	36.00	1.92	1.29
500.00	530.00	7.09	48.50	36.00	1.84	1.28
600.00	630.00	7.11	48.10	34.80	1.61	1.28
623.08	653.08	7.07	47.50	34.70	1.52	1.30
700.00	730.00	7.06	46.20	33.60	1.44	1.36
753.85	783.85	7.07	45.90	32.80	1.56	1.38
884.62	914.62	7.09	43.80	31.70	1.27	1.46
1000.00	1030.00	7.04	44.40	30.10	1.22	1.51
1015.39	1045.39	7.03	43.80	30.00	1.25	1.51
1146.15	1176.15	7.23	43.40	29.50	1.32	1.77
1276.92	1306.92	7.31	42.20	28.80	1.68	2.25
1407.69	1437.69	7.34	39.20	29.40	2.30	2.68
1500.00	1530.00	7.38	37.00	29.10	3.57	2.96
1538.46	1568.46	7.38	36.80	28.60	3.57	2.96
1669.23	1699.23	7.39	36.20	28.10	2.92	2.76
1800.00	1830.00	7.83	35.40	28.40	2.76	2.55

Electrical Schematic

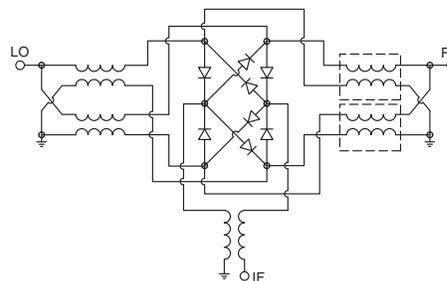

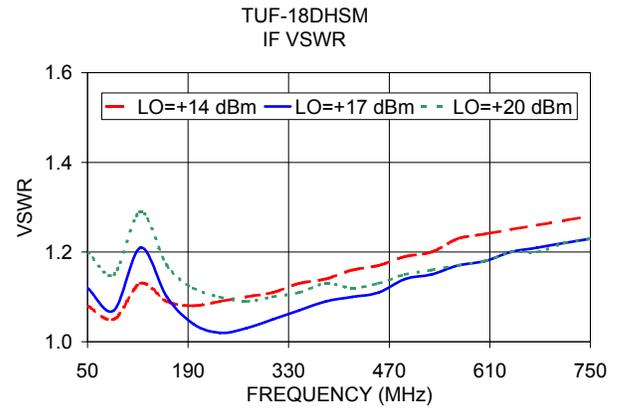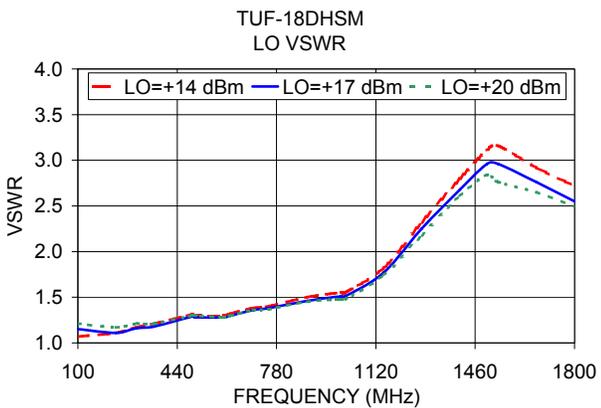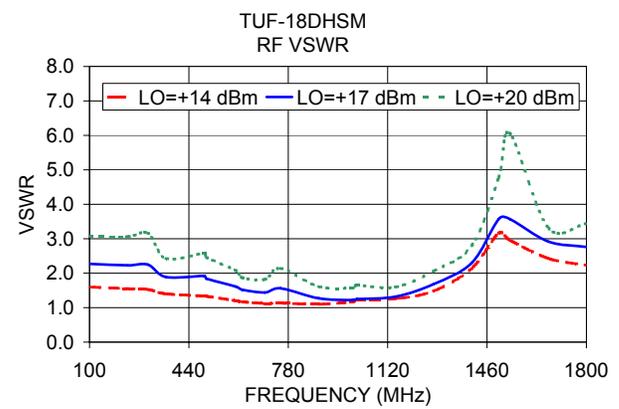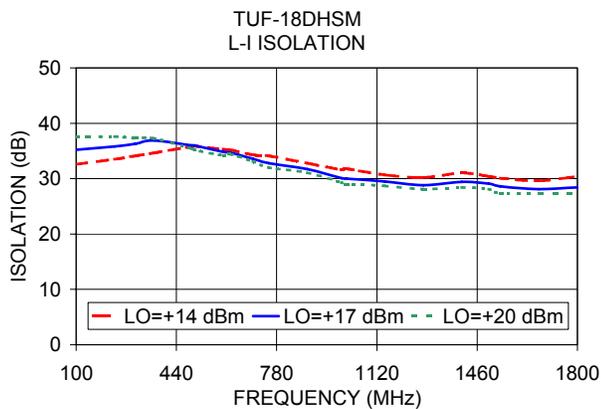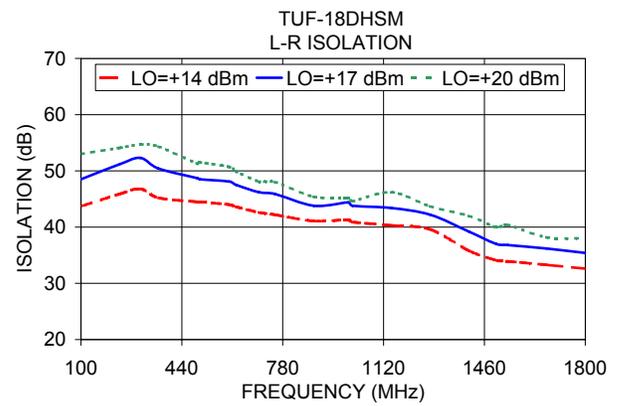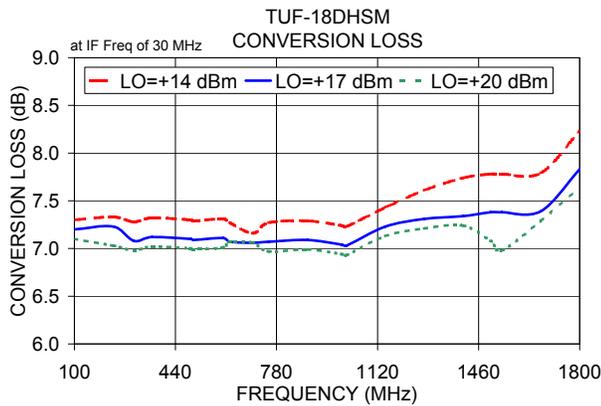

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

