EPL8016A3 Pin-Pin Diode Limiter

8.0-16.0 GHz Octave Band



Technical Characteristics



Product Features

Power Handling: 1 watt CW, 100W peak power

(1 usec Pulse Width, 0.1% Duty Cycle Derated to 20% @ +125 °C)

Internal DC return

Fast recovery time

Limiting threshold above +12dBm typ. & below typical output leakage Low insertion loss

Maximum Ratings

Storage Temperature	65° to +125°C
Operating Temperature	55° to +90°C
Max Input Power	+2 watts CW, 100 watts peak

Product Export Classification


ECCN: EAR 99 (unless otherwise specified) HTS: 85543.70.8000

Specifications @ +25°C & -10 dBm input power.

Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Insertion Loss	8.0 to 16.0		2.0		dB
VSWR	8.0 to 16.0		2.0:1		-
Leakage Power (CW)	8.0 to 16.0			+18	dBm CW
				+20	dBm Peak
Operating Temperature		-55		+90	° C

Outline drawing

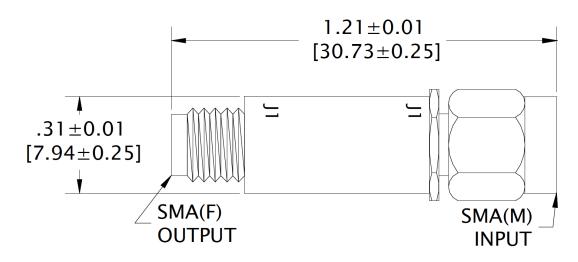

Notes:

1. Limiter has an internal DC block.

2. Typical values are measured at +25°C and are not guaranteed.

1.408.526.1100